

The Darwin Ground-based European Nulling Interferometry Experiment (GENIE)

P. Gondoin^a, O. Absil^c, M. Fridlund^a
C. Erd^a, R. den Hartog^a, N. Rando^a,
A. Glindemann^b, B. Koehler^b, R. Wilhelm^b
A. Karlsson^a, L. Labadie^a, I. Mann^a
A. Peacock^a, A. Richichi^b, Z. Sodnik^a,
M. Tarenghi^b, S. Volonte^a

^aEuropean Space Agency, P.O. Box 299, 2200AG Noordwijk, The Netherlands

^bEuropean Southern Observatory, D-85748 Garching bei Munchen, Germany

^cObservatoire de Paris-Meudon, place Jules Janssen, Meudon France

ABSTRACT

Darwin is one of the most challenging space projects ever considered by the European Space Agency (ESA). Its principal objectives are to detect Earth-like planets around nearby stars and to characterise their atmospheres. Darwin is conceived as a space “nulling interferometer” which makes use of on-axis destructive interferences to extinguish the stellar light while keeping the off-axis signal of the orbiting planet. Within the frame of the Darwin program, the European Space Agency (ESA) and the European Southern Observatory (ESO) intend to build a ground-based technology demonstrator called GENIE (Ground based European Nulling Interferometry Experiment). Such a ground-based demonstrator built around the Very Large Telescope Interferometer (VLTI) in Paranal will test some of the key technologies required for the Darwin Infrared Space Interferometer. It will demonstrate that nulling interferometry can be achieved in a broad mid-IR band as a precursor to the next phase of the Darwin program. The present paper will describe the objectives and the status of the project.

Keywords: Darwin, groundbased interferometry, nulling interferometry

1. INTRODUCTION

Understanding the principles and processes that created the Earth, and allowed the development and evolution of life forms to take place is a key scientific objective which has been brought as a very high priority to the attention not only of the European Science Community but also of the European Space Agency. In particular, the successful detection of Earth-like planets possessing environments benign to life would answer central questions such as “How unique is the Earth as a planet ?” and “How unique is life in the Universe ?”. To achieve these objectives, the Darwin mission of the European Space Agency (Fridlund 2000, 2002) will survey a large sample of nearby stars and search for Earth-size planets within their “habitable zone”. Darwin will measure their spectra in order to infer the presence of an atmosphere and search for biomarkers.

Detection of Earth-size bodies circling nearby stars is extremely difficult because of the weak planetary signal emitted within a fraction of an arcsecond from an overwhelmingly bright star. A solar type star outshines an Earth size planet by a factor of more than 10^9 in the visible wavelength range. In the infrared spectral range, where the planet’s thermal emission increases and the star’s emission decreases, the contrast is still higher than 10^6 . Only the planetary signal, a millionth of the stellar light, should remain in the input feed of a spectrograph in order to register a planet spectrum in a reasonable time. To accomplish such an extinguishing of light at the relevant spatial scales, the technique of “nulling interferometry” has been selected for Darwin. By applying suitable phase shifts between different telescopes in an interferometric array, destructive interference can be achieved on the optical axis of the system in the combined beam while interference is constructive for small off-axis angles. The principle of nulling interferometry for a simple two telescope Bracewell interferometer

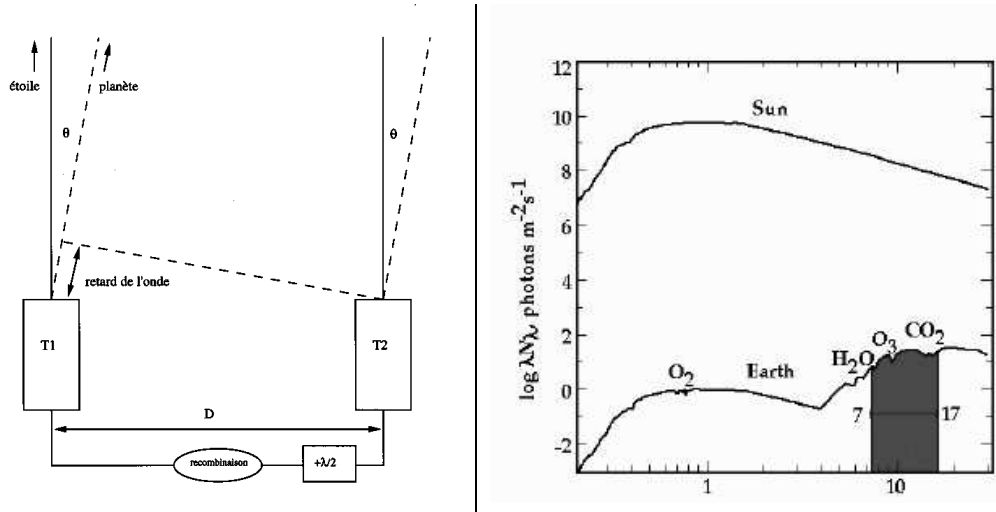


Figure 1. Left: principle of a two telescopes Bracewell interferometer. Right: contrast between the solar flux and the Earth as a function of wavelength in microns. Adapted from Angel et al. (1986).

(Bracewell 1978) is described in Fig. 1. The equivalent transmission map of the nulling interferometer is a set of interference peaks with a sharp null in the centre. By placing the central star under this null, and adjusting the interferometer baseline to the required angular resolution, planets can be detected in the “habitable zone”. The actual shape and transmission properties of the pattern around the central null depend on the configuration and the distance between the telescopes.

2. THE IRSI-DARWIN DEVELOPMENT PROGRAM

The Darwin mission concept (see Fig.2) consists of six 1.5 m telescopes, each of which is a free flying spacecraft transmitting its light to a central beam-combining unit. Using the nulling interferometry technique, the beam combiner extinguish the stellar light by destructive interferences on-axis and transmit the off-axis signal of the orbiting planet. The light from Earth-like planets at interstellar distances of up to 25 parsecs can then be analysed. The mission concept is based on the ability to co-phase telescopes on independent spacecrafts to an accuracy better than 20 nm and to perform nulling interferometry with a rejection factor of $\approx 10^5$ in a wide spectral band extending from 5 to 18 μm . In-orbit co-phasing of the free-flying telescopes is performed in successive steps combining first a local radio-frequency positioning system with milli-Newton propulsion devices, then inter-satellite laser metrology with micro-Newton propulsion devices and finally fringe sensors with optical delay lines. These items are currently developed within the ESA Technology Research Program (TRP). They will then be tested in-orbit within the frame of the ESA SMART technology demonstration program.

In addition to the co-phasing of free-flying telescopes, a second key issue for Darwin is the nulling interferometry technique. Hence, the TRP activities also include the development of Darwin specific optical components, namely achromatic phase shifters, wavefront filtering devices and IR single mode fibres, integrated optics, IR detectors, electronics and coolers, optical delay lines and fringe sensors as well as other components for interferometry. Laboratory nulling breadboards with star-planet simulators are currently under design that will test these components before the end of 2002. These innovative breadboards use the narrow telecommunication band around 1.65 μm where off-the-shelf components are available. Based on their performance, a follow-up activity has been identified which will adapt their design to the mid-IR band and test the nulling interferometry technique on astronomical targets in Darwin representative operating conditions.

The Very Large Telescope Interferometer (VLTI) at the European Southern Observatory (ESO) is the most appropriate infrastructure on-ground to perform such a test. Hence, ESA and ESO initiate a definition study



Figure 2. Left: Artist view of the Darwin Space Interferometer orbiting at Sun-Earth L2 point (courtesy Alcatel Space Division). Right: the ESO Very Large Telescope Interferometer with its four 8.2 meter telescopes and its central interferometric laboratory.

for a Groundbased European Nulling Interferometry Experiment which will operate in the central laboratory of the VLTI at Mount Paranal (Chile). This experiment is called Darwin-GENIE. The definition study will assess the technical feasibility of the experiment and establish its design, performance, programmatics and cost. If successful, the definition study will be the base for ESA and ESO to move into the hardware development, integration and exploitation phases of the GENIE project.

3. DARWIN-GENIE: A TECHNOLOGY DEMONSTRATOR

The primary objective of the Darwin-GENIE nulling experiment is to gain experience on the design , manufacture and operation of a nulling interferometer using Darwin representative concept and technology. Nulling tests with the highest rejection factor on single stars or close binaries in broad mid-IR spectral bands will achieve this objective with the limitations imposed by the turbulence and infrared background of the Earth atmosphere. The Darwin-GENIE experiment will combine all optical functions foreseen into the future Darwin Infrared Space Interferometer. It will benefit from the existing VLTI infrastructure, including the telescopes with chopping and adaptive optics, the delay lines, the fringe sensors and the beam combiner laboratory. The overall performance of the instrument will heavily depend on the performance of all VLTI subsystems and in particular on the adaptive optics and co-phasing subsystems. The GENIE optical bench within the VLTI laboratory will provide the functions specific to the nulling interferometry technique, namely photometry and amplitude control, polarization matching, phase shifting, beam combination and internal modulation, spatial filtering, spectrometry, detection, electronics and cryogenics. The detailed architecture of Darwin-GENIE will be established during the definition study. It will take into account the ESO VLTI interface characteristics and the output of the ESA TRP activities.

4. DARWIN-GENIE: A PREPARATION OF THE DARWIN SCIENCE PROGRAM

Darwin science program aims to detect Earth-like planets around nearby stars, to determine their characteristics, to analyse the composition of their atmospheres and to assess their ability to sustain life as we know it. An important information for a proper design of the direct planet detection experiment of Darwin is the frequency of Earth-like planets around G,K and M dwarfs. The COROT, Eddington and Kepler space missions will detect massive bodies around cool stars by occultation and will thus provide this information. These missions are thus

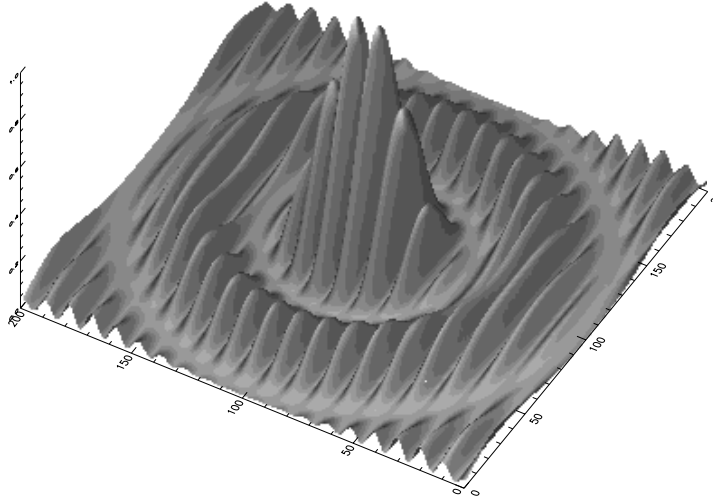


Figure 3. Transmission map of a diffraction limited Bracewell interferometer with circular entrance apertures.

to be considered as true precursors to Darwin. A second objective of GENIE is also to prepare the Darwin science program through a systematic survey of Darwin candidate targets. The solar zodiacal cloud, a sparse disk of 10–100 μ diameter silicate grains, is the most luminous component of the solar system after the Sun. Its optical depth is only $\approx 10^{-7}$, but a patch of the solar zodiacal cloud 0.3 AU across has roughly the same emitting area as an Earth sized planet. Similar and even brighter clouds may be common in other planetary systems and present a severe obstacle for the direct detection of extra-solar terrestrial planets. A systematic survey of Darwin candidate targets will screen-out those stars for which circumstellar dust prevent the detection of Earth-like planets. Bright exozodiacal clouds are easier to detect than extra-solar terrestrial planets, but finding an exozodiacal cloud is still difficult. The total emission from our zodiacal cloud is no more than 10^{-4} of the Sun’s at any wavelength. Photometric surveys like the Infrared Astronomical Satellite (IRAS) survey can only detect exozodiacal clouds that are > 500 times as optically thick as the solar clouds (Backman & Parece 1993). Attempts to spatially resolve faint exozodiacal clouds with single-dish telescopes in the mid-infrared and near infrared (Kuchner & Brown 2000) have not yielded better detection limits. A Bracewell interferometer using two ESO VLTI 8m Unit Telescopes (UT) could provide better performance.

4.1. The Bracewell interferometer: one potential configuration for Darwin-GENIE

The transmission map $T(\theta, \phi)$ of a diffraction limited Bracewell interferometer with two circular entrance apertures can be expressed as a function of wavelength, telescope diameter D , and projected baseline B as follows.

$$T(\theta, \phi) = 2 \times (J_1(\pi\theta D/\lambda)/(\pi\theta D/\lambda))^2 \times \sin^2(\pi\theta \cos(\phi)B/\lambda) \quad (1)$$

θ, ϕ are respectively the angular distance to the boresight and the azimuth angle in the plan of the sky with respect to the projected baseline. Eq.(1) assumes a diffraction limited operation without any residual wavefront error, with a perfect π phase shift between the two arms of the interferometer and equal amplitudes of the recombining fields. In practice, the central null of the transmission map will be degraded by amplitude and optical path differences (OPD) between the two arms of the interferometer that are not perfectly corrected by the amplitude and OPD control servo-loops. Also, wavefront distortions induced by atmospheric turbulence will only be partially compensated by the adaptive optics. Spatial filtering of the high frequencies wavefronts errors

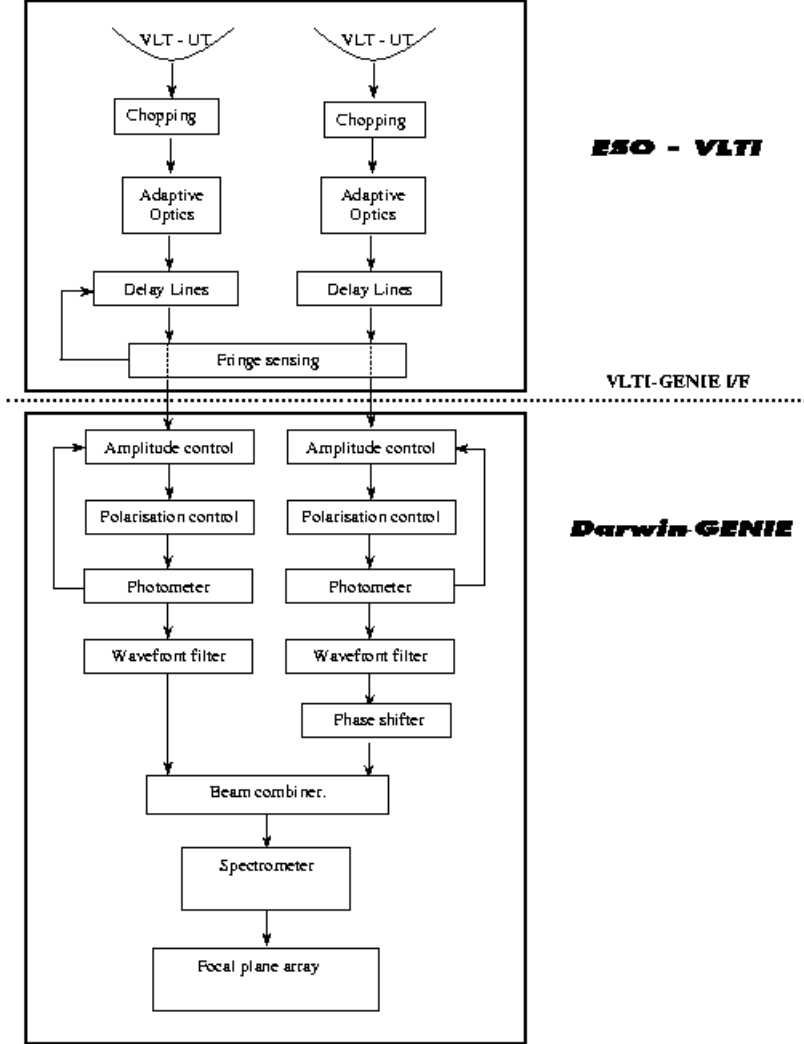


Figure 4. Functional description of GENIE

by monomode optical fibres will be required (Ollivier & Mariotti 1997). The coupling efficiency in the fibre will be variable (Shaklan & Roddier 1988) depending on the fluctuating wavefront and pointing errors. Hence, the envelope of the transmission map of the interferometer will significantly depart from a Bessel function and will be highly time variable.

In the Gaussian approximation, the optimum injection efficiency into a fibre is found for an f/D ratio such that (Ruilier 1998) the diffraction limited image has approximately the size of the core. The geometrical extent of the beam seen by the fibre is then $S\Omega \approx \lambda^2$. While the IR thermal background contribution is proportional to $S\Omega$, the signal of the exozodiacal dust cloud included in the field-of-view of the interferometer is proportional to the collecting surface. Hence, the ratio signal to noise of an exozodiacal dust cloud observed in the mid-IR by a Bracewell interferometer is proportional to its collecting area. The largest telescopes shall be used specially when operating in a spectral band where the background is very high.

Spectral band	K	L'	M	N
Exo-zodiacal flux (Jy)	0.2×10^{-3}	0.5×10^{-3}	0.7×10^{-3}	1.1×10^{-3}
Corresponding magnitude	16.2	14.2	13.4	11.3
Star/cloud contrast	1.5×10^5	3×10^4	1.4×10^4	2.5×10^3

Table 1. Exozodiacal flux, star/cloud brightness contrast of an exo- zodiacal cloud 10 times denser the solar zodiacal dust and located around a G2 V star at 10 pc.

The output signal of a Bracewell interferometer pointing to a star surrounded by a dust cloud can be expressed as follows..

$$S(\theta, \phi) = A_{\text{eff}} \times \int_{\theta} \int_{\phi} T(\theta, \phi) \times (O_s(\theta, \phi) + O_z(\theta, \phi)) \times d\theta \times d\phi + \text{Background} \quad (2)$$

$T(\theta, \phi)$ is the transmission map of the interferometer degraded by residual amplitude fluctuations and optical path differences between the two interferometer arms. $O_s(\theta, \phi)$ and $O_z(\theta, \phi)$ are the brightness of the star and of the exozodiacal dust disk respectively. *Background* is the incoherent background signal which includes the thermal emission from the sky and from the telescope and instrument optics. Since the only reliable observations on zodiacal dust have been carried out in the solar system, spectral properties of the exozodiacal dust emission can only be extrapolated from observations of the solar interplanetary dust cloud performed by the Diffuse Infra-Red Background Experiment (DIRBE) on board the COBE satellite. The most comprehensive model is due to Kelsall et al. (1998). It has been implemented in an IDL package called ZODIPIC (Küchner & Serabyn 2002). In this model, the dust density $n(r, z)$ is presumed to be in a form that is separable into a radial power law term and a vertical decreasing exponential term, i.e $n(r, z) = n_0 \times r^{-\alpha} \times f(z/r)$. The parameters are fitted to the DIRBE observations and a multiplicative factor n_0 is used to parametrized the large range of dust densities that can be expected in exozodiacal dust clouds. A disk inner cut-off is assumed to account for the sublimation of dust grain close to the star at temperatures higher than about 1500 K. Since the contribution of the scattered stellar light is negligible in the infrared, the brightness of the cloud is expressed as an integral along the line of sight of the dust thermal emission.

$$O_{z,\lambda} = \int (1 - A) \times E_{\lambda} \times B_{\lambda}(T) \times K_{\lambda}(T) \times ds \quad (3)$$

A is the albedo, E_{λ} an emissivity modification factor that measures deviations from the blackbody thermal radiance $B_{\lambda}(T)$, and $K_{\lambda}(T)$ the DIRBE color-correction factor. The temperature T of the dust is a decreasing function (taken as $T(r) = 286 \times r^{-0.467}$) of the distance r to the star. For baselines significantly greater than the diameters of the individual telescopes, Eq.(1) indicates that the first maximum of the transmission map is located approximately at $\theta = \lambda/(2 \times B)$. Due to Earth rotation, the projected baseline B on the plane of the sky will rotate and vary in apparent length and orientation with a period of one day. However, the hot inner dust of nearby solar-like zodiacal clouds, which has a high density, will most contribute to the overall signal registered by a 50 m baseline interferometer. Hence, flux considerations alone indicate that both the L' band at $3.8 \mu m$ and the N band around $10.2 \mu m$ could be appropriate for the detection of exozodiacal dust clouds around nearby stars with two ESO VLT telescopes operating as a Bracewell interferometer. In principle, the M band could also be considered but can be highly affected by the presence of varying amounts of water vapour in the atmosphere. Table 1 shows the flux of an exozodiacal dust cloud 10 times denser than the solar zodiacal dust around a G2 V star at 10 pc. The contrast between the star and the dust cloud brightness is also given for the different atmospheric bands. The N band present a significant advantage over the L' band since the contrast between the star and the dust cloud is lower by a factor of 10. Exo-zodiacal dust cloud detection can be achieved with a nulling rejection of a few 1000 in the N band (compare to a few 10^4 in the L' band). Since in addition the wavelength is longer, requirements on the control accuracy of the optical path difference are much less severe in the N band.

4.2. Stellar leakage and thermal background issues

The transmission map of a Bracewell interferometer exhibits a narrow null with a θ^2 transmission on axis. Eq. 2 indicates that the high spatial resolution of a two telescopes interferometer with a ≈ 50 m baseline does not completely reject the starlight on axis specially when stars are closer than 50 pc. A residual stellar signal S_{leak} leaks through the transmission map. It can be expressed as a function of the operating wavelength λ , interferometer baseline B and angular radius θ_s of the star.

$$S_{\text{leak}} = A_{\text{eff}} \times \int_{\theta} \int_{\phi} T(\theta, \phi) \times O_s(\theta, \phi) \times d\theta \times d\phi \approx (A_{\text{eff}} \times O_s) \times (\pi^2/8) \times (\theta_s B/\lambda)^2 \quad (4)$$

Assuming that the average stellar leakage can be removed by calibration, the major effect of the stellar leakage is to induce important noise contributions. One contribution is the photon noise of the mean stellar leak $\langle S_{\text{leak}} \rangle$. A second source of noise is the erratic fluctuation σ_{leak} of the stellar leakage due to residual variations at high frequencies of the amplitude and optical path difference between the two arms of the interferometer. Nulling interferometers using three or four ESO VLT telescopes could provide theoretically a broader null and could be therefore less sensitive to stellar leakage. However, such configurations with three or four VLTs would be non-linear. The Earth rotation would induce a non-homothetic deformation of the projected bidimensional array on the plane of the sky, so that amplitude variations would be needed to compensate the array deformation during the night and to maintain a broad θ^4 null. Additional engineering complexity would come from the increased number of fringe sensors and OPD control units. Furthermore, the stellar light leakage through groundbased nulling interferometer using more than two telescopes would be in practice much larger than their theoretical transmission due to their high sensitivity to residual OPD and Strehl amplitude fluctuations (Absil 2002).

$$S/N = S_z \sqrt{\Delta\lambda\Delta t} / \sqrt{\text{Background} + S_z + \langle S_{\text{leak}} \rangle + \sigma_{\text{leak}}^2} \quad (5)$$

Photon noise and fluctuations of the stellar leakage are major limitations for the detection of exozodiacal dust clouds using a groundbased nulling interferometer. Eq.(4) shows that the stellar leakage of a Bracewell interferometer and therefore its contributions to the noise can be reduced by operating at long wavelength with short baselines. Hence, the detection of exozodiacal dust clouds at VLTI would be most efficient with a Bracewell interferometer operating in the N band and combining two large 8.2 m UT telescopes with the shortest VLTI baselines (e.g 46 or 56 meters). Assuming a 20 nm rms OPD control accuracy, we estimate that an exozodiacal dust disk fifteen times brighter than the solar zodiacal cloud can be detected around a G2 V star at 10 pc within 1000 s. This detection performance is limited by the IR thermal background noise which is particularly important in the N band.

In addition to the photon shot noise, the background contributes to the noise by its temporal fluctuations. In the above estimate, we assumed that chopping is efficient enough to remove background fluctuations. In practice, little is known about the stability of the background in the mid-IR both on long and short time scales. For background subtraction, GENIE could benefit from the VLT chopping sub-system where the target and background are alternatively observed by tilting the VLT secondary mirrors. Since the background is not expected to be spatially uniform, the nodding technique could be applied. The main drawback of this chopping method is that the tip-tilt unit, the adaptive optics and the fringe sensor cannot remain in closed loops since they do not see the central guide star when measuring the background. All these subsystems have to reclose their loops before each single interferometric measurement is made. The overall detection performance of GENIE will thus depend on the efficiency of these subsystems which are expected to close their loops in a few hundred milliseconds, while a chopping period is expected to last typically for 100 msec. Alternative methods could improve this chopping efficiency. These include counter chopping of a control beam operating in a separate H or K band or a dual feed interferometer where one of the beam remains on the guide star to feed the subsystems. A third possibility is to use an internal chopping method similar to the one proposed by Küchner and Serabyn (2002) in the context of the Keck nuller. In this method, the exit pupils of each of two telescopes are divided in two parts. Each half-pupil of one telescope is recombined destructively with the corresponding half-pupil of

the other telescope, such that two Bracewell interferometers with parallel baselines are formed. Their nulled output are then combined with a $\pm\pi/2$ phase shift. Chopping can thus be carried out at high frequencies by alternately registering the signal from these two outputs. Based on IR thermal background measurement results, the definition study of GENIE will trade-off these different chopping methods and assess the feasibility of detecting exozodiacal dust clouds around nearby stars in the N band with a Bracewell interferometer. The study will establish the analysis methods of the interferometric data and the associated calibration modes of the instrument that are needed to retrieve the circumstellar signal from the residual starlight and to infer informations on the morphology of circumstellar clouds.

5. DARWIN-GENIE: DIRECT DETECTION OF EXO-PLANETS?

Since 1995, about 100 extrasolar planets have been discovered as companions to solar-type stars (Marcy, Cochran & Mayor 2000). All of these planets were discovered indirectly in high-precision Doppler surveys. These surveys measure the radial velocity Doppler shift of the parent star due its periodic motion around the center of mass of the star plus planet system. This technique is most sensitive to massive planets with short orbital periods. The extrasolar planets that have been discovered today have mass ranges from $M \times \sin i \approx 0.15$ to 10 Jupiter masses (where i is the orbit inclination onto the observer line of sight) with orbital periods ranging from 3 days to a few years. Because of their proximity to the parent star (<1 AU), the atmosphere of some of these planets is much hotter than that of Jupiter (and of the Earth), hence their name of hot Jupiters. With temperatures sometimes higher than 1000 K, their thermal emission is maximum in the infrared K and L bands. With baselines ranging from 46 to 130 meters, the VLTi is optimized for the detection in the L band of planets at about 5-15 milli-arcsec from their parent star which correspond to 0.05-0.15 AU for a nearby star at 10 parsecs. This is specially fortunate since these planets are precisely the hot Jupiters of which a significant sample is known. The contrast between a hot Jupiter and its parent star in the L band is reduced to less than 10^4 compared to the 10^6 in the N band for Earth-like planets.

As previously mentioned, the photon noise and the fluctuations of the stellar leakage induced by residual variations of the amplitude and optical path difference between the two arms of a Bracewell interferometer are major limitations to the detection of faint objects around nearby stars. Eq. 4 shows that the starlight leakage through a two telescope Bracewell interferometer increases as the square of the baseline and decreases as the square of the wavelength. Hence, the requirements on the OPD control accuracy are much more stringent in the L' band than in the N band to limit the noise contribution due to stellar leakage fluctuations. This is illustrated in Fig. 6 which shows the signal to noise ratio of a 850 K Jupiter detection around a G2 dwarf as a function of the star distance. Two 8.2 m telescopes are assumed to operate in a Bracewell configuration within the L band. A 0.5μ bandwidth and a 100 seconds integration time are assumed. The target distance, planet separation and baseline are assumed to be in the optimum condition where the hot Jupiter is located on the first maximum of the Bracewell transmission map. The influence of residual piston error (left curve) and of the amplitude matching error (right curve) are plotted as a function of the star distance assuming no other error contributor. For stars closer than 10 pc, the detection performance are limited by the performance of the OPD and amplitude control loops. The performance requirements of these subsystems for bright exo-Jupiter detection with a Bracewell interferometer consisting of two UTs operating either in the K or in the L band are summarized in Table 2. The requirement on the OPD control accuracy between the two arms of the interferometer are slightly relaxed in the L band compared with the K band. They are theoretically within the limitation imposed by the brightness of the reference central star for nearby objects. However, a second OPD control loop operating at high frequencies would be required which performance feasibility is to be demonstrated. As already mentioned, three or four telescope configurations can in principle achieve a broader null of the star signal. However, in practice, they do not offer performance improvements specially in the K or L bands since they are not robust to residual atmospheric OPD fluctuations.

In the L band, the starlight leakage is much higher than the hot-Jupiter signal around nearby stars. Hence, one additional difficulty is to calibrate this parasitic signal out. A double-Bracewell configuration (see Fig. 7) using internal modulation between two Bracewell nulling interferometers could subtract the IR background and the starlight leakage from the overall nulled signal with an accuracy sufficient to retrieve the signal from the brightest exo-Jupiters. The principle of this double Bracewell technique would be to recombine the nulled out put

Table 2. Performance requirement for bright exo-Jupiter detection of a Bracewell interferometer with two UTs operating either in the K or in the L band

Performance requirements	(unit)	K band	L band
Amplitude matching accuracy		$< 1\%$	$< 1\%$
OPD control accuracy	(nm)	$< 6nm$	$< 10nm$
Stellar leakage absolute calibration accuracy		$< 0.5\%$	$< 2.5\%$
Background subtraction accuracy		$< 5 \cdot 10^{-3}$	$< 5 \cdot 10^{-5}$

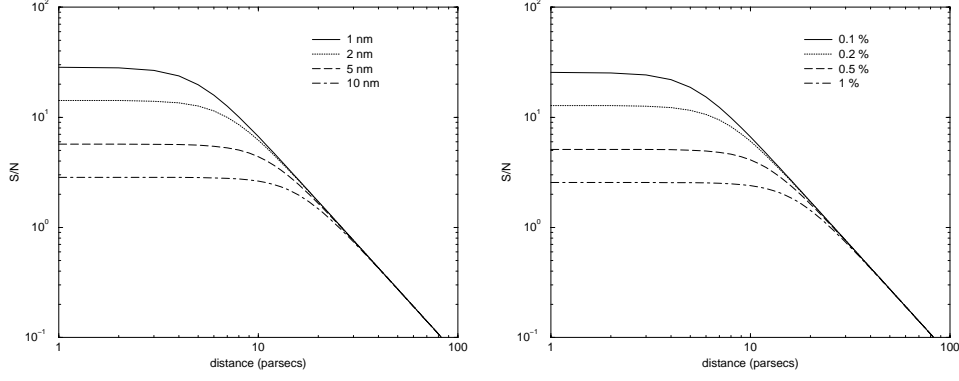


Figure 5. Signal to noise ratio of a 850 K Jupiter detection around a G2 dwarf as a function of the star distance. Two 8.2 m telescopes are assumed to operate in a Bracewell configuration within the L band. The target distance, planet separation and baseline are assumed to be in the optimum condition where the hot Jupiter is located on the first maximum of the Bracewell transmission map. The influence of residual piston error (left curve) and of the amplitude matching error (right curve) are plotted as a function of the star distance assuming no other error contributor.

of two Bracewell interferometers with a $\pm\pi/2$ phase shift so that new transmission maps are obtained which are asymmetric with respect to the center of the field of view. A maximum of transmission in one map corresponds to a minimum of transmission in the other map. Therefore, an extended source with central symmetry has the same contribution in both outputs. On the other hand, a hot Jupiter located on the maximum of transmission of one map would not give any signal through the other map. Thus, the Jupiter signal can be modulated and therefore retrieved by alternating the two outputs. Although possible in theory, direct detection of the hottest exoplanets on-ground using this nulling interferometry technique in the L' band would be even more demanding in term of OPD contro accuracy than a single Bracewell interferometer. It is however worth noting that three double-Bracewell configurations are possible at VLTI (see Fig. 8) which offer flexibility in adapting the transmission map to the orbital position of the exo-Jupiters around their parent star.

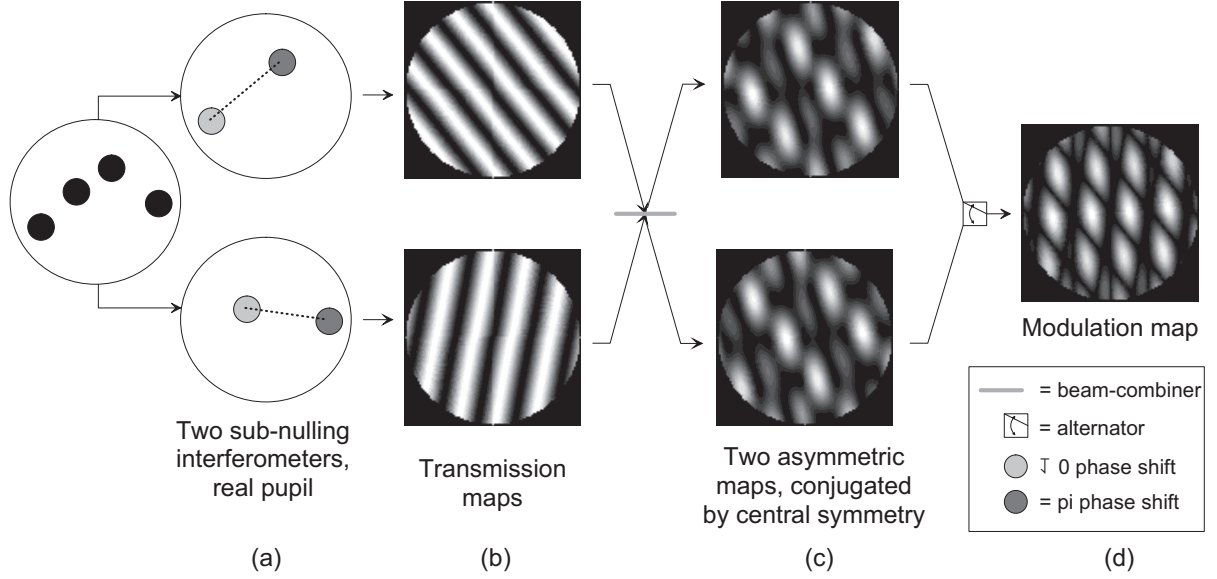


Figure 6. Principle of internal modulation between two Bracewell interferometers

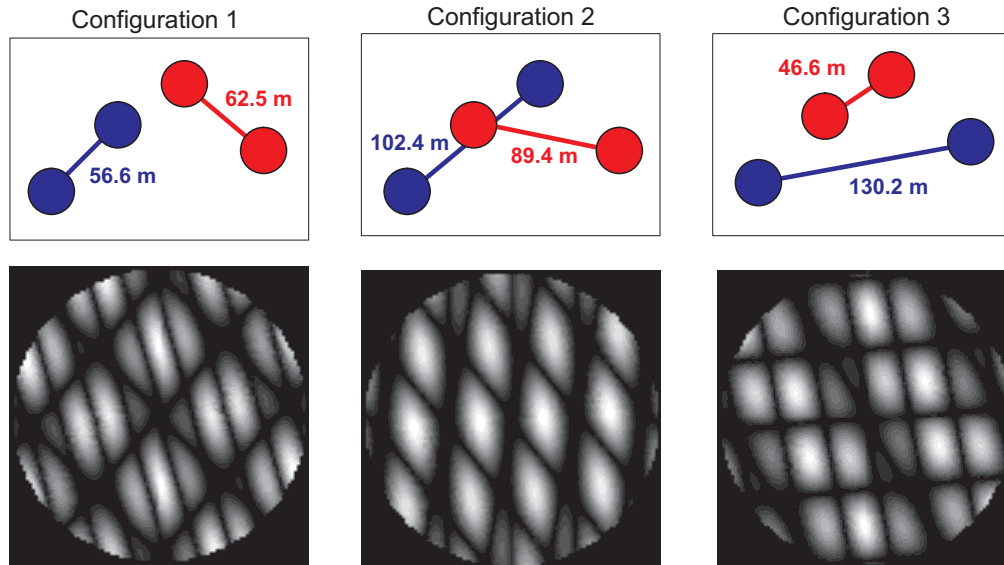


Figure 7. Possible double-Bracewell configurations and associated transmission maps using ESO UTs.

6. DARWIN-GENIE: A GENERAL USER INSTRUMENT

The nulling interferometry technique in the infrared is well suited to spectroscopic studies of any faint cool object located in the immediate environment of a bright astrophysical source (e.g. Voit 1997). A wide range of studies could potentially be conducted using the Darwin-GENIE experiment including infrared spectroscopy of cool dwarfs in spectroscopic binaries, of protoplanetary disks around T Tauri stars and Herbig Haro objects (Malbet & Bertout 1995). Such programs would be important scientific by-products of the Darwin-GENIE experiment.

7. SUMMARY

Darwin is one of the most challenging space projects ever considered by the European Space Agency (ESA). Its principal objectives are to detect Earth-like planets around nearby stars and to characterise their atmospheres. Within the frame of the Darwin program, the European Space Agency (ESA) and the European Southern Observatory (ESO) intend to build a ground-based technology demonstrator. This Groundbased European Nulling Interferometry Experiment (GENIE) shall operate in the central laboratory of the VLTI at Mount Paranal (Chile). The experiment will combine all optical functions foreseen in the future Darwin Infrared Space Interferometer. It will benefit from the existing VLTI infrastructure, including the telescopes with chopping and adaptive optics, the delay lines, the fringe sensors and the beam combiner laboratory. The GENIE optical bench within the VLTI laboratory will provide the functions specific to the nulling interferometry technique, namely amplitude and polarization matching, phase shifting, beam combination, spatial filtering, internal modulation, spectrometry, detection and cryogenics.

The prime objective of Darwin-GENIE is to gain experience on the design, manufacture and operation of a nulling interferometer. The ESO Very Large Telescope Interferometer offers a unique opportunity to fulfill this objective. Nulling tests with the highest rejection factor on single stars or close binaries in broad mid-IR spectral bands will achieve this objective with the limitations imposed by the turbulence and infrared background of the Earth atmosphere. Secondary objectives of Darwin-GENIE are to prepare the Darwin science program through a systematic survey of Darwin candidate targets, to perform Darwin related science achievable from ground and to provide the science community with a scientifically useful instrument. ESA and ESO will start an initial definition study to be conducted by European Industries and Scientific Institutes. The study will establish a preliminary design of the instrument including the specifications of its subsystems and a description of their implementation using technologies developed within the frame of the ESA Technology Research Program. Among the different solutions that will be investigated, a candidate design is a Bracewell interferometer operating in the N band and combining two large 8.2 m UT telescopes with the shortest baseline (e.g 46 or 56 meters) available at VLTI. Based on the results of the measurements of the IR thermal background, the definition study of GENIE will trade-off different chopping methods including classical chopping and nodding technique, counter chopping or internal modulation and assess the feasibility of detecting exozodiacal dust clouds around nearby stars with a Bracewell interferometer. Upon completion of the definition study, ESA and ESO will decide whether to proceed in the manufacturing and test of GENIE.

REFERENCES

1. Absil O, 2002. Genie: study of aperture configurations, technical report
2. Angel J.R., Cheng A.Y., Woolf N.J., 1986, *Nature* 322, 341
3. Backman D.E., Parece F., 1993, in *Protostar and Planet III*, ed. E.H. Levy & J.I. Lunine (Tucson, Univ. of Arizona Press), 1253
4. Bracewell R.N., 1978, *Nature* 274, 780
5. ESA, 2000. Darwin: the Infrared Space Interferometer: Concept and Feasibility Study Report ESA-SCI/2000/12
6. Fridlund M., 2000, in *Proceedings of the Conference 'Darwin and Astronomy - the Infrared Space Interferometer'*, Stockholm, Sweden, 17-19 November 1999, ESA SP-451
7. Fridlund M., 2002, in *Proceedings of the Conference 'Stellar Structure and Habitable Planet Finding'* Cordoba, 11-15 June 2001, ESA SP-485
8. Kelsall T., Weiland J., Franz B., et al. 1998, *ApJ* 508, 44
9. Küchner M. J., Brown M.E., 2000, *PASP* 112, 827
10. Küchner M. J., Serabyn E. 2002, *ApJ* submitted
11. Malbet F., Bertout C., 1995, *A&AS*, 113, 369
12. Marcy G.W., Cochran W.D., Mayor M., 2000, in *Protostar and Planet IV*, ed. V. Mannings, A.P. Boss & S.S. Russel (Tucson, Univ. of Arizona Press), 1285
13. Ollivier M., Mariotti J.M., 1997, *App. Opt.* 36 5340
14. Ruilier C., 1998, *SPIE* 3350, 319
15. Shaklan S., Roddier F., 1988, *App. Opt.* 27, 2334
16. Voit M. G., 1997, *ApJ* 487, L109