

Parallel Finite Element Assembly of High Order Whitney Forms

Nicolas Marsic¹ and Christophe Geuzaine¹

¹ *Department of Electrical Engineering and Computer Science, University of Liège*
e-mails: nicolas.marsic@ulg.ac.be, cgeuzaine@ulg.ac.be

Abstract

This paper presents an efficient method for the finite element assembly of high order Whitney elements. We start by highlighting the most time consuming parts of the classical assembly technique. This approach can be reformulated into a computationally efficient matrix-matrix product. We conclude by presenting numerical results.

Key words: finite element, high order, high performance computing, Whitney elements

1 Introduction

There is a growing consensus that state of the art finite element (FE) technology requires, and will continue to require, too extensive computational resources to provide the necessary resolution for complex high-frequency electromagnetic compatibility simulations, even at the rate of computational power increase. This leads us to consider methods with a higher order of grid convergence than the classical second order.

2 Classic finite element assembly

By applying the classical Galerkin FE scheme with a curl-conforming basis, the solution of the time harmonic propagation of an electrical wave is computed using elementary integrals $\mathcal{T}_{i,j}^e$, as developed in [?]. Each $\mathcal{T}_{i,j}^e$ is giving the contribution of the degrees of freedom (DOF) i and j of the mesh element e .

The classical FE assembly algorithm computes the $\mathcal{T}_{i,j}^e$ terms for every pair of DOF i and j on every element e of the mesh. It is worth noticing that increasing the basis order will have two impacts on the computation time: each element will have more DOFs and the numerical quadrature will require more points. These two phenomena will substantially increase the assembly time, as shown in Figure ??.

3 Efficient assembly

The key idea of a fast assembly procedure is to compute all the $\mathcal{T}_{i,j}^e$ terms using matrix-matrix products, as proposed by [?, ?] for standard nodal Lagrange finite elements. Indeed, this operation has an excellent cache reuse and highly optimized implementations can be found.

The $\mathcal{T}_{i,j}^e$ terms can be computed by the product of two matrices. The first matrix will be composed of the Jacobian matrices and non linear terms. The second matrix will be composed only of the basis functions defined over the reference element.

It is worth noticing that depending on the mesh elements orientation, the curl-conforming basis functions cannot simply be reordered, as for classical H^1 Lagrange bases. This situation may be overcome by considering more than one reference element, as proposed by [?].

4 Numerical results

Figure ?? presents the assembly times of the classical and efficient assembly procedures for an increasing basis order. The FE matrix is assembled for a propagation problem into a wave guide, meshed with 8579 curved tetrahedra. The tests were done on a Intel Core i7 960 and by using the OpenBLAS implementation of the matrix-matrix product with 4 threads. It is worth mentioning that the classical implementation also uses 4 threads for the assembly.

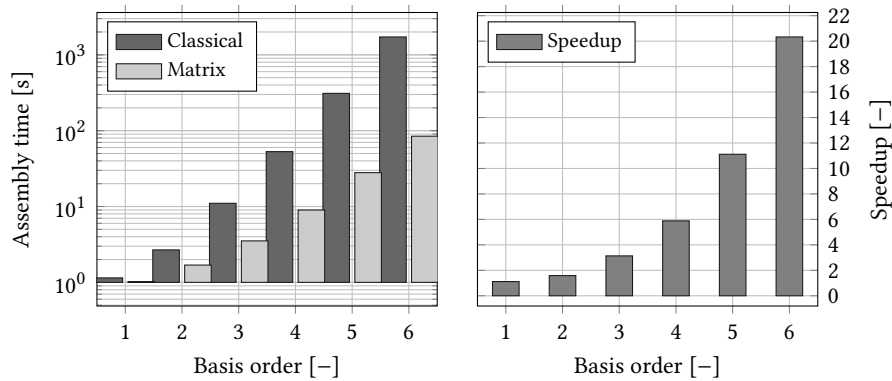


Figure 1: Assembly time and speedup for the classical and fast procedures

It can be seen from Figure ?? that the matrix procedure is much faster than the classical one for high order interpolations. For instance, the speedup on an order 6 problem, with more than 900.000 unknowns, is around 20.

Acknowledgments

This work was supported in part by the Belgian Science Policy Office under grant IAP P7/02 and the Walloon Region under grant WIST3 DOMEX. N. Marsic is a fellowship beneficiary with the Belgian Research Training Fund for Industry and Agriculture (FRIA).

References

- [1] M. AINSWORTH, J. COYLE, *Hierarchical finite element bases on unstructured tetrahedral meshes*, Int. J. Numer. Meth. Engng., **58** (2003) 2103–2130.
- [2] A. BOSSAVIT, *Computational electromagnetism*, Academic Press, 1998.
- [3] K. HILLEWAERT, *Exploiting data locality in the DGM discretisation for optimal efficiency*, Notes on numerical fluid mechanics and multidisciplinary design **113** (2010) 11–23.
- [4] J. LAMBRECHTS, *Finite element methods for coastal flows: application to the great barrier reef*, PhD thesis, Université catholique de Louvain, 2011.