Integrated continuous flow photoreactors: Photooxidation of (L)-methionine with singlet oxygen

Noémie Emmanuel [1], C. Mendoza [2], M. Lismont [3], L. Dreesen [3], B. Heinrichs [2], J-C. M. Monbaliu* [1]

[1]Center for Integrated Technology and Organic Synthesis, Department of Chemistry/ [2]Nanomaterials, Catalysis, Electrochemistry, Department of Chemical Engineering / [3]Biophotonics, Department of Physics
University of Liège, B-4000 Liège (Sart-Tilman), Belgium, (N.Emmanuel@ulg.ac.be)

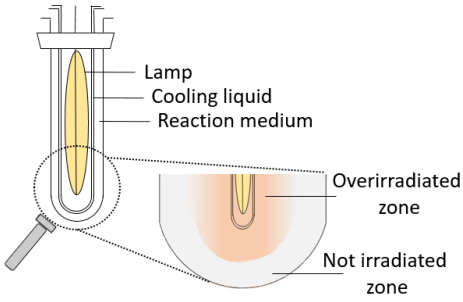

Figure 1 :
Usual immersion well with a lack of homogeneous irradiation

1 | INTRODUCTION

Development of photochemistry in macroscopic **batch** reaction vessels is hampered due to inherent limitations: **superficial light penetration** and **poor heat exchange** result in inhomogeneous irradiation and hence to side-reactions or product degradation due to **overexposure**. The recent implementation of photochemical processes in **microreactors** under continuous-flow conditions appeared to be **much more powerful** than its batch analogue in terms of **irradiation efficiency**, light penetration and **excellent heat exchange**. Furthermore, the fine control of residence time ensures an accurate control of the irradiation time, avoiding side-reactions and degradation.

2 | Aim

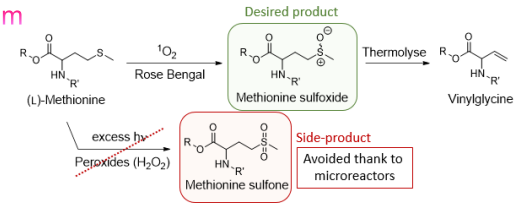

The aim was to **implement the photooxidation of (L)-methionine with singlet oxygen in microreactor** under continuous-flow conditions to avoid the formation of undesired side-product and improve the efficiency of the reaction.

3 | Photooxidation in batch immersion well

Methionine + Rose Bengal in water with O_2 or Air bubbling

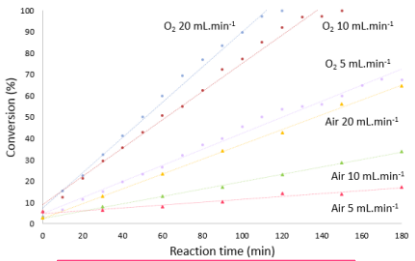

✓ ↗ [Rose Bengal]
↗ lamp intensity
✓ O_2 rather than air
Total conversion in 2 h

5 | Microreactor

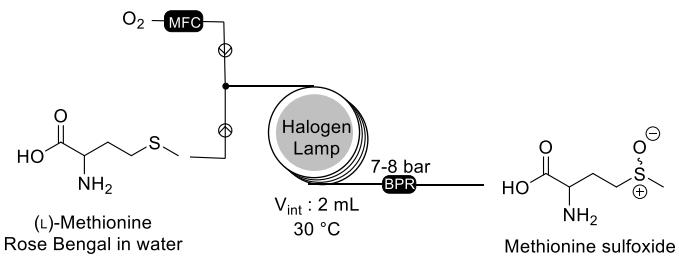



PFA tubing : easily exchangeable

Halogen lamp surrounded by cooling liquid

✓ Segmented flow
✓ O_2 excess

Total conversion in <1 min

4 | ^{1}H NMR

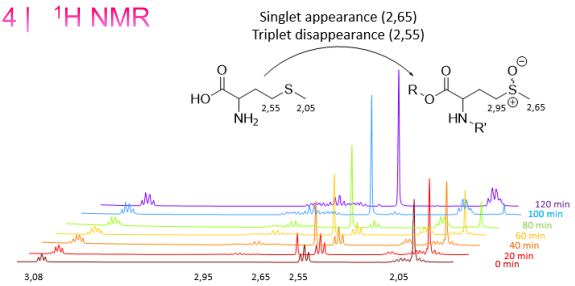

6 | Results

Flow rates (mL.min^{-1})		Back Pressure Regulator (Bar)	Temperature (°C)	Residence Time (min)	Conversion
Substrat solution	O_2				
0.5	15	7	30	<1	Total

Total conversion of (L)-methionine into methionine sulfoxide could be reached in only 1 **min**.
(Shorter residence times or lower O_2 flow rates were not sufficient and could not lead to total conversion)

7 | Conclusion

The photooxidation of (L)-methionine with singlet oxygen using Rose Bengal as a sensitizer was successfully implemented in a microreactor setup and led to total and selective conversion into methionine sulfoxide, an important building block for the organic synthesis of peptides or functionalized amino acid. The reaction was performed **in 1 min** while the same reaction in batch took 2h.

8 | Acknowledgements

This research was supported by the French Community (Belgium) and the Joint Research Actions (ARC 15/19-05 icFlow)