

Development of a new Li-Gel Polymer Electrolyte thin flexible battery design operating at room temperature

H. Porthault^{a,*}, C. Calberg^b, J. Amiran^a, S. Martin^a, C. Páez^b, N. Job^b, B. Heinrichs^b, D.

Liquet^c, R. Salot^a

^a Univ. Grenoble Alpes, CEA, LETI, MINATEC Campus, 38054 Grenoble, France

^b Univ. Liège, Department of Chemical Engineering - Nanomaterials, Catalysis, Electrochemistry,
B6a Quartier Agora, 13 Allée du VI Aout, 4000, Liège, Belgium

^c Prayon S.A., 144 rue J Wauters, 4480, Engis, Belgium

*corresponding author: H. Porthault

Supplementary file

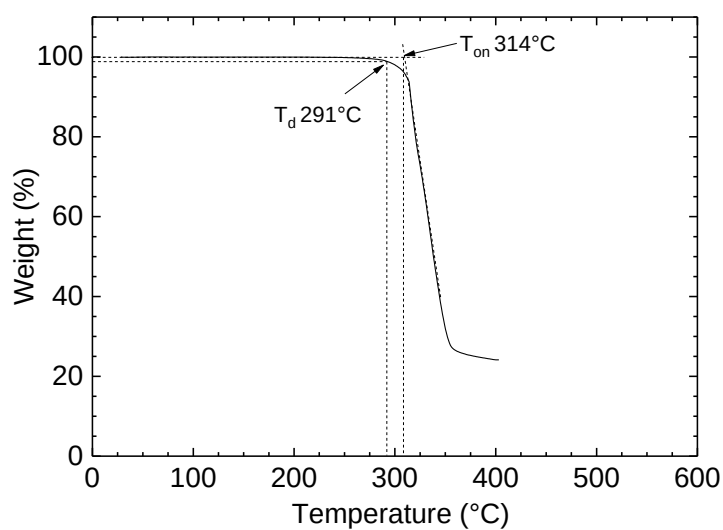


Figure S1: Example of T_d and T_{on} graphical determination on a Pyr₁₃FSI thermogram.

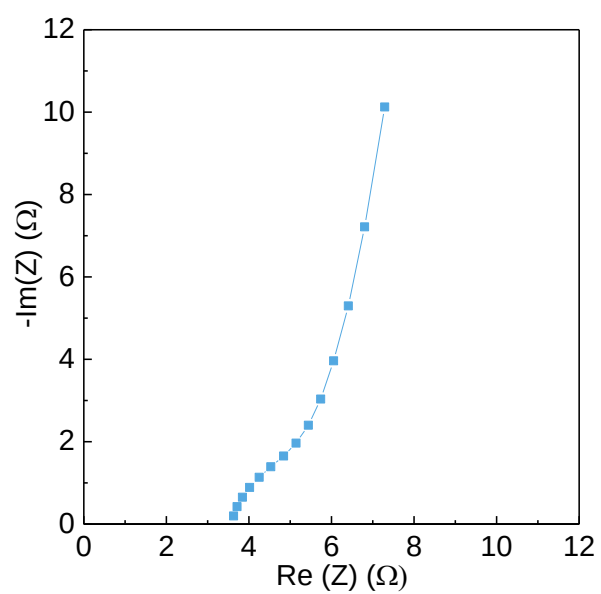


Figure S2: Example of an electrochemical impedance spectrum of a $\text{LiCoO}_2/\text{GPE}/\text{Cu}$ configuration ("Li-free") at open circuit voltage just after the assembly.