

# The Street Walkability and Thermal Comfort Index (SWTCI): A new assessment tool combining street design measurements and thermal comfort

Kahina Labdaoui<sup>\*a, b</sup>, Said Mazouz<sup>d</sup>, Mehdi Moeinaddini<sup>c</sup>, Mario Cools<sup>b, e, f</sup>, Jacques Teller<sup>b</sup>

DOI: [10.1016/j.scitotenv.2021.148663](https://doi.org/10.1016/j.scitotenv.2021.148663)

## Abstract

In recent years, walkability is increasingly integrated into sustainability strategies, considering its many health and environmental benefits. Besides, thermal comfort also has been progressively promoted as a critical measure for pedestrian comfort and wellbeing. Despite the relevance of the two concepts, few studies combined them in a comprehensive model. This study considers thermal comfort in assessing walkability by developing a new measurement tool, the Street Walkability and Thermal Comfort index (SWTCI), which focuses on comfort facilities and Physiological Equivalent Temperature (PET), at the street scale. The applied point system method requires combining a questionnaire survey, observations, and in situ measurements (air temperature, wind velocity, and relative humidity). The questionnaire survey (330 responders) measured 21 street design indicators' importance, using a five-point Likert scale ranging from 1 (least important) to 5 (very important). The observation technique seeks to evaluate every pedestrian comfort indicator score ( $S_{i_s}$ ). The in situ measurements permit Envi-met's calibrated data validation and getting the mean radiant temperature ( $T_{mrt}$ ). Those were considered in the PET's calculation using Rayman software. Three distinct streets have been chosen in Annaba city, Algeria, within the Mediterranean climate (Csa). The results show that the SWTCI achieves its highest score on the three streets when the thermal perception is neutral ( $20 < PET < 26$ ), and its lowest score, with a warm thermal sensation ( $28 < PET < 31$ ). Despite the divergence in PET values, the highest score of SWTCI was 33%, reflecting a low comfort quality and minimal pedestrian facilities. Applying the SWTCI method can transform uncomfortable streets into an ideal walkable and pleasant path by finding the problems and proposing improvements.

**Keywords:** Mediterranean climate (Csa), Street level, Street Walkability Thermal Comfort index (SWTCI), Thermal comfort, the Physiological Equivalent Temperature (PET), Walkability.

## 1. Introduction

Walking is considered the primary transport mode for people (Asadi-Shekari et al., 2019). It is also crucial in promoting a healthier and sustainable environment by reducing traffic congestion, obesity rate and improving liveability (Moura et al., 2017). The urban environment components (e.g., streets, parks, squares) have a critical role in enhancing the walking experience (Ruiz-Padillo et al., 2018). Various studies focused on evaluating walkability at the street level (Aghaabbasi et al., 2019, 2017; Asadi-Shekari et al., 2015) since it is the main pedestrian activity space. The street design and facilities can encourage and discourage walking. For example, urban design features such as shade trees and benches offer a pleasant walking experience (Battista and Manaugh, 2018). Drinking fountains, lighting, benches and seating area, and landscape and trees (Asadi-Shekari et al., 2013a, 2014) provide usability, safety, and attractiveness for pedestrians (Aghaabbasi et al., 2019).

According to Asadi-Shekari et al. (2019), walking rates depend on pedestrian facilities (Rodríguez et al., 2008). Designing a comfortable pedestrian environment could be achieved by operational assessment tools that involved sustained measurement and analysis of the sidewalk facilities and thermal comfort. Many studies explored walkability assessment tools at the street scale. The Level of Service (LOS) is a measurement tool for evaluating the quality of service, street facilities, and infrastructure (Asadi-Shekari et al., 2014, 2019; Moeinaddini et al., 2013). Sarkar (1993) proposed a (LOS) for the pedestrian. Based on factors that affect safety, security, comfort, system coherence, and attractiveness (Nilles and Kaparias, 2018). However, the LOS models have not included many comfort facilities besides pedestrian's characteristics such as age categories and abilities.

The pedestrian level of service (PLOS) is an essential tool for promoting existing infrastructure, managing new investments, and guiding appropriate contributions

54 (Christopoulou and Pitsiava-Latinopoulou, 2012). By identifying the deficiency in the  
55 pedestrian street environment and suggesting upgrading for solving the problems. Various  
56 studies proved the PLOS usefulness in assessing street facilities by considering attractiveness,  
57 safety, and convenience design factors, such as slope, sidewalk width, material, and surface  
58 condition (Asadi-Shekari et al., 2013a, 2014; Christopoulou and Pitsiava-Latinopoulou, 2012;  
59 Kang et al., 2013). However, despite the relevance of these assessment tools, they didn't  
60 consider thermal comfort in the walkability assessment. Thus, adding thermal comfort makes  
61 up an essential factor to be included in the PLOS.

62 From another perspective, an increasing number of studies focused on improving  
63 thermal comfort in outdoor urban spaces to enhance citizens' health, wellbeing and to  
64 promote outdoor activities (e.g., walkability, cycling). Moreover, thermal comfort defines the  
65 users' satisfaction level regarding the thermal environment (ASHRAE Standard, 2004;  
66 Potchter et al., 2018), based on the neutral temperature (Elnabawi et al., 2016).

67 Thermal comfort assessment requires combining meteorological variables with  
68 thermo-physiological parameters (Mayer, 1993; VDI, 1998). According to Potchter et  
69 al.(2018), the Physiological Equivalent Temperature (PET) (Matzarakis et al., 1999; Mayer  
70 and Höppe,1987) and the Universal Thermal Climate Index (UTCI) (Jendritzky, G et al.,  
71 2012) are the most used indexes for the assessment of outdoor thermal environments. PET  
72 had been applied and validated in several climates zones (Gulyás et al., 2006; Johansson et al.,  
73 2014; Matzarakis et al., 1999; Thorsson et al., 2007) as well as different outdoors  
74 environments (Ali-Toudert and Mayer, 2007; Andrade et al., 2011; Charalampopoulos et al.,  
75 2013; Knez and Thorsson, 2006; Lai et al., 2014; Lin et al., 2013; Lin and Matzarakis, 2008;  
76 Matzarakis et al., 2007; Thorsson et al., 2007). Many studies applied a numerical simulation  
77 model of the climatic variable at the street level (Acero and Herranz-Pascual, 2015; Klemm et  
78 al., 2015; Lee et al., 2016; Morakinyo et al., 2017) using software to optimize thermal comfort


79 index accuracy. For example, ENVI-met and Rayman are well-known software used to  
80 calculate outdoor thermal comfort. Envi-met simulation allows predicting the mean radiant  
81 temperature ( $T_{mrt}$ ), relative humidity, air temperature, wind speed and surface temperature  
82 (Acero and Herranz-Pascual, 2015). These four microclimatic variables are essential to  
83 calculate outdoor thermal comfort, besides metabolic rate and clothing insulation (Watanabe  
84 et al., 2014). Thus, different scholars Cohen et al. (2013); Elnabawi et al. (2016); Kántor et  
85 al.(2012); Lai et al.(2014); Tseliou et al. (2010) combined simulation and field surveys in  
86 outdoor environments. To provide an extensive perspective concerning the impact of micro  
87 climate on outdoor thermal comfort and urban space use.

88         Based on the current literature, the thermal conditions of the walking environment  
89 have been under-investigated, despite the importance of the outdoor thermal environment for  
90 pedestrians. Indeed, thermal stress could debase the walking experience and indirectly hinder  
91 walkability and PLOS. Only a few recent studies associated walkability and thermal comfort.  
92 Lee et al. (2020) explored the influence of biometeorological related factors on pedestrian  
93 behavior by calculating PET and UTCI to express thermal stress in Hong Kong, China. The  
94 findings highlighted the correlation between thermal sensation and pedestrian choice of the  
95 shaded zone. However, the selected comfort indices have not been included in the walkability  
96 assessment. Labdaoui et al. (2021) developed a measurement tool by considering PET as a  
97 walkability indicator in the Csa climate. However, despite considering climatic variables such  
98 as air temperature, wind velocity, and relative humidity, the  $T_{mrt}$  was not included in the PET  
99 assessment. This paper fills this knowledge research gap by proposing the Street Walkability  
100 and Thermal Comfort Street Index (SWTCI). This innovative method is based on PLOS  
101 system that combines thermal comfort and walkability at the street scale.

102

103 **2. Method**

104 The current study aims to measure walkability at the street level by considering  
 105 pedestrian comfort-related facilities and thermal comfort. For this purpose, we developed a  
 106 new assessment tool, the Street Walkability and Thermal Comfort Index (SWTCI). The  
 107 presented method comprises some main steps that are summarised in Fig 1. The first one is  
 108 reviewing effective indicators to identify pedestrian facilities and thermal comfort variables in  
 109 research papers and standard guidelines, using Google Scholar, the Web of Science.  
 110 Keywords included walkability, thermal comfort, street, Envi-met, simulation, assessment  
 111 tools, street's furniture policy, and Csa. This research was conducted between 2002 and 2019  
 112 to select all the indicators that improve the walking experience. The finding emphasizes the  
 113 lack of consideration for thermal comfort in the walkability assessment at the street scale. The  
 114 microclimatic variables are also missing in the evaluation of walkability comfort.

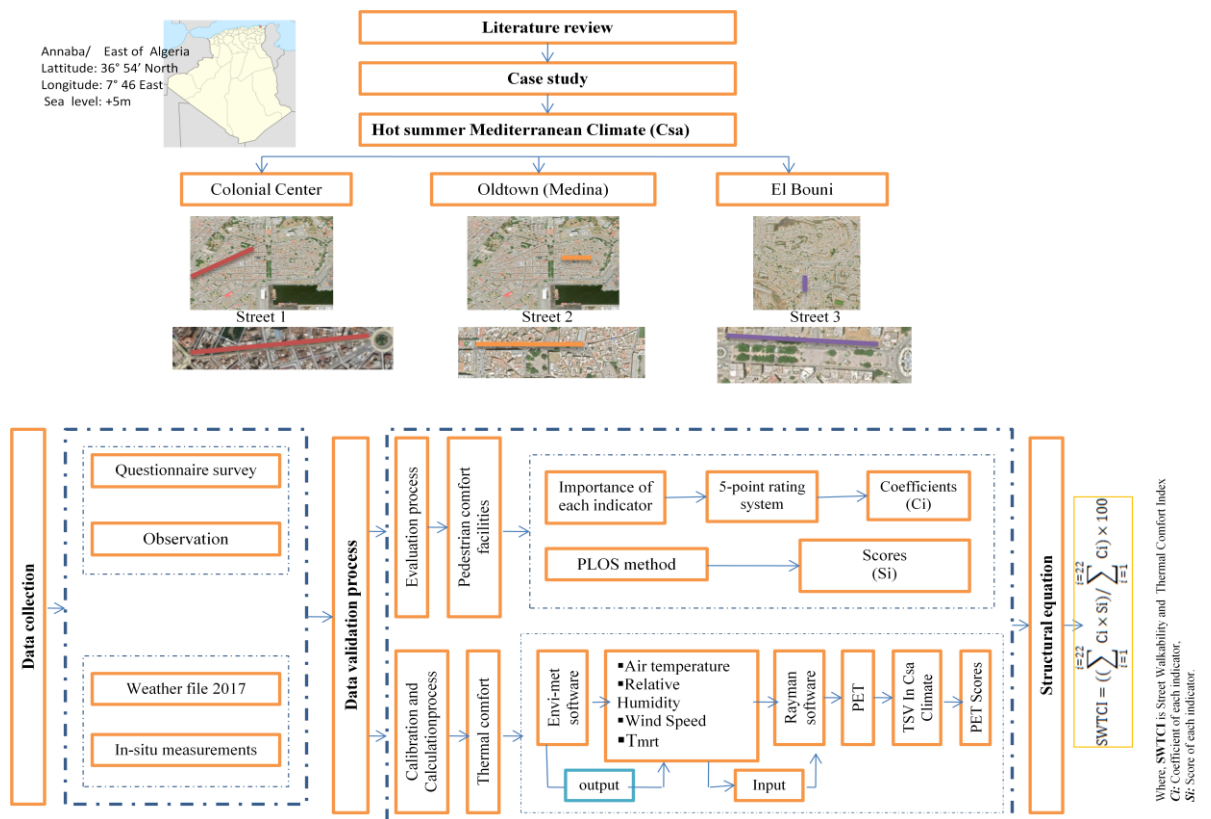

115  
 116 **Fig.1.**Conceptual framework of the STWCI

117 The proposed SWTCI tool is based on compiling 21 pedestrian comfort facilities  
 118 extracted from the current literature (**Table 1**). That includes a wide range of sidewalk-related  
 119 factors and facilities, considering people with different needs and abilities.

120 **Table 1** Pedestrian comfort facilities on street level

<b>Pedestrian comfort facilities</b>	<b>References</b>
Slower traffic speed	Asadi-Shekari et al. 2015, 2014; Lee and Kim, 2019; Retting et al. 2003)
Buffer and barriers (curb and furnishing zone)	Asadi-Shekari et al. 2015; Jaskiewicz 2000; Labdaoui et al. 2021
Fewer traffic lanes,	Asadi-Shekari et al., 2015, 2014; Labdaoui et al. 2021
Mid-block crossing	Diogenes and Lindau, 2010; King et al. 2009
Landscape and tree	Aghaabbasi et al. 2019; Labdaoui et al. 2021; Lee et al. 2016; Todorova et al. 2004
Furniture (trash receptacles)	Aghaabbasi et al. 2019, 2017; Asadi-Shekari et al. 2019, 2014; Labdaoui et al. 2021
Footpath pavement	Kelly et al. 2011; Moura et al. 2017; Nilles and Kaparias, 2018
Marking (crosswalk)	Kelly et al. 2011; Labdaoui et al. 2021; Moura et al. 2017; Ruiz-Padillo et al. 2018
Sidewalk on bothsides	Asadi-Shekari et al. 2015; Cain et al. 2014; Labdaoui et al. 2021
Width of footpath	Landis et al. 2001; Nilles and Kaparias, 2018
Slope	Asadi-Shekari et al. 2014; Kim et al. 2014; Koh and Wong, 2013; Labdaoui et al. 2021
Lighting	Asadi-Shekari et al. 2019; Crews and Zavotka, 2006; Nilles and Kaparias, 2018
Ramp	Aghaabbasi et al. 2019; Christopoulou and Pitsiava-Latinopoulou, 2012
Park and space for playing	Gehl et al. 2006; Labdaoui et al. 2021; Lamour et al. 2019
Social space (café)	Gunn et al. 2017; Koh and Wong, 2013; Labdaoui et al. 2021; Moura et al. 2017
Shade	Clifton et al., 2007; Jaskiewicz, 2000; Taleai and Taheri Amiri, 2017
Bench and seating area	Asadi-Shekari et al. 2019; Galanis and Eliou, 2011; Kihl et al. 2005; Troped et al., 2006
Toilet	Aghaabbasi et al. 2018; Asadi-Shekari et al. 2019; Labdaoui et al. 2021
Pedestrian signal	Aghaabbasi et al. 2018; Asadi-Shekari et al. 2014; Boisseau, 1999
Shorter crossing distance (curb extension)	Asadi-Shekari et al. 2015; Johnson, 2005; Labdaoui et al. 2021

121

122 The second step included the online survey conducted between June and August 2019  
 123 via Survey Monkey and Google Forms with 330 participants. The purpose of this survey was

124 to measure the importance of pedestrian facilities according to people's perceptions. It  
125 included general information (age, gender, education) and highlighted street facilities'  
126 importance. People were asked to classify the importance of the selected indicators according  
127 to a scale of less important (1) to very important (5). Before the accurate data collection in  
128 June-august 2019, a pilot test with ten persons was carried out to verify the process and ensure  
129 the straightforwardness and clarity of all questions. The sample size is 330, based on the city  
130 population of 640,050, with a 95% confidence level and 5.4% margin of error. The survey's  
131 main purpose was to estimate the importance of pedestrian comfort features in general and not  
132 specially related to a specific street.

## 133 **2.1 Microclimatic measurements**

134 Three different streets were selected according to the following criteria: street  
135 morphology, slight slope, buildings' height, street orientation, length of the sidewalk,  
136 vegetative species, and distribution. We used microclimate monitoring instruments LM 8000  
137 (Thermo-Anemometer, Hygrometer, Thermometer & Illuminometer) at the height of 1.10 m  
138 from the ground, at specific points on the 26<sup>th</sup> and 28<sup>th</sup> of August 2017. Air temperature ( $T_a$ ),  
139 relative humidity (Rh), and wind speed ( $v$ ) were measured and recorded at the one-second  
140 interlude. The measurement precision of microclimatic variables was  $\pm 0.2$  °C, 3% (%) and  
141 0.2 (m/s). Every street has a specific measurement point near the sidewalk border to reduce  
142 the effect of unmeasured parameters and curtail interference with pedestrian observation and  
143 behavior. Finally, the third step involves the assessment of street facilities and PET.

144 To estimate these indicators, we calculated the coefficients using the survey results,  
145 scores with observation results, and PET based on the in situ measurement (to validate  
146 simulation by Envi-met tool and to get  $T_{mrt}$ ). The calibration process results allowed air  
147 temperature, wind speed, relative humidity, and  $T_{mrt}$  considered in the PET calculation with

148 the RayMan program. The SWTCI is based on the PLOS method. It can be calculated from  
 149 Eq (1) (Labdaoui et al., 2021) :

150 
$$\text{SWTCI} = ((\sum_{i=1}^{i=22} C_i \times S_i) / \sum_{i=1}^{i=22} C_i) \times 100 \dots \dots \dots \text{Eq. (1)}$$

151 *Where Ci: Coefficient of each indicator, Si: Score of each indicator.*

152 **Table 2** shows the suggested categories of (SWTCI) from A to F, in line with other  
 153 point system studies related to pedestrians (Aghaabbasi et al., 2017; Asadi-Shekari et al.,  
 154 2014; Moeinaddini et al., 2015). Thus, class (A) presents the highest comfort quality with 80-  
 155 100 scores while the (F) category is the lowest class, estimated very uncomfortable with 1-19  
 156 scores.

157 **Table 2** CWTCI % interpretation

SWTCI % rating	Model score	Interpretation
A	80-100	The highest quality (very comfortable); reflecting the existence of many comfort pedestrian facilities.
B	60-79	High-quality (acceptable), some comfort pedestrian facilities present.
C	40-59	Average quality (rarely comfortable), pedestrian comfort facilities present. However, the potential to improve pedestrian comfort conditions is omnipresent.
D	20-39	Low-quality (uncomfortable), minimal pedestrian facilities.
E	1-19	Lowest quality (unpleasant).
F	0	There are no standard pedestrian amenities (very uncomfortable).


158  
 159 **2.2 Sidewalk measurement in the pedestrian level of service (PLOS) methods**

160 Pedestrian level of service (PLOS) methods are extensively used in urban and  
 161 transportation models. The macro and micro design methods are relevant in measuring  
 162 pedestrian environments (Aghaabbasi et al., 2017). Although the micro design factors are  
 163 crucial to analyze the walking environment's quality (Asadi-Shekari et al., 2019; Southworth,



164 2005), many existing PLOS models explored just the macro-scale approach. The latter  
 165 approach considers macro design factors such as density, diversity, design, destination  
 166 accessibility, and distance to transit (Kim et al., 2014).

167 Since the current study's scope is street level, the focus is on PLOS models at the  
 168 street scale (considering micro design factors). These PLOS models have different techniques  
 169 and characteristics. However, each one has its benefits and drawbacks regarding sidewalk  
 170 measurement. Fig 2 shows the primary types of indicators and scopes included in these PLOS  
 171 models for the sidewalk assessment.

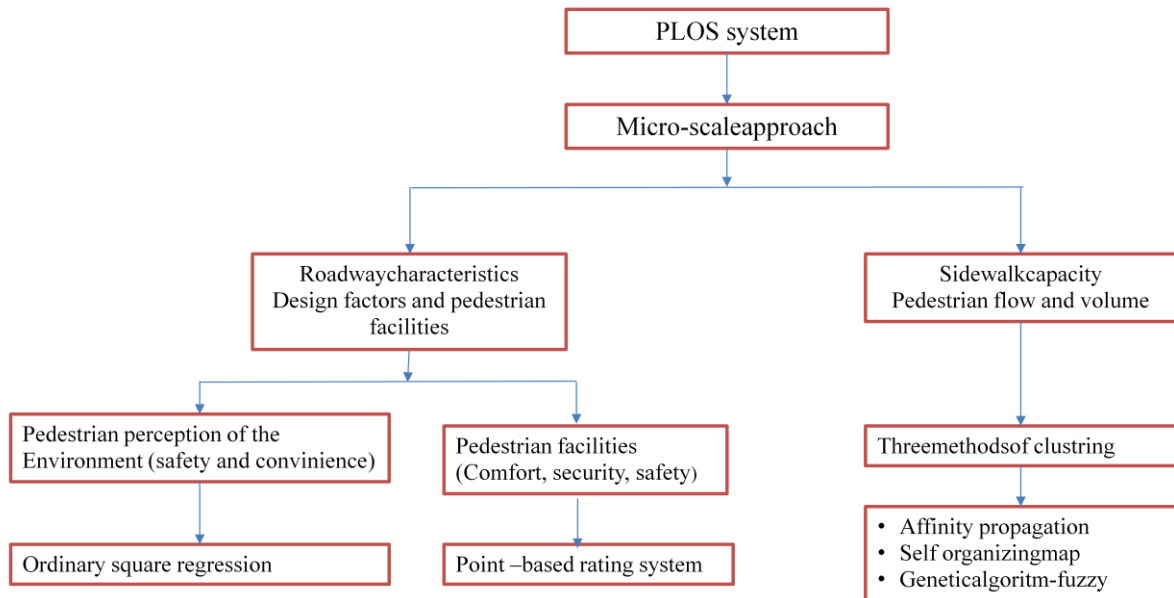

172  
 173 **Fig. 2.** Main scopes for PLOS models at the street level (Asadi-Shekari et al., 2013)

174 Some studies characterized the PLOS as a classification question. For example,  
 175 Sahani and Bhuyan (2014) investigated three clustering methods, counting affinity  
 176 propagation, self-coordinating map in artificial neural networks, and genetic algorithm-fuzzy  
 177 (GA-Fuzzy) approach. Despite clarifying that GA-Fuzzy the most relevant clustering, this  
 178 method only focused on capacity and met some related indicators such as pedestrian space,  
 179 flow, volume to capacity ratio, and pedestrian speed, rather than the principal aim of PLOS  
 180 for sidewalk facilities (Asadi-Shekari et al., 2019).

181 According to Asadi-Shekari et al.( 2019), the PLOS method at the street level could be  
182 categorized into two major categories (Asadi-Shekari et al., 2013b, 2013a). The first category  
183 includes capacity-based tools that concentrate on sidewalk capacity, pedestrian flow, and  
184 volume. Ignoring micro-level design factors in walkability evaluation (e.g., Fruin, 1971;  
185 Manual, 2000), such as curb ramp, accessible drinking fountain, lighting, seating area,  
186 landscape, and trees. The second category includes the roadway aspects-based model that  
187 emphasizes design factors and pedestrian facilities (e.g., Asadi-Shekari et al., 2014, 2013b,  
188 2013a; Landis et al., 2001; Sarkar S., 1993; Tan et al., 2007). The first method was criticized  
189 because pedestrians were comparable to cars and not users with special needs (Asadi-Shekari  
190 et al., 2013b, 2013a). Therefore, the second approach is more suitable for measuring  
191 walkability based on comfort-related factors that focus on this study.

192 Miller et al. (2000) suggested a point system in their PLOS evaluation. However, the  
193 restrained number of street facilities and users was inadequate for assessing inclusive streets.  
194 Landis et al. (2001) and Jensen (2007) explored more street factors to measure the PLOS.  
195 However, they applied an ordinary squares regression and found a few significant indicators  
196 that exclude people with disabilities. Asadi-Shekari et al. (2013b) suggested a point system as  
197 a suitable method for their PLOS model to explore micro-level design factors for all people,  
198 including people with disabilities. Although they consider weights and different measurement  
199 scores to include all possible conditions and avoid subjectivity in their evaluation, they did not  
200 consider PET in their proposed point system.

### 201 **2.3 Thermal comfort indices**

202 We selected PET to represent thermal comfort because it was applied and validated  
203 in multiple climates and urban areas (Gulyás et al., 2006; Johansson et al., 2014; Matzarakis  
204 et al., 2007; Thorsson et al., 2007) based on field surveys (Elnabawi et al., 2016; Lin et al.,  
205 2013; Nikolopoulou et al., 2001; Nikolopoulou and Lykoudis, 2006). Besides, PET was

206 associated with the Mean Thermal Sensation Vote (MTSV) within the hot and cold climate.  
207 Therefore, the assignment scores of PET are related to the human thermal sensation scale in  
208 the Mediterranean climate based on Potchter et al. (2018) findings.

209 Many studies explored PET based on in situ measurements using Envi-met or RayMan  
210 software. The Envi-met model is a three-dimensional micro-meteorological program (Bruse  
211 and Fler, 1998) and is considered one of the few micro-scale models that meet the required  
212 precise simulation standards. It verifies the correlation between the physical processes and the  
213 resulting micro-meteorological conditions in the urban canopy and thermal boundary layer  
214 (Lee et al., 2016). Also, it has been applied in simulations of the micro-climate and human-  
215 bio-meteorological influence of street design, building, and urban greening (Ali-Toudert and  
216 Mayer, 2007, 2006; Lee et al., 2016). Therefore, Envi-met was used in our study to calibrate  
217 data and get the Mean radiant temperature ( $T_{mrt}$ ).

218 RayMan is considered one of the most successful radiations and bio-climate models  
219 (Cohen et al., 2013; Elnabawi et al., 2016). This software was developed according to the  
220 German Engineering Society's guidelines (VDI, 1998), University of Freiburg, Germany. It  
221 assesses PET according to different parameters (e.g., air temperature, air humidity, wind  
222 velocity, cloud cover, time of the day and year), and human clothing (0.9 clo), and activity (80  
223 W) (Matzarakis et al., 2010, 2007).

224 Few studies combined the two programs to get more accurate results. Recent works  
225 adopt this approach in distinct outdoor environments (e.g., streets, parks, squares) within  
226 different climate zones, despite their rarity in the Mediterranean climate (Table 3).

227 **Table3** Overview of PET calculations method in outdoor environments

Authors	Thermal comfort indices	Area/climate	Urbanlayout	Climatic /Microclimaticindicators	Method
Andreou, 2013	PET	Tinos, Greece	Streets (geometry, orientation)	Basic meteorological data	Calculation of PET using the Rayman v.1.2 tool Calculation of $T_{mrt}$ Calculation Solar access and shading Calculating PET
Salata et al. 2016	PET	The Mediterranean climate, Csa	Street, square.	In-situ measurements	Calculating $T_{mrt}$  Questionnaire for (MTSVs)
Klemm et al. 2015	PET	Netherlands	Parks (size, tree canopy, upwind vegetation cover)	In-situ measurements	PET Calculation using Rayman software. Calculating $T_{mrt}$ Questionnaire for inhabitants' long-term perception of thermal comfort on warm summer days
Taleghani and Berardi, 2018	PET	Toronto	square	Climatic data In-situ measurements	ENVI-met simulations Simulated results (Air temperature, $T_{mrt}$ , and surface temperature)
Liu et al. 2016	PET	Changsha, China	Park, square, grassland, 3kind of the sidewalk.	In-situ measurements	PET Calculation using Rayman software. Surveys during 4 seasons
Lee et al. 2016	PET	Freiburg, Germany	Residential district	In-situ measurements Climatic data	PET and $T_{mrt}$ are calculated using ENVI-met Calculating PET using Rayman
Cohen et al. 2013	PET	The Mediterranean climate	Park, Square, Street	In-situ measurements	Statistical data analysis of the in-situ Subjective thermal sensation voter records on the questionnaires with PET values Calculating PET using Rayman
Elnabawi et al. 2016	PET	Hot Arid Climate of Egypt	Streets In Medieval Cairo	In-situ measurements	Subjective thermal sensation records the questionnaires with PET values Calculating PET using Rayman
Morakinyo et al. 2017	PET	Hong Kong	Street canyon.	In-situ measurements	Calculating $T_{mrt}$ using Envi-met software Shades ENVI-met simulations, its impact on thermal comfort

228 The main aim of this study is the application of the SWTCI at different street  
229 morphologies. The survey is also designed to estimate the importance of the indicators for  
230 available street types. However, for particular street types like tiny streets, some indicators  
231 such as slower traffic speed, marking (crosswalk), mid-block crossing, and slower traffic  
232 speed, could be freeze. Therefore, the proposed method can be used for general street types in  
233 different cities and particular streets and cities. The included indicators and weights need to be  
234 justified and localized. The SWTCI within Csa is applied according to the following method.

## 235 **2.4 Assessing indicators**

236 One of the main limitations for PLOS point systems like Asadi-Shekari et al.  
237 (2013b) is ignoring the perceptions and PET. This study fills this gap by using people's  
238 perceptions and viewpoints as weights and coefficients for the indicators and including the  
239 PET effects. In addition, a series of in situ observations is also used to evaluate each comfort  
240 indicator's state objectively and measure their scores (Asadi-Shekari et al., 2014).

### 241 **2.4.1 Pedestrian comfort facilities coefficients and scores**

242 The questionnaire survey measured 21 street design indicators' importance, using a  
243 five-point Likert scale ranging from 1 (least important) to 5 (very important). This survey  
244 explored people's perceptions regarding the matter of pedestrian facilities. In total, 330  
245 respondents in Annaba completed the survey online. The survey data are used to achieve each  
246 comfort indicator's relative weight (coefficient) (C<sub>i</sub>).

247 Using the observation technique seeks to quantify every pedestrian comfort indicator  
248 as a score (S<sub>i</sub>), indicating a number between 0 and 1. The score (1), considered the best  
249 score, reveals a relevant match between the existing street condition and the guideline  
250 requirements. In contrast, the score (0) means no link or the indicator is not existing in the


251 case study. There are also some scores between 0 and 1 to cover the semi-fitness situations.  
252 For more details, refer to Appendix A and B.

#### 253 **2.4.2 Calculating and scoring PET**

254 To understand thermal comfort impact on pedestrians, PET was computed on the  
255 selected streets using RayMan (Matzarakis et al., 2010, 2007). This study also used the spatial  
256 height performance and temporal microclimate resolution model, the Envi-met 4 software that  
257 can generate simulations by designing the building's architecture and vegetation model (Wu  
258 and Chen, 2017). Before PET calculation, the  $T_{mrt}$  was measured through the calibration  
259 process using the full forcing command (24h) with Annaba weather records data (26<sup>th</sup> and 28<sup>th</sup>  
260 of August 2017).

261 We validated the calibrated model based on the difference between simulated and  
262 measured air temperature, which showed a good performance between the two data sets  
263 (Elnabawi et al., 2013; Taleghani and Berardi, 2018)  $Y=0.862x+3.909$ ,  $R^2=0.84$  (Fig3).  
264 Consequently, we got four calibrated data: air temperature, wind velocity, relative humidity,  
265 and  $T_{mrt}$ . Therefore, based on these calibrated data (Klemm et al., 2015; Lobaccaro and Acero,  
266 2015; Morakinyo et al., 2017; Taleghani and Berardi, 2018), we calculate PET from 8 am to 8  
267 pm (Fig 1).

268

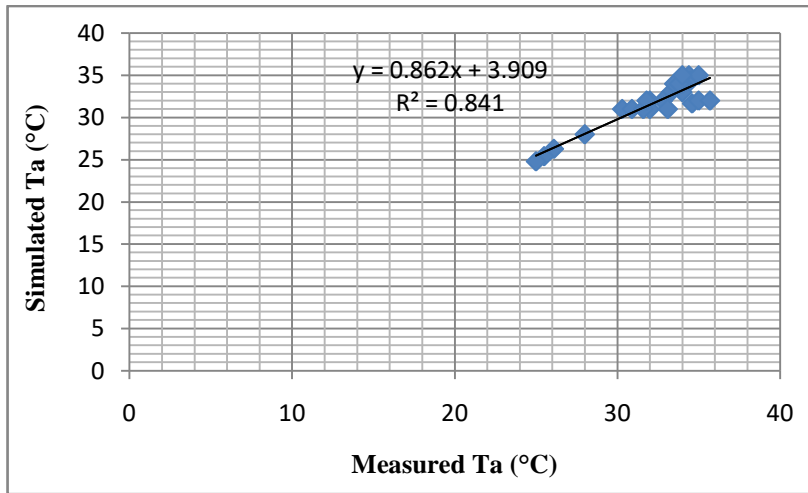

269

270

**Fig.3.** Correlation between simulated and measured air temperature.

271

272

273

274

275

276

277

278

To score PET in the Mediterranean climate, we applied a scale from 0 to 1 (Labdaoui et al., 2021), considering the defined thermal sensation vote (TSV) in Tel Aviv, characterized by a Csa. Thus, despite the same climate classification, both cities have the same level from the sea +5m. According to Potchter et al. (2018), the thermal comfort range in Tel Aviv is between 19°C -25°C in winter and 20°C - 26°C in summer. Therefore, for cold, hot, and very hot thermal sensations, the PET score is 0. For cool and warm thermal perception, the score is 0.25; for slightly cool and slightly warm, the score is 0.5. Finally, the neutral thermal sensation reaches the score of 1. (Refer to Tables 4 and 5).

279

280

**Table 4** Thermal sensation and PET range for Tel Aviv (Csa climate) (Cohen et al., 2013; Lin and Matzarakis, 2008; Matzarakis et al., 1999; Potchter et al., 2018)

TSV	Thermal sensation	PET range for Tel Aviv (°C)	Tel Aviv Climatic zone (Koppen classification)
-4	Very cold	-	Csa
-3	Cold	8	
-2	Cool	12	
-1	Slightly cool	15	
0	Neutral	19	
1	Slightly warm	26	
2	Warm	28	
3	Hot	34	
4	Very hot	40	

281

282

<sup>a</sup>Vote scale (TSV), Warm Mediterranean Climate (Csa).

283 **Table 5** PET scores according to the Thermal sensation and PET range in Csa Climate  
284 (Labdaoui et al., 2021).

PET range	PET scores
>8°C	0
8° C-12° C	0.25
12.1°C-15°C	0.5
19.1° C-26°C	1
26.1°C-28° C	0.5
28.1° C-34° C	0.25
34.1° C-40° C	0

285

## 286 **2.5Case Study**

287 The field study was conducted in Annaba city, Algeria, located between (Latitude  
288 36° 54' North, Longitude: 7° 46' East, Sea level: +5m). Annaba is defined by the Hot Summer  
289 Mediterranean climate (Csa), according to Köppen (2020) classification. Annaba city gathers  
290 a population of 640,050 inhabitants, according to The National office of statistics (2008). We  
291 selected three different streets in three diverse neighborhoods in Annaba city (Fig 4). The first  
292 segment in Colonial Centre is a regular and furnished street (Having minimum pedestrian  
293 features) with North-East, South-West orientation, and h/w=2. The second case in the  
294 medieval neighborhood (Medina) with East West orientation has an irregular morphology and  
295 has a ratio h/w equivalent to 1.83. The last street was in El Bouni neighborhood (Suburban  
296 area), with a North-South direction characterized by a regular morphology with h/w=0.29, but  
297 it is unfurnished (Table 6). These selections are just for testing the proposed STWCI in  
298 different types of streets, and the proposed STWCI can be used to measure walkability for  
299 other streets.

300

301

302

303



304

**Table 6** The characteristics of the selected streets

<b>Streets' characteristics</b>	<b>Street1</b>	<b>Street2</b>	<b>Street3</b>
Length	512.9 m	323.22m	299.68m
Orientation	NE/SW	E/W	N/S
High of building	16m	11m-13m	12m - 15.5m
Ratio h/w	2	1.83	0.29
Vegetative elements (Trees)	0	3	0
Building's material	stones	Stones/Solid bricks	Precast concrete walls
Building's color	White	White	Yellow
Footpath material	Pavement	Concrete	Unfurnished+ concrete stranded tiles.

305 NE/SW: North East/South West, E/W: East/West, N/S: North/South

306

307

308

309

310

311



312

313 — Street 1 in Colonial Center, — Street 2 in Medieval neighbourhood, — Street 3 in El Bouni



314

315 **Fig.4.** Location of selected streets at three distinct neighbourhoods.

316 Source: Google images, 2020

317

### 318 **3. Results**

#### 319 **3.1 Pedestrian comfort facilities coefficients and observation scores**

##### 320 **3.1.1 Sample characteristics**

321 The sample comprised 330 respondents, 53% male and 47% female. Some age  
322 categories were more involved than others. The results showed 64% of the response are  
323 related to the 25-34 category, followed by the 35-44 years group. In comparison, the youngest  
324 group (18-24 years old), and 45-54 years and 55-64 years, represented only 8%, 3%, 5%  
325 survey responses. Two categories, 65-74 years and +75years old, didn't take part in the  
326 survey. Since this survey's main purpose is to estimate just the importance of the indicators,  
327 the scores are calculated using objective measurement methods. Therefore, the differences in  
328 age categories, mainly because of the online data collection, cannot affect the scores. In  
329 addition, the 25-44 age categories can represent the majority of the pedestrian population in  
330 the city, and the estimated weights can represent the opinions of the majority of the pedestrian  
331 population.

##### 332 **3.1.2 Coefficient results**

333 The first column in Table 6 presents the coefficients of comfort walkability  
334 indicators. Over 95% of the suggested factors such as landscape and trees, footpath pavement,  
335 shade, bench and seating area, and social space(café) are considered very important and  
336 highly significant (0.80 and 0.93). Other indicators such as the ramp, pedestrian signals,  
337 footpath width, and slope are estimated as essential (0.67-0.77). However, a single indicator  
338 (trash receptacle) was supposed less critical, having a score of 0.32.

##### 339 **3.1.3 Observation scores result**

340 From the data presented in the second column of Table 7, six pedestrian comfort  
341 indicators had a score of 1. This value demonstrated an actual presence of factors on the  
342 street in Colonial center (e.g., social space (café), the sidewalk on both sides, slower traffic

343 speed, few traffic lanes). On the other hand, footpath pavement, the width of the footpath, and  
344 buffer/barriers (curb and furnishing zone) has 0.8, 0.8, and 0.5 scores, respectively, estimated  
345 present on the street. Still, they are not meeting the recommended standard. However, a score  
346 of 0 suggests the non-existence of the pedestrian comfort facilities in the street segment.

347 The third column shows the observation scores of Street 2 in the medieval  
348 neighborhood (medina). The highest score (1) is assigned to social space (café), slower traffic  
349 speed, few traffic lanes, so they are available and correspond to the referred methodological  
350 calculations. Alternatively, the ramp and standard driveway are not existing in the street.  
351 Other indicators to which scores are 0.13, 0.12 reflect no weight (e.g., footpath pavement and  
352 width of the footpath). In comparison, the sidewalk on both sides and buffer/barriers (curb  
353 and furnishing zone) indicators, with respectively 0.39 and 0.5 scores, highlight a failure with  
354 the required standards. However, the rest of the comfort walkability indicators having a score  
355 equivalent to 0 showed their total absence on the street.

356 The last column exhibits the observation scores at street 3 (El Bouni neighborhood).  
357 Most of the street comfort facilities had a 0 score, reflecting their lack on the street. Other  
358 indicators such as buffer and barriers, having a score of 0.5, indicated a deficiency with the  
359 recommended standard. However, social space (café), slower traffic speed, fewer traffic lanes  
360 scored the highest value 1, which implies their standard appearance on the street, while ramp  
361 and standard driveway are not available.

362

363

364

365

366 **Table7** The scores and coefficients of street comfort indicators

		<b>Street1</b>	<b>Street2</b>	<b>Street3</b>
	<b>Length</b>	512.9 m	323.22m	299.68m
	<b>Orientation</b>	NE/SW	East/West	N/S
<b>Indicators</b>	<b>Coefficients</b>	<b>Scores</b>	<b>Scores</b>	<b>Scores</b>
Landscape and trees	0.93	0	0.13	0
Footpath pavement	0.93	0.8	0.12	0
Marking (crosswalk)	0.85	0	0	0
Park and space for playing	0.85	0	0	0
		1	1	1
		1	1	1
Shade/Thermal comfort	0.85	0.5	0.5	0.25
		0.25	0.25	0.5
		0.25	0.25	0.25
		0.5	0.5	0.25
		1	1	1
Benches and seating area	0.84	0	0	0
Toilet	0.82	0	0	0
Buffer and barriers (curb and furnishing zone)	0.81	0.5	0.5	0.5
Social space (café)	0.8	1	1	1
Sidewalk on both sides	0.8	1	0.39	0
Ramp	0.77	1	1	1
Mid-block crossing	0.76	0	0	0
Pedestrian signal	0.76	0	0	0
Width of footpath	0.75	0.8	0.12	0
Shorter crossing distance (curb extension)	0.73	0	0	0
Slower traffic speed	0.72	1	1	1
Slope	0.71	0	0	0
Lighting	0.69	0	0	0
Fewer traffic lanes	0.68	1	1	1
Standard driveway	0.67	1	1	1
Furniture and facilities (trash receptacle)	0.32	0	0	0

367 NE/SW: North East/South West, E/W: East/West, N/S: North/South

368 **3.2 Thermal comfort results and scores**

369 It is essential to mention that PET was computed based on four calibrated  
370 microclimatic data (Air temperature, Relative humidity, wind velocity, and Mean radiant  
371 temperature) at the three selected streets on the 26<sup>th</sup> and 28<sup>th</sup> of August 2017 (Table 8).The  
372 purpose of this study is to estimate PET for the general population and not individuals.

373 Therefore, some parameters like clothing and activity are used to represent the general  
374 population (clothing: 0.9 clo and activity: 80 W).

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390 **Table 8** Microclimatic data and PET results using Envi-met and RayMan software.

Time (H)	Calibrated data (Envi-met)				RayMan PET1 (°C)	Calibrated data (Envi-met)				RayMan PET2 (°C)	Calibrated data (Envi-met)				RayMan PET3 (°C)
	Ta1 (°C)	Rh1 (%)	V1 (m/s)	Tmrt1 (°C)		Ta 2 (°C)	Rh 2 (%)	V 2 (m/s)	T <sub>mrt</sub> 2 (°C)		Ta 3 (°C)	Rh 3 (%)	V 3 (m/s)	T <sub>mrt</sub> (°C)	
8:00 AM	25.2- 25.3	below 94%	0.2- 0.4	13.3- 13.5	20.1	24.9- 25.1	96%	0.3-0.4	13.6-13.8	20	26	48%	0	12.8	19.9
10:00 AM	30.5- 30.6	68%	0.5- 0.9	17.7- 17.9	25.2	30.5- 30.6	below 73%	0.9-1.2	18.3-18.5	25.6	33.4	32%	0	19.9	26
12:00 PM	31.6-32	57%-59%	0.9- 1.9	18.7-19	26.5	31.1- 31.5	58%- 61%	2-2.6	19.1-19.3	26.4	34.7	28.50%	0.2	21.6	28.4
2:00 PM	33.9- 34.2	71%	0.8- 1.5	21.2- 21.5	29.4	33.2- 33.5	70%- 74%	1.6-1.9	21.7-22	29.5	31.6	50%	2.4	20.5	27.3
4:00 PM	34.6- 34.9	31%-32%	1-2.	23.9- 24.3	30.5	34.3- 34.5	below 33%	2.4-2.9	24.5-24.8	31	33.2	25%	2.6	23.8	29.5
6:00 PM	31-31.2	65%	1-1.97	22.6- 22.8	27.5	30.9- 31.1	65%- 69%	2.1-2.5	22.5-22.8	26.6	31.6	44%	0.5	23.6	28
8:00 PM	27.5- 27.6	81%-83%	0.7- 1.4	19	23.6	27.3- 27.4	below 83%	1-1.3	below 19.07	23.1	28.8	57%	0.5	20.1	24.8

391

392

393

394

395

396 **3.2.1 Microclimatic data**

397 The results show a significant difference in air temperature in the three streets. The  
398 lowest temperature was recorded in Street 2 (Medina) at 8 am, 24.9 °C, compared to Street 1  
399 (25.2°C) and Street 3 with 26°C. Although many hours reflected a high temperature (12 pm, 2  
400 pm, 4 pm), the T (a) at Streets 1 and 2 are similar at 10 am (30.5°C-30.6°C). However, Street  
401 2 showed the lower temperature at noon (31.1°C-31.5°C), 2 pm (33.2°C-33.5°C), 4 pm  
402 (34.3°C-34.5°C) in comparison to Street1 with (31.6°C-32°C), (33.9°C -34.2°C), and (34.6°C  
403 -34.9°C). At the same time, the highest temperature was recorded in Street 3 at noon (34.7°C).  
404 Considering relative humidity, Streets 1 and 2 recorded a higher percentage during the entire  
405 hours of the day. For example, at 8 pm, Street 1 has (81%-83%), Street 2 (below 83%) while  
406 Street 3 has 57% (Table 8).

407 The  $T_{mrt}$  emphasized noticeable differences. The lowest values were recorded at 8 am  
408 for the three streets. For example, Street 1 has 13.3°C -13.5°C, Street 2 recorded 13.6°C -  
409 13.8°C, and Street 3 has 12.8°C. However, at noon, street 1 has a lower  $T_{mrt}$  value than Street  
410 2 (19.1°C -19.3°C) and Street 3 with 21.6°C. Finally, the wind velocity recorded common low  
411 values at the three streets (Table 8).

412 The PET values at Streets1 and 2 are almost the same, especially during the hottest  
413 hours of the day. For example, at noon, the PET at Street 1 is 26.5°C, compared to Street 2  
414 (26.4°C). However, at 8 pm, Street 2 recorded a lower temperature (23.1°C) than Street 1  
415 (23.6°C). However, Street 3 registered the highest values of PET at all the hours of the day,  
416 compared to Street 1 and Street 2 (Table 7), except for 8 am where PET (19.9°C) was like  
417 Street 1 (20.1°C), and Street 2 (20°C). The results also showed a positive correlation between  
418 street orientation PET values and H/W. Indeed, Street 1 and Street 2 showed relative values of  
419 PET at the hottest hours of the day despite the difference in orientation (Street 1 NE/SW,



420 Street 2 E/W). However, the H/W at Street 2 (1.89) is lower than Street 1 (equivalent to 2),  
 421 showing a good level of shade. In contrast, Street 3 has N/S orientation, with H/W equivalent  
 422 to 0.29, highlighting a deficient shade level.

423 **3.2.2 PET coefficient and scores**

424 The PET coefficient was derived from the questionnaire survey. There is a specific  
 425 question about indicating the importance of thermal comfort for people during the walking  
 426 experience in the questionnaire. To define an "acceptable thermal range" for PET in summer,  
 427 TSVs were within the three major categories (Neutral, slightly warm, warm). We summarised  
 428 PET values and scores from 8am to 8pm according to thermal comfort ranking in Tel Aviv  
 429 with a Csa climate (Table 9). The PET is reaching its highest score (1) at 8 am, 10 am, and 8  
 430 pm, denoting a neutral thermal sensation. The lowest score is 0.25 at 4 pm on the three streets,  
 431 showing a warm thermal perception. PET had the same score of 0.5 and 0.25 at noon and 6  
 432 pm on Streets 1 and 2. Versus a warm thermal perception, with a score of 0.25 simultaneously  
 433 on Street 3 (See Fig 5).

434 **Table 9** PET values and score results in the selected streets.

Time	PET Street1	Scores	PET Street2	Scores	PET Street 3	Scores
8:00 AM	20.1	1	20	1	19.9	1
10:00 AM	25.2	1	25.6	1	26	1
12:00 PM	26.5	0.5	26.4	0.5	28.4	0.25
2:00 PM	29.4	0.25	29.5	0.25	27.3	0.5
4:00 PM	30.5	0.25	31	0.25	29.5	0.25
6:00 PM	27.5	0.5	26.6	0.5	28	0.25
8:00 PM	23.6	1	23.1	1	24.8	1


435

436

437

438

439

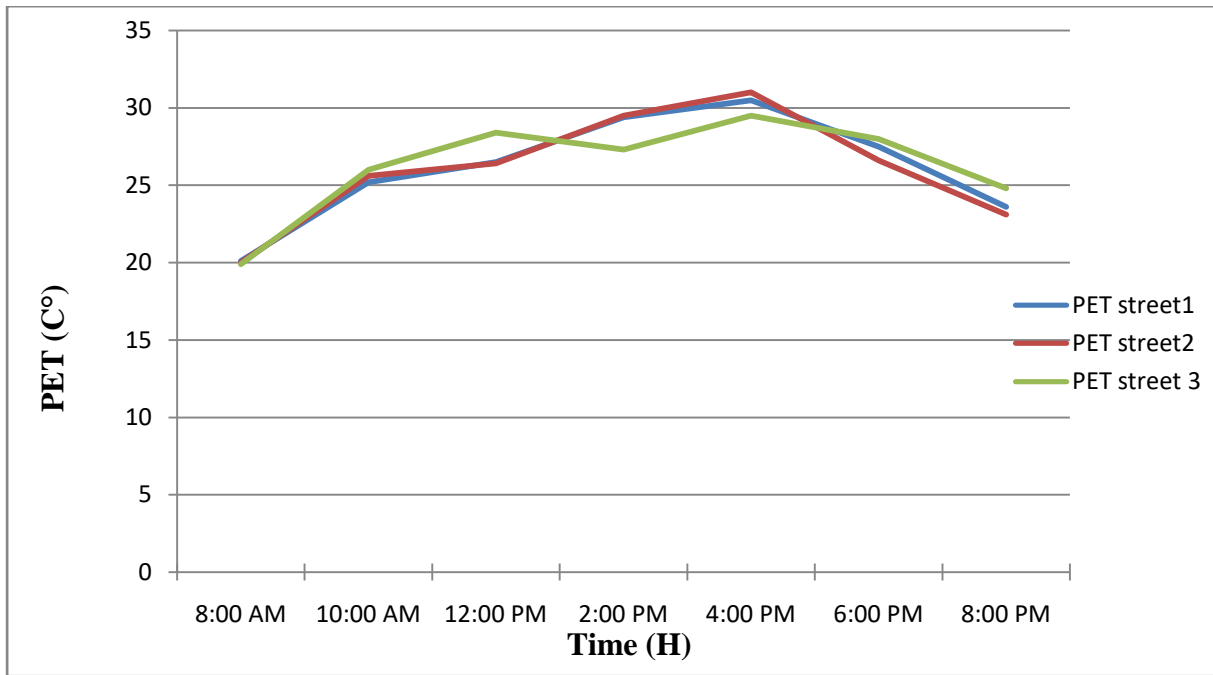

440

441

**Fig. 5.** Comparative analyses of PET results on three selected streets.

442

A straightforward analysis of the scores reveals that the same pedestrian facilities (e.g., social

443

space (café), slower traffic speed, and fewer traffic lanes) besides PET reached the maximum

444

scores of 1 at the three selected streets. However, the minimum values for the street facilities


445

(e.g., parks and spaces for playing, toilet, benches and seating area) were equivalent to 0,

446

while for the PET, the lowest score was 0.25 (See Fig 6).

447

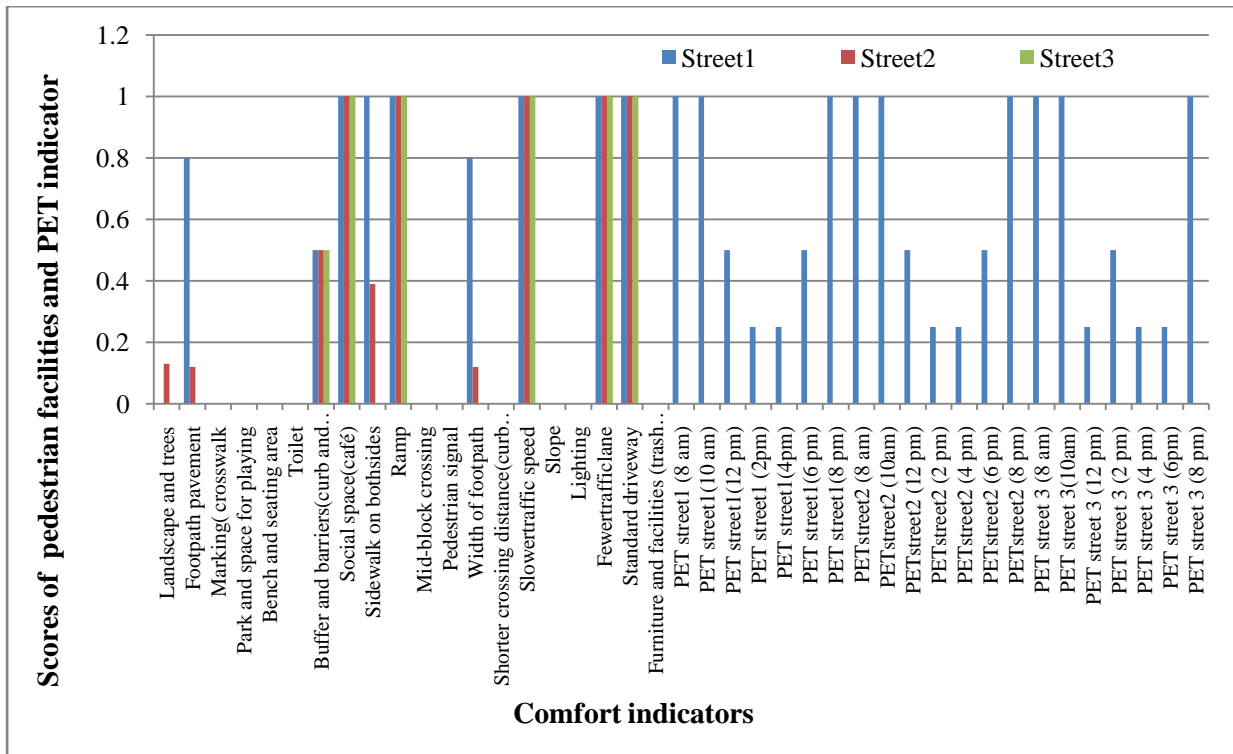

448

449 **Fig. 6.** Comparative analysis of comfort indicator scores on street level.

449

450 **3.3 Street Walkability Thermal Comfort Index (SWTC)**

450

451 The application of equation (1) allowed us to have the (SWTCI). The comparative  
 452 analysis of SWTCI outcomes showed low-quality comfort walkability indicators specified by  
 453 minimal pedestrian street design, which does not comply with international standards  
 454 (Table10). For example, the SWTCI in Street1 was between 30%-33%.In street 2, SWTCI  
 455 was included in the average of 23%-26%, and finally, the lowest scores were at Street 3(20  
 456 %< CWTCI< 23%) (Fig 8). Most of the comfort walkability indicators are not existing. The  
 457 selected streets are considered uncomfortable to use and unpleasant to walk (Table1).

458

459

460



471 According to the results, SWTCI reaches its highest score on the three streets at three  
472 hours a day, 8 am, 10 am, and 8 pm, when the thermal sensation is neutral with 32.90%,  
473 26.28%, and 23.28%, respectively. However, SWTCI gets the minimum rating at 4 pm when  
474 the thermal perception is warm, showing 29.86%, 23.24%, and 20.23%, respectively (Fig 8).


475 The corresponding SWTCI values at street1 got 30.85% and 29.86% by increasing  
476 from noon to 4 pm. That is reflecting a slightly warm and warm thermal sensation,  
477 respectively. STCWI was rising from 6 pm to 8 pm with 30.8% and 32.90% (Fig 7.a). The  
478 variation of STCWI was similar in the two streets (Colonial Center and Medina)(Fig7.a, b);  
479 however, the STCWI rating on Street 1 was higher than Street 2 (Fig 8).

480 Regarding Street 3 (El Bouni neighborhood), the results show a noticeable difference  
481 comparing to the previous STCWI rating. Three hours a day (12 am, 4 pm, and 6 pm)  
482 characterized by a warm thermal sensation get the lowest STCWI rating (20.23%, 20.24%)  
483 respectively (Fig 7.c). However, STCWI ranking at Street 3 is inferior to both previous  
484 STCWI results (Fig 8).


485

486


487

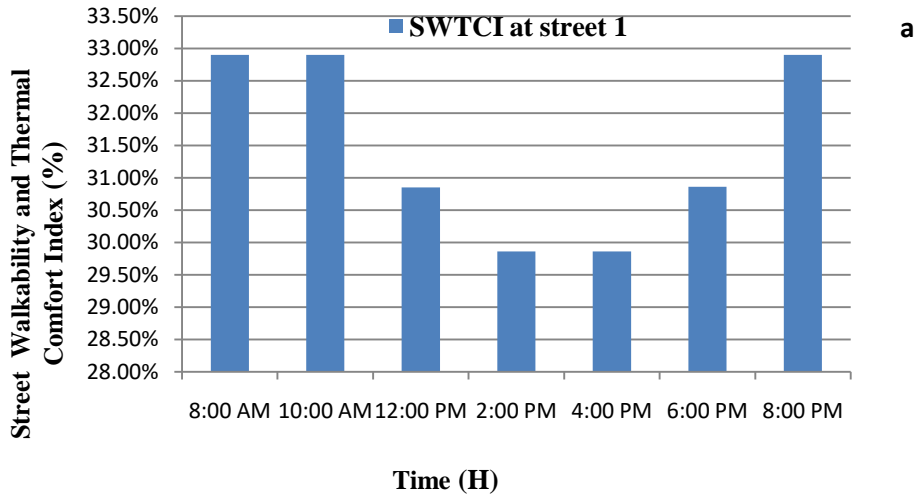

488

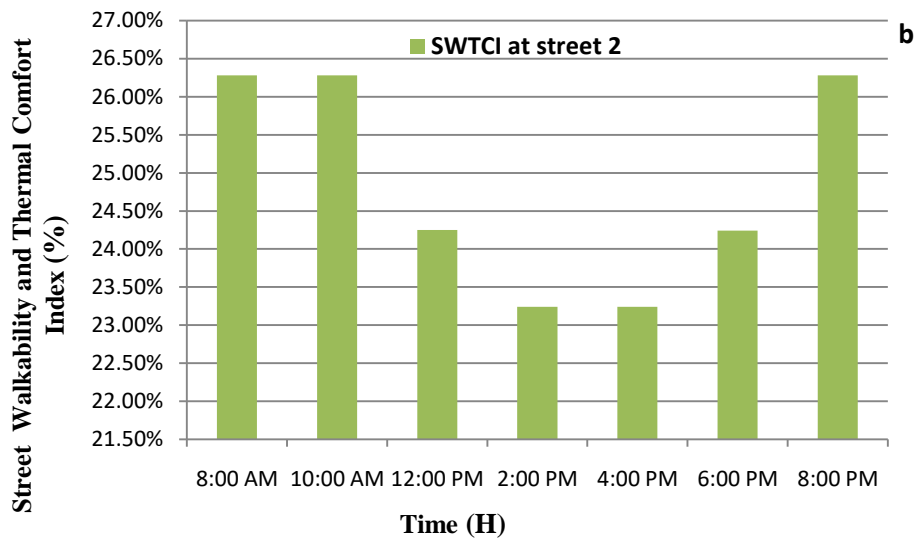

489

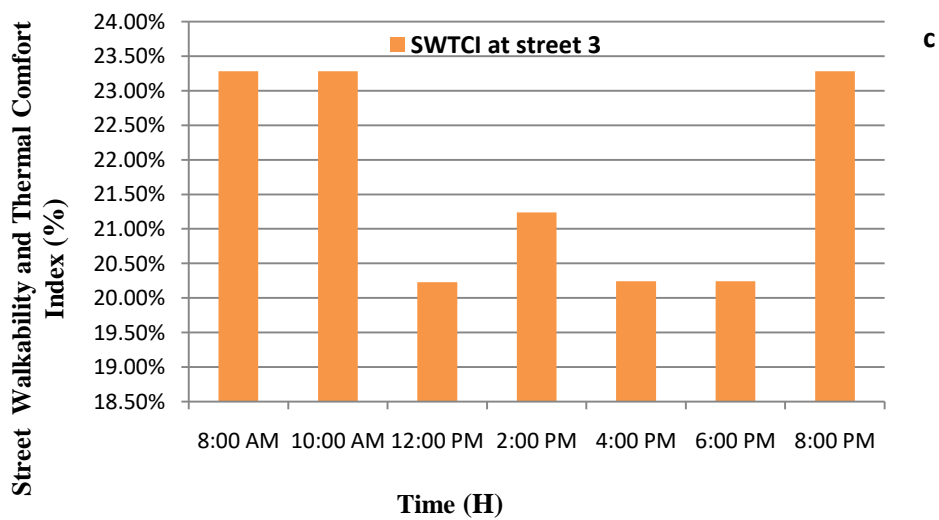


490

491

**Street 1** in the Colonial center, **Street 2** in Medievalneighborhood (Medina), **Street 3** in El Bouni

492

**Fig. 7.** Street walkability Thermal Comfort Index at the selected streets

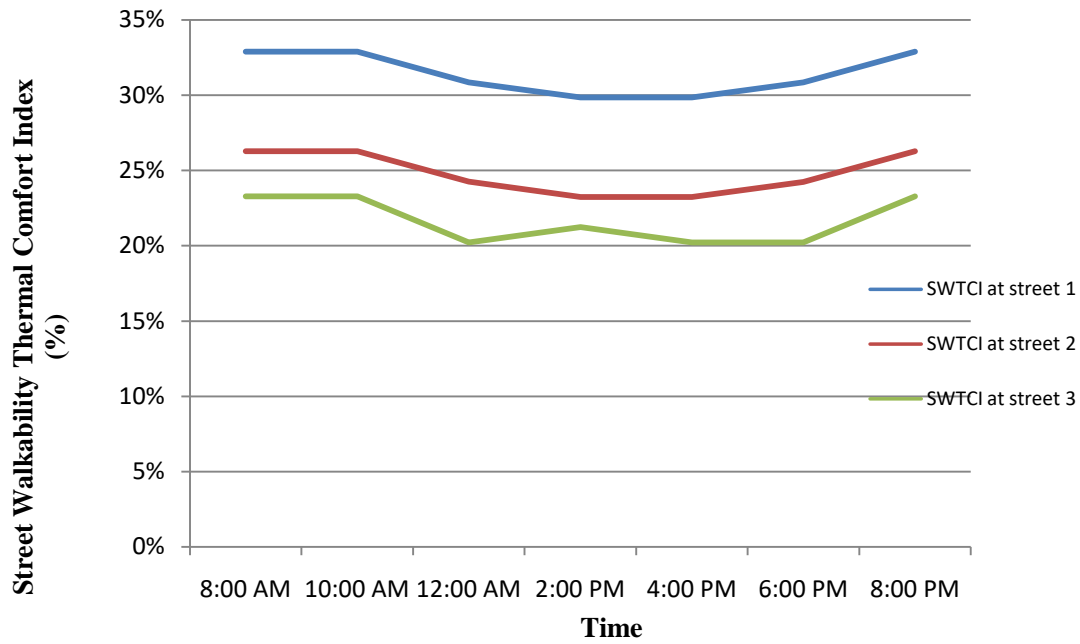

493  
494 **Fig. 8.** Comparatives analysis of the Street Walkability Thermal Comfort Index on the  
495 selected streets

496 **4. Discussion**

497 To make the walking experience pleasant and more suitable, we need a pertinent  
498 rating system that can evaluate the existing pedestrian comfort environment and identify the  
499 problems that can be used for suggesting solutions. In this aim, the current research intended  
500 to examine 22 comfort walkability indicators on the sidewalk scale, using an innovative  
501 method including pedestrian comfort facilities and PET. The proposed model was tested in  
502 Annaba; Algeria. This model fulfilled the need for rating pedestrian comfort and enhancing  
503 walkability scores by combining street comfort design and thermal comfort.

504 **4.1 Impact of the pedestrian comfort facilities**

505 This study's findings showed the relevance of the selected indicators. Indeed, most  
506 themes are valued as very relevant for pedestrian comfort. Besides offering convenience, the  
507 requested factors included a potential sign of safety, attractiveness, and usability. For  
508 example, besides suitable signage and sufficient time for crossings, the speed limit provides

509 comfort and safety (Lamour et al., 2019; Mateo-Babiano, 2016). Street lighting provides a  
510 pleasant and secure pedestrian setting at night (Loukaitou-Sideris, 2006). Also, the results  
511 reveal some other crucial comfort attributes such as a sidewalk on sides, foot pavement, the  
512 width of the footpath, benches, and seating area. Those define pedestrian convenience and  
513 ensure a pleasant walking experience (Aghaabbasi et al., 2018) for all categories, including  
514 children, older adults, and people with disabilities. Moreover, these indicators allowed  
515 enjoying the social life (Jacobs, 1993; Marcus and Francis, 1997). Slope, toilets, curb ramps  
516 are necessary for pedestrian comfort and ensure usability and accessibility (Asadi-Shekari et  
517 al., 2019).

#### 518 **4.2 The PET effect on walking comfort**

519 The Envi-met model allows human thermal comfort simulation for the current and  
520 future climatic conditions estimated by regional climate models. The calibrated model was  
521 successfully validated based on the difference between measured and simulated air  
522 temperature, showing a good correlation between set data (Acero and Herranz-Pascual, 2015;  
523 Chen and Ng, 2013; Müller et al., 2014). This study also used the Rayman software to  
524 calculate the PET based on calibrated data to provide more accurate data of the existing  
525 thermal comfort model. For example, simulated  $T_a$  and  $T_{mrt}$  values agree much better with  
526 measurement data (Lee et al., 2016; Tan et al., 2016). Moreover, the results highlighted the  
527 h/w ratio and orientation on thermal comfort conditions (Andreou, 2013). For example, Street  
528 3 (h/w of 4) has higher air temperature,  $T_{mrt}$ , and PET values in comparison to Street1 (h/w of  
529 2) and Street 2 (h/w of 1.83).

530 As introduced in Tables 4 and 5, the thermal sensation advised for the summer time in  
531 the Csa climate are neutral, slightly warm, and warm. Formerly PET ranking amid 19.9°C and  
532 31°C. The inquiry of results PET scores was fluctuating according to the time of day in



533 summer. The PET results at the three selected streets showed the similarity of PET ratings in  
534 Street1 and Street 2 from 8 am to 4 pm. However, PET in Street 2 is lower than PET at  
535 Street1 from 6 pm to 8 pm. We noted that the thermal sensation in both streets (Streets 1 and  
536 2) is almost the same (Table 9, Fig 6). Alternatively, PET at Street 3 is higher than the  
537 previous streets, which involve a warm sensation in three significant hours of the day (12 am,  
538 4 pm; 6 pm) with a harmful effect on pedestrian comfort.

539 Those findings are strongly supported by Wu and Chen (2017), confirming the  
540 importance of the High-rise building on both sides of streets; their shades significantly impact  
541 the thermal near-surface surrounding environment. Indeed, the concrete pavement surface  
542 temperatures shaded by buildings were relatively 16 °C lower than those bared to solar  
543 radiation during mid-day in the summer. Besides being significantly crucial to citizens, trees  
544 provide shade, allowed walking during the hottest hours of the day. Indeed trees generate the  
545 cooling effect by reducing air temperature and  $T_{mrt}$  (Bowler et al., 2010; Lee et al., 2016,  
546 2013; Lee and Mayer, 2015; Mullaney et al., 2015). Moreover, the urban green cover can  
547 massively absorb high amounts of solar radiation (Shortwave and long-wave radiation) (Oke,  
548 1982) and adding aesthetic value (Sousa et al., 2016).

#### 549 **4.1.2 Interactivity of PET and pedestrian comfort facilities on SWTCI**

550

551 Among the many output possibilities derived from the SWTCI tool, we extracted  
552 those aiming to illustrate the PET assessment's usefulness.

553 The highest SWTCI at the three streets (33%,26%, and 23%) was correlated to neutral  
554 thermal sensation, reflecting the lowest amounts of PET followed by slightly warm. On the  
555 other hand, the lowest SWTCI rate in the selected streets (30%, 23%, and 20%) was related to  
556 the warm category of thermal sensation. In this optic, we can confirm the importance of PET  
557 in the assessment of the SWTCI process. Thermal comfort is considered a vital comfort

558 walkability factor in improving pedestrian activity and a healthy environment, confirming the  
559 importance of the climatic conditions in outdoor urban spaces and the quality of life and  
560 wellbeing in cities(Cohen et al., 2013; Givoni, B et al., 2003).

561 Furthermore, the results recommended walking hours activity at 8 am,10 am, and 8  
562 pm defined as thermally comfortable hours in summer with a neutral thermal sensation  
563 ( $20 < PET < 26$ ), followed by 6 pm with a slightly warm thermal perception ( $26.84 < PET < 27.5$ ).  
564 However, the warm thermal sensation is not recommended for walking and made an  
565 uncomfortable condition ( $28 < PET < 31$ ) at 12 am and 2 pm. Thus, the pedestrians walking in  
566 the shaded zone could improve thermal sensation (Lee et al., 2020). For example, the thermal  
567 sensation scale is expressed as slightly warm instead of warm for subtropical climates (Huang  
568 et al., 2017).

569 The proposed model can improve the pedestrian street comfort design by suggesting  
570 enhancing the indicators scores and comparing existing conditions with standards. Some  
571 pedestrian facilities such as landscape and trees and footpath pavement have a dual role; first,  
572 they improve the sidewalk's comfort conditions, and second; they increase pedestrians'  
573 thermal comfort. Landscape and trees are considered the principal component of  
574 attractiveness, safety, and usability on street level (Aghaabbasi et al., 2019, 2017).Adding  
575 vegetation can reduce mid-daytime heat by shading ground and evapotranspiration (Donovan  
576 and Butry, 2009; Gillner et al., 2015; Wu and Chen, 2017) and promoting walking hot hours  
577 of the day. Also, some paving materials such as cement tiles facilitate the accessibility of  
578 wheelchairs and stroller. The tiles with lighter pigmentation can absorb less heat and permit  
579 better thermal comfort (Synnefa et al., 2006).

580 Regarding the evaluated streets in this study, enhancing some pedestrian comfort  
581 facilities scores such as landscape and trees, benches and seating area, lighting, the width of

582 the footpath, footpath materials can significantly improve the SWTCI rates. We can enhance  
583 the pedestrians' comfort by analyzing the existing variable's quality standards (See Table 7  
584 and Appendices A and B and C). The comfort indicators could achieve the ideal score of 1 by  
585 performing current scores. Thus, applying the suggested improvements in Appendix C leads  
586 to a relevant upgrade to SWTCI3. Indeed, it increased from 23% to 38% but still included in  
587 the same category (D).

588 Although the SWTCI results correlate to the PET, improving other pedestrian  
589 comfort indicators can significantly affect the SWTCI. For example, for a street without a  
590 sidewalk, most of the scores will be zero regardless of PET. In addition, some pedestrian  
591 facilities, such as footpath pavement (pavement type material) as well as landscape and trees,  
592 could have a dual role in improving the walkability and thermal comfort scores. Furthermore,  
593 including additional parameters such as building material and color, besides analyzing the  
594 effect of adding vegetation and comparing the pavement material on thermal comfort, could  
595 be other interesting perspectives on the dual role factors for future research.

596 It is worthy to note the possibility of improving all the pedestrian comfort indicators  
597 by considering the standard guidelines (See Appendix A) and following the same method of  
598 Asadi-Shekari et al.(2019) (See Appendix B).Using the SWTCI method would help  
599 authorities improve comfort walkability conditions on the street level and enhance citizens'  
600 comfort potential. This design model can transform uncomfortable streets into pleasant and  
601 convenient environments within different street morphology and length. Indeed, the selected  
602 streets have fulfilled these requirements, proving the SWTCI high prospective and reliable  
603 applicability.

604

605

#### 606        **4. Conclusion**

607            This paper explored a new assessment model, the SWTCI within Csa. By considering  
608        PETas a comfort walkability indicator. This method is an innovative approach to combining  
609        pedestrian comfort facilities and thermal comfort on the street scale. The current process  
610        involved using a questionnaire survey, observations and in situ measurements. Using Envi-  
611        met and Rayman allowed obtaining current PET besides identifying the thermal comfort  
612        range. Thus, the SWTCI met the recent walkability audit tool (PLOS) and the successful  
613        thermal comfort approaches.

614            Urban designers and architects can use this model to improve comfort walkability  
615        conditions for all street morphology. Moreover, it is helpful to evaluate the existing sidewalk  
616        condition by following an easy process assessment. Applying this model can improve the  
617        existing street features and transform the streets into ideal comfortable pedestrian  
618        environments. This promising initiative can be part of a sustainable development process and  
619        healthy living strategies. The SWTCI could be explored in the Mediterranean area and other  
620        climate zones.

621            Despite the novelty of the proposed method, there are some limitations, such as using  
622        the fisheye technique to facilitate the quantitative interpretation of results, the absence of  
623        some comfort indicators (e.g., drinking fountains, tactile pavements, elevators next to a sky-  
624        bridge) considering their rareness in the selected area, besides the lack of building's  
625        characteristics (e.g., materials, colors). Thus, combining these factors in people's perceptions  
626        and analyzing the vegetation and footpath material effects on thermal comfort could be an  
627        added value for the SWTCI. Moreover, improving the SWTCI tool for each type of street,  
628        besides comparing different cities with different climates, could be an interesting topic for

629 future research. In addition, further studies can use similar methodologies to develop user-  
630 friendly software for the SWTCI estimation.

### 631 **Acknowledgements**

632 I wish to thank all of those who have supported my research for their helpful  
633 comments during its accomplishment. In particular, I would like to acknowledge the Local  
634 Environment Management and Analysis (LEMA) group at the University of Liege. The  
635 funding for this project was made possible through a research grant obtained from the  
636 Ministry of Higher Education and Scientific Research Algeria under the Programme National  
637 Exceptional (PNE).

638

639

640

641

642

643

644

645

646

647

648

649

- 651 Acero, J.A., Herranz-Pascual, K., 2015. A comparison of thermal comfort conditions in four  
 652 urban spaces by means of measurements and modelling techniques. *Building and*  
 653 *Environment* 93, 245–257. <https://doi.org/10.1016/j.buildenv.2015.06.028>
- 654 Aghaabbasi, M., Moeinaddini, M., Asadi-Shekari, Z., Shah, M.Z., 2019. The equitable use  
 655 concept in sidewalk design. *Cities* 88, 181–190.  
 656 <https://doi.org/10.1016/j.cities.2018.10.010>
- 657 Aghaabbasi, M., Moeinaddini, M., Zaly Shah, M., Asadi-Shekari, Z., 2017. A new assessment  
 658 model to evaluate the microscale sidewalk design factors at the neighbourhood level.  
 659 *Journal of Transport & Health* 5, 97–112. <https://doi.org/10.1016/j.jth.2016.08.012>
- 660 Aghaabbasi, M., Moeinaddini, M., Zaly Shah, M., Asadi-Shekari, Z., Arjomand Kermani, M.,  
 661 2018. Evaluating the capability of walkability audit tools for assessing sidewalks.  
 662 *Sustainable Cities and Society* 37, 475–484. <https://doi.org/10.1016/j.scs.2017.12.001>
- 663 Ali-Toudert, F., Mayer, H., 2007. Thermal comfort in an east–west oriented street canyon in  
 664 Freiburg (Germany) under hot summer conditions. *Theor. Appl. Climatol.* 87, 223–  
 665 237. <https://doi.org/10.1007/s00704-005-0194-4>
- 666 Ali-Toudert, F., Mayer, H., 2006. Numerical study on the effects of aspect ratio and  
 667 orientation of an urban street canyon on outdoor thermal comfort in hot and dry  
 668 climate. *Building and Environment* 41, 94–108.  
 669 <https://doi.org/10.1016/j.buildenv.2005.01.013>
- 670 Andrade, H., Alcoforado, M.-J., Oliveira, S., 2011. Perception of temperature and wind by  
 671 users of public outdoor spaces: relationships with weather parameters and personal  
 672 characteristics. *Int J Biometeorol* 55, 665–680. [https://doi.org/10.1007/s00484-010-](https://doi.org/10.1007/s00484-010-0379-0)  
 673 [0379-0](https://doi.org/10.1007/s00484-010-0379-0)
- 674 Andreou, E., 2013. Thermal comfort in outdoor spaces and urban canyon microclimate.  
 675 *Renewable Energy* 55, 182–188. <https://doi.org/10.1016/j.renene.2012.12.040>
- 676 Asadi-Shekari, Z., Moeinaddini, M., Aghaabbasi, M., Cools, M., Zaly Shah, M., 2019.  
 677 Exploring effective micro-level items for evaluating inclusive walking facilities on  
 678 urban streets (applied in Johor Bahru, Malaysia). *Sustainable Cities and Society* 49,  
 679 101563. <https://doi.org/10.1016/j.scs.2019.101563>
- 680 Asadi-Shekari, Z., Moeinaddini, M., Zaly Shah, M., 2015. Pedestrian safety index for  
 681 evaluating street facilities in urban areas. *Safety Science* 74, 1–14.  
 682 <https://doi.org/10.1016/j.ssci.2014.11.014>
- 683 Asadi-Shekari, Z., Moeinaddini, M., Zaly Shah, M., 2014. A pedestrian level of service  
 684 method for evaluating and promoting walking facilities on campus streets. *Land Use*  
 685 *Policy* 38, 175–193. <https://doi.org/10.1016/j.landusepol.2013.11.007>
- 686 Asadi-Shekari, Z., Moeinaddini, M., Zaly Shah, M., 2013a. Non-motorised Level of Service:  
 687 Addressing Challenges in Pedestrian and Bicycle Level of Service. *Transport Reviews*  
 688 33, 166–194. <https://doi.org/10.1080/01441647.2013.775613>
- 689 Asadi-Shekari, Z., Moeinaddini, M., Zaly Shah, M., 2013b. Disabled Pedestrian Level of  
 690 Service Method for Evaluating and Promoting Inclusive Walking Facilities on Urban  
 691 Streets. *J. Transp. Eng.* 139, 181–192. [https://doi.org/10.1061/\(ASCE\)TE.1943-](https://doi.org/10.1061/(ASCE)TE.1943-5436.0000492)  
 692 [5436.0000492](https://doi.org/10.1061/(ASCE)TE.1943-5436.0000492)
- 693 ASHRAE Standard, 2004. American Society of Heating, Refrigerating and Air-Conditioning  
 694 Engineers 55.
- 695 Battista, G.A., Manaugh, K., 2018. Stores and mores: Toward socializing walkability. *Journal*  
 696 *of Transport Geography* 67, 53–60. <https://doi.org/10.1016/j.jtrangeo.2018.01.004>
- 697 Boisseau, M.J., 1999. Sidewalk accessibility: A study of the continuing needs of pedestrians  
 698 applied to the sidewalk planning and design process.

699 Bowler, D.E., Buyung-Ali, L., Knight, T.M., Pullin, A.S., 2010. Urban greening to cool towns  
700 and cities: A systematic review of the empirical evidence. *Landscape and Urban*  
701 *Planning* 97, 147–155. <https://doi.org/10.1016/j.landurbplan.2010.05.006>

702 Bruse, M., Fleer, H., 1998. Simulating surface–plant–air interactions inside urban  
703 environments with a three dimensional numerical model. *Environmental Modelling &*  
704 *Software* 13, 373–384. [https://doi.org/10.1016/S1364-8152\(98\)00042-5](https://doi.org/10.1016/S1364-8152(98)00042-5)

705 Cain, K.L., Millstein, R.A., Sallis, J.F., Conway, T.L., Gavand, K.A., Frank, L.D., Saelens,  
706 B.E., Geremia, C.M., Chapman, J., Adams, M.A., Glanz, K., King, A.C., 2014.  
707 Contribution of streetscape audits to explanation of physical activity in four age  
708 groups based on the Microscale Audit of Pedestrian Streetscapes (MAPS). *Social*  
709 *Science & Medicine* 116, 82–92. <https://doi.org/10.1016/j.socscimed.2014.06.042>

710 Centre, E.C.-J.R., n.d. The Future of Cities [WWW Document]. European Commission. URL  
711 <https://urban.jrc.ec.europa.eu/thefutureofcities/> (accessed 4.13.21).

712 Charalampopoulos, I., Tsiros, I., Chronopoulou-Sereli, A., Matzarakis, A., 2013. Analysis of  
713 thermal bioclimate in various urban configurations in Athens, Greece. *Urban Ecosyst*  
714 16, 217–233. <https://doi.org/10.1007/s11252-012-0252-5>

715 Chen, L., Ng, E., 2013. Simulation of the effect of downtown greenery on thermal comfort in  
716 subtropical climate using PET index: a case study in Hong Kong. *Architectural*  
717 *Science Review* 56, 297–305. <https://doi.org/10.1080/00038628.2012.684871>

718 Christopoulou, P., Pitsiava-Latinopoulou, M., 2012. Development of a Model for the  
719 Estimation of Pedestrian Level of Service in Greek Urban Areas. *Procedia - Social and*  
720 *Behavioral Sciences* 48, 1691–1701. <https://doi.org/10.1016/j.sbspro.2012.06.1144>

721 Clifton, K.J., Livi Smith, A.D., Rodriguez, D., 2007. The development and testing of an audit  
722 for the pedestrian environment. *Landscape and Urban Planning* 80, 95–110.  
723 <https://doi.org/10.1016/j.landurbplan.2006.06.008>

724 Cohen, P., Potchter, O., Matzarakis, A., 2013. Human thermal perception of Coastal  
725 Mediterranean outdoor urban environments. *Applied Geography* 37, 1–10.  
726 <https://doi.org/10.1016/j.apgeog.2012.11.001>

727 Crews, D.E., Zavotka, S., 2006. Aging, Disability, and Frailty: Implications for Universal  
728 Design. *Journal of PHYSIOLOGICAL ANTHROPOLOGY* 25, 113–118.  
729 <https://doi.org/10.2114/jpa2.25.113>

730 Diogenes, M.C., Lindau, L.A., 2010. Evaluation of Pedestrian Safety at Midblock Crossings,  
731 Porto Alegre, Brazil. *Transportation Research Record* 2193, 37–43.  
732 <https://doi.org/10.3141/2193-05>

733 Donovan, G.H., Butry, D.T., 2009. The value of shade: Estimating the effect of urban trees on  
734 summertime electricity use. *Energy and Buildings* 41, 662–668.  
735 <https://doi.org/10.1016/j.enbuild.2009.01.002>

736 Ellen Vanderslice, O. of T., 1998. *The Portland Pedestrian Design Guide*.

737 Elnabawi, M.H., Hamza, N., Dudek, S., 2016. Thermal perception of outdoor urban spaces in  
738 the hot arid region of Cairo, Egypt. *Sustainable Cities and Society* 22, 136–145.  
739 <https://doi.org/10.1016/j.scs.2016.02.005>

740 Elnabawi, M.H., Hamza, N., Dudek, S., 2013. Use and evaluation of the ENVI-met model for  
741 two different urban forms in Cairo, Egypt: measurements and model simulations.  
742 Presented at the 13th Conference of International Building Performance Simulation  
743 Association, Chambéry, France.

744 Fruin, J.J., 1971. *Pedestrian planning and design*.

745 Galanis, A., Eliou, N., 2011. Evaluation of the pedestrian infrastructure using walkability  
746 indicators. *WSEAS Transactions on Environment and Development* 7, 385–394.

747 Gehl, J., Kaefer, L.J., Reigstad, S., 2006. Close encounters with buildings. *Urban Des Int* 11,  
748 29–47. <https://doi.org/10.1057/palgrave.udi.9000162>

749 Gillner, S., Vogt, J., Tharang, A., Dettmann, S., Roloff, A., 2015. Role of street trees in  
750 mitigating effects of heat and drought at highly sealed urban sites. *Landscape and*  
751 *Urban Planning* 143, 33–42. <https://doi.org/10.1016/j.landurbplan.2015.06.005>

752 Givoni, B., Noguchi, M., Saaroni, H., Pochter, O., Yaacov, Y., Feller, N., 2003. Outdoor  
753 comfort research issues. *Energy and Buildings* 1, 77–86.

754 Gulyás, Á., Unger, J., Matzarakis, A., 2006. Assessment of the microclimatic and human  
755 comfort conditions in a complex urban environment: Modelling and measurements.  
756 *Building and Environment* 41, 1713–1722.  
757 <https://doi.org/10.1016/j.buildenv.2005.07.001>

758 Gunn, L.D., King, T.L., Mavoia, S., Lamb, K.E., Giles-Corti, B., Kavanagh, A., 2017.  
759 Identifying destination distances that support walking trips in local neighborhoods.  
760 *Journal of Transport & Health* 5, 133–141. <https://doi.org/10.1016/j.jth.2016.08.009>

761 Huang, T., Li, J., Xie, Y., Niu, J., Mak, C.M., 2017. Simultaneous environmental parameter  
762 monitoring and human subject survey regarding outdoor thermal comfort and its  
763 modelling. *BUILD & ENVIRON.* 125, 502–514.  
764 <https://doi.org/10.1016/j.buildenv.2017.09.015>

765 Jacobs, A.B., 1993. Great streets. *ACCESS Magazine* 1, 23–27.

766 Jaskiewicz, F., 2000. PEDESTRIAN LEVEL OF SERVICE BASED ON TRIP QUALITY,  
767 in: *Transportation Research Circular*. Presented at the Urban Street  
768 Symposium Transportation Research Board; American Association of State Highway  
769 and Transportation Officials; American Society of Civil Engineers; Federal Highway  
770 Administration; Institute of Transportation Engineers; and National Association of  
771 County Engineers.

772 Jendritzky, G, de Dear, R, Havenith, G, 2012. UTCI why another thermal index? *International*  
773 *Journal of Biometeorology* 3, 421–428.

774 Jensen, S.U., 2007. Pedestrian and Bicyclist Level of Service on Roadway Segments.  
775 *Transportation Research Record* 2031, 43–51. <https://doi.org/10.3141/2031-06>

776 Johansson, E., Thorsson, S., Emmanuel, R., Krüger, E., 2014. Instruments and methods in  
777 outdoor thermal comfort studies – The need for standardization. *Urban Climate* 10,  
778 346–366. <https://doi.org/10.1016/j.uclim.2013.12.002>

779 Johnson, R.S., 2005. Pedestrian Safety Impacts of Curb Extensions: A Case Study.

780 Kang, L., Xiong, Y., Mannering, F.L., 2013. Statistical analysis of pedestrian perceptions of  
781 sidewalk level of service in the presence of bicycles. *Transportation Research Part A:*  
782 *Policy and Practice* 53, 10–21. <https://doi.org/10.1016/j.tra.2013.05.002>

783 Kántor, N., Égerházi, L., Unger, J., 2012. Subjective estimation of thermal environment in  
784 recreational urban spaces—Part 1: investigations in Szeged, Hungary. *Int J*  
785 *Biometeorol* 56, 1075–1088. <https://doi.org/10.1007/s00484-012-0523-0>

786 Kelly, C.E., Tight, M.R., Hodgson, F.C., Page, M.W., 2011. A comparison of three methods  
787 for assessing the walkability of the pedestrian environment. *Journal of Transport*  
788 *Geography* 19, 1500–1508. <https://doi.org/10.1016/j.jtrangeo.2010.08.001>

789 Kihl, M., Brennan, D., Gabhawala, N., List, J., Mittal, P., 2005. *Livable communities: An*  
790 *evaluation guide*. Washington, DC: AARP Public Policy Institute.

791 Kim, S., Park, S., Lee, J.S., 2014. Meso- or micro-scale? Environmental factors influencing  
792 pedestrian satisfaction. *Transportation Research Part D: Transport and Environment*  
793 30, 10–20. <https://doi.org/10.1016/j.trd.2014.05.005>

794 King, M.J., Soole, D., Ghafourian, A., 2009. Illegal pedestrian crossing at signalised  
795 intersections: Incidence and relative risk. *Accident Analysis & Prevention* 41, 485–  
796 490. <https://doi.org/10.1016/j.aap.2009.01.008>

797 Klemm, W., Heusinkveld, B.G., Lenzholzer, S., Jacobs, M.H., Van Hove, B., 2015.  
798 Psychological and physical impact of urban green spaces on outdoor thermal comfort



799 during summertime in The Netherlands. *Building and Environment* 83, 120–128.  
800 <https://doi.org/10.1016/j.buildenv.2014.05.013>

801 Knez, I., Thorsson, S., 2006. Influences of culture and environmental attitude on thermal,  
802 emotional and perceptual evaluations of a public square. *Int J Biometeorol* 50, 258–  
803 268. <https://doi.org/10.1007/s00484-006-0024-0>

804 Koh, P.P., Wong, Y.D., 2013. Comparing pedestrians' needs and behaviours in different land  
805 use environments. *Journal of Transport Geography* 26, 43–50.  
806 <https://doi.org/10.1016/j.jtrangeo.2012.08.012>

807 Köppen, W., 2020. *Die klimate der erde: Grundriss der klimakunde*. Walter de Gruyter GmbH  
808 & Co KG.

809 Labdaoui, K., Mazouz, S., Acidi, A., Cools, M., Moeinaddini, M., Teller, J., 2021. Utilizing  
810 thermal comfort and walking facilities to propose a comfort walkability index (CWI)  
811 at the neighbourhood level. *Building and Environment* 193, 107627.  
812 <https://doi.org/10.1016/j.buildenv.2021.107627>

813 Lai, D., Guo, D., Hou, Y., Lin, C., Chen, Q., 2014. Studies of outdoor thermal comfort in  
814 northern China. *Building and Environment* 77, 110–118.  
815 <https://doi.org/10.1016/j.buildenv.2014.03.026>

816 Lamour, Q., Morelli, A.M., Marins, K.R. de C., 2019. Improving walkability in a TOD  
817 context: Spatial strategies that enhance walking in the Belém neighbourhood, in São  
818 Paulo, Brazil. *Case Studies on Transport Policy* 7, 280–292.  
819 <https://doi.org/10.1016/j.cstp.2019.03.005>

820 Landis, B.W., Vattikuti, V.R., Ottenberg, R.M., McLeod, D.S., Guttenplan, M., 2001.  
821 *Modeling the Roadside Walking Environment: Pedestrian Level of Service*.  
822 *Transportation Research Record* 1773, 82–88. <https://doi.org/10.3141/1773-10>

823 Lee, H., Holst, J., Mayer, H., 2013. Modification of Human-Biometeorologically Significant  
824 Radiant Flux Densities by Shading as Local Method to Mitigate Heat Stress in  
825 Summer within Urban Street Canyons. *Advances in Meteorology* 2013, 1–13.  
826 <https://doi.org/10.1155/2013/312572>

827 Lee, H., Mayer, H., 2015. Green coverage changes within an ESE-WNW street canyon as a  
828 planning measure to maintain human thermal comfort on a heat wave day.

829 Lee, H., Mayer, H., Chen, L., 2016. Contribution of trees and grasslands to the mitigation of  
830 human heat stress in a residential district of Freiburg, Southwest Germany. *Landscape*  
831 *and Urban Planning* 148, 37–50. <https://doi.org/10.1016/j.landurbplan.2015.12.004>

832 Lee, Kim, 2019. Shared Space and Pedestrian Safety: Empirical Evidence from Pedestrian  
833 Priority Street Projects in Seoul, Korea. *Sustainability* 11, 4645.  
834 <https://doi.org/10.3390/su11174645>

835 Lee, L.S.H., Cheung, P.K., Fung, C.K.W., Jim, C.Y., 2020. Improving street walkability:  
836 Biometeorological assessment of artificial-partial shade structures in summer sunny  
837 conditions. *Int J Biometeorol* 64, 547–560. [https://doi.org/10.1007/s00484-019-01840-](https://doi.org/10.1007/s00484-019-01840-9)  
838 9

839 Lin, T.-P., Matzarakis, A., 2008. Tourism climate and thermal comfort in Sun Moon Lake,  
840 Taiwan. *Int J Biometeorol* 52, 281–290. <https://doi.org/10.1007/s00484-007-0122-7>

841 Lin, T.-P., Tsai, K.-T., Liao, C.-C., Huang, Y.-C., 2013. Effects of thermal comfort and  
842 adaptation on park attendance regarding different shading levels and activity types.  
843 *Building and Environment* 59, 599–611.  
844 <https://doi.org/10.1016/j.buildenv.2012.10.005>

845 Liu, W., Zhang, Y., Deng, Q., 2016. The effects of urban microclimate on outdoor thermal  
846 sensation and neutral temperature in hot-summer and cold-winter climate. *Energy and*  
847 *Buildings* 128, 190–197. <https://doi.org/10.1016/j.enbuild.2016.06.086>

- 848 Lobaccaro, G., Acero, J.A., 2015. Comparative analysis of green actions to improve outdoor  
849 thermal comfort inside typical urban street canyons. *Urban Climate* 14, 251–267.  
850 <https://doi.org/10.1016/j.uclim.2015.10.002>
- 851 Loukaitou-Sideris, A., 2006. Is it Safe to Walk? 1 Neighborhood Safety and Security  
852 Considerations and Their Effects on Walking. *Journal of Planning Literature* 20, 219–  
853 232. <https://doi.org/10.1177/0885412205282770>
- 854 Manual, H.C., 2000. Highway capacity manual. Washington, DC 2, 1.
- 855 Marcus, C.C., Francis, C., 1997. People places: design guidelines for urban open space. John  
856 Wiley & Sons.
- 857 Mateo-Babiano, I., 2016. Pedestrian's needs matter: Examining Manila's walking  
858 environment. *Transport Policy* 45, 107–115.  
859 <https://doi.org/10.1016/j.tranpol.2015.09.008>
- 860 Matzarakis, A., Mayer, H., Iziomon, M.G., 1999. Applications of a universal thermal index:  
861 physiological equivalent temperature. *International Journal of Biometeorology* 43, 76–  
862 84. <https://doi.org/10.1007/s004840050119>
- 863 Matzarakis, A., Rutz, F., Mayer, H., 2010. Modelling radiation fluxes in simple and complex  
864 environments: basics of the RayMan model. *Int J Biometeorol* 54, 131–139.  
865 <https://doi.org/10.1007/s00484-009-0261-0>
- 866 Matzarakis, A., Rutz, F., Mayer, H., 2007. Modelling radiation fluxes in simple and complex  
867 environments—application of the RayMan model. *Int J Biometeorol* 51, 323–334.  
868 <https://doi.org/10.1007/s00484-006-0061-8>
- 869 Mayer, H., 1993. Urban bioclimatology. *Experientia* 49, 957–963.  
870 <https://doi.org/10.1007/BF02125642>
- 871 Mayer, H., Höpfe, P., 1987. Thermal comfort of man in different urban environments. *Theor*  
872 *Appl Climatol* 38, 43–49. <https://doi.org/10.1007/BF00866252>
- 873 Miller, J.S., Bigelow, J.A., Garber, N.J., 2000. Calibrating Pedestrian Level-of-Service  
874 Metrics with 3-D Visualization. *Transportation Research Record* 1705, 9–15.  
875 <https://doi.org/10.3141/1705-02>
- 876 Moeinaddini, M., Asadi-Shekari, Z., Ismail, C.R., Zaly Shah, M., 2013. A practical method  
877 for evaluating parking area level of service. *Land Use Policy* 33, 1–10.  
878 <https://doi.org/10.1016/j.landusepol.2012.11.014>
- 879 Moeinaddini, M., Asadi-Shekari, Z., Zaly Shah, M., 2015. An urban mobility index for  
880 evaluating and reducing private motorized trips. *Measurement* 63, 30–40.  
881 <https://doi.org/10.1016/j.measurement.2014.11.026>
- 882 Morakinyo, T.E., Kong, L., Lau, K.K.-L., Yuan, C., Ng, E., 2017. A study on the impact of  
883 shadow-cast and tree species on in-canyon and neighborhood's thermal comfort.  
884 *Building and Environment* 115, 1–17. <https://doi.org/10.1016/j.buildenv.2017.01.005>
- 885 Moura, F., Cambra, P., Gonçalves, A.B., 2017. Measuring walkability for distinct pedestrian  
886 groups with a participatory assessment method: A case study in Lisbon. *Landscape*  
887 *and Urban Planning* 157, 282–296. <https://doi.org/10.1016/j.landurbplan.2016.07.002>
- 888 Mullaney, J., Lucke, T., Trueman, S.J., 2015. A review of benefits and challenges in growing  
889 street trees in paved urban environments. *Landscape and Urban Planning* 134, 157–  
890 166. <https://doi.org/10.1016/j.landurbplan.2014.10.013>
- 891 Müller, N., Kuttler, W., Barlag, A.-B., 2014. Counteracting urban climate change: adaptation  
892 measures and their effect on thermal comfort. *Theor Appl Climatol* 115, 243–257.  
893 <https://doi.org/10.1007/s00704-013-0890-4>
- 894 Nikolopoulou, M., Baker, N., Steemers, K., 2001. Thermal comfort in outdoor urban spaces:  
895 understanding the human parameter. *Solar Energy* 70, 227–235.  
896 [https://doi.org/10.1016/S0038-092X\(00\)00093-1](https://doi.org/10.1016/S0038-092X(00)00093-1)

- 897 Nikolopoulou, M., Lykoudis, S., 2006. Thermal comfort in outdoor urban spaces: Analysis  
898 across different European countries. *Building and Environment* 41, 1455–1470.  
899 <https://doi.org/10.1016/j.buildenv.2005.05.031>
- 900 Nilles, M., Kaparias, I., 2018. Investigating the relation of highway design standards with  
901 network-level walkability: The case study of Luxembourg. *International Journal of*  
902 *Transportation Science and Technology* 7, 254–263.  
903 <https://doi.org/10.1016/j.ijtst.2018.08.001>
- 904 Oke, T.R., 1982. The energetic basis of the urban heat island. *Q.J Royal Met. Soc.* 108, 1–24.  
905 <https://doi.org/10.1002/qj.49710845502>
- 906 Potchter, O., Cohen, P., Lin, T.-P., Matzarakis, A., 2018. Outdoor human thermal perception  
907 in various climates: A comprehensive review of approaches, methods and  
908 quantification. *Science of The Total Environment* 631–632, 390–406.  
909 <https://doi.org/10.1016/j.scitotenv.2018.02.276>
- 910 Retting, R.A., Ferguson, S.A., McCartt, A.T., 2003. A Review of Evidence-Based Traffic  
911 Engineering Measures Designed to Reduce Pedestrian–Motor Vehicle Crashes. *Am J*  
912 *Public Health* 93, 1456–1463.
- 913 Rodríguez, D.A., Aytur, S., Forsyth, A., Oakes, J.M., Clifton, K.J., 2008. Relation of  
914 modifiable neighborhood attributes to walking. *Preventive Medicine* 47, 260–264.  
915 <https://doi.org/10.1016/j.ypmed.2008.02.028>
- 916 Ruiz-Padillo, A., Pasqual, F.M., Larranaga Uriarte, A.M., Cybis, H.B.B., 2018. Application of  
917 multi-criteria decision analysis methods for assessing walkability: A case study in  
918 Porto Alegre, Brazil. *Transportation Research Part D: Transport and Environment* 63,  
919 855–871. <https://doi.org/10.1016/j.trd.2018.07.016>
- 920 Sahani, R., Bhuyan, P.K., 2014. PEDESTRIAN LEVEL OF SERVICE CRITERIA FOR  
921 URBAN OFF-STREET FACILITIES IN MID-SIZED CITIES. *Transport* 32, 221–  
922 232. <https://doi.org/10.3846/16484142.2014.944210>
- 923 Salata, F., Golasi, I., de Lieto Vollaro, R., de Lieto Vollaro, A., 2016. Outdoor thermal  
924 comfort in the Mediterranean area. A transversal study in Rome, Italy. *Building and*  
925 *Environment* 96, 46–61. <https://doi.org/10.1016/j.buildenv.2015.11.023>
- 926 Sarkar S., 1993. DETERMINATION OF SERVICE LEVELS FOR PEDESTRIANS, WITH  
927 EUROPEAN EXAMPLES.
- 928 Sousa, M., Montalto, F., Palmer, M., 2016. Potential climate change impacts on green  
929 infrastructure vegetation. *Urban Forestry & Urban Greening* 20.  
930 <https://doi.org/10.1016/j.ufug.2016.08.014>
- 931 Southworth, M., 2005. Designing the Walkable City. *J. Urban Plann. Dev.* 131, 246–257.  
932 [https://doi.org/10.1061/\(ASCE\)0733-9488\(2005\)131:4\(246\)](https://doi.org/10.1061/(ASCE)0733-9488(2005)131:4(246))
- 933 Synnefa, A., Santamouris, M., Livada, I., 2006. A study of the thermal performance of  
934 reflective coatings for the urban environment. *Solar Energy* 80, 968–981.  
935 <https://doi.org/10.1016/j.solener.2005.08.005>
- 936 Taleai, M., Taheri Amiri, E., 2017. Spatial multi-criteria and multi-scale evaluation of  
937 walkability potential at street segment level: A case study of tehran. *Sustainable Cities*  
938 *and Society* 31, 37–50. <https://doi.org/10.1016/j.scs.2017.02.011>
- 939 Taleghani, M., Berardi, U., 2018. The effect of pavement characteristics on pedestrians'  
940 thermal comfort in Toronto. *Urban Climate* 24, 449–459.  
941 <https://doi.org/10.1016/j.uclim.2017.05.007>
- 942 Tan, D., Wang, W., Lu, J., Bian, Y., 2007. Research on Methods of Assessing Pedestrian  
943 Level of Service for Sidewalk. *Journal of Transportation Systems Engineering and*  
944 *Information Technology* 7, 74–79. [https://doi.org/10.1016/S1570-6672\(07\)60041-5](https://doi.org/10.1016/S1570-6672(07)60041-5)

- 945 Tan, Z., Lau, K.K.-L., Ng, E., 2016. Urban tree design approaches for mitigating daytime  
946 urban heat island effects in a high-density urban environment. *Energy and Buildings*  
947 114, 265–274. <https://doi.org/10.1016/j.enbuild.2015.06.031>
- 948 Thorsson, S., Honjo, T., Lindberg, F., Eliasson, I., Lim, E.-M., 2007. Thermal Comfort and  
949 Outdoor Activity in Japanese Urban Public Places. *Environment and Behavior* 39,  
950 660–684. <https://doi.org/10.1177/0013916506294937>
- 951 Todorova, A., Asakawa, S., Aikoh, T., 2004. Preferences for and attitudes towards street  
952 flowers and trees in Sapporo, Japan. *Landscape and Urban Planning* 69, 403–416.  
953 <https://doi.org/10.1016/j.landurbplan.2003.11.001>
- 954 Troped, P.J., Cromley, E.K., Fragala, M.S., Melly, S.J., Hasbrouck, H.H., Gortmaker, S.L.,  
955 Brownson, R.C., 2006. Development and Reliability and Validity Testing of an Audit  
956 Tool for Trail/Path Characteristics: The Path Environment Audit Tool (PEAT).  
957 *Journal of Physical Activity and Health* 3, S158–S175.  
958 <https://doi.org/10.1123/jpah.3.s1.s158>
- 959 Tseliou, A., Tsiros, I.X., Lykoudis, S., Nikolopoulou, M., 2010. An evaluation of three  
960 biometeorological indices for human thermal comfort in urban outdoor areas under  
961 real climatic conditions. *Building and Environment* 45, 1346–1352.  
962 <https://doi.org/10.1016/j.buildenv.2009.11.009>
- 963 VDI, V., 1998. 3787, Part I: Environmental Meteorology, Methods for the Human  
964 Biometeorological Evaluation of Climate and Air Quality for the Urban and Regional  
965 Planning at Regional Level. Part I: Climate. Part I: Climate. Beuth, Berlin.
- 966 Watanabe, S., Nagano, K., Ishii, J., Horikoshi, T., 2014. Evaluation of outdoor thermal  
967 comfort in sunlight, building shade, and pergola shade during summer in a humid  
968 subtropical region. *Building and Environment* 82, 556–565.  
969 <https://doi.org/10.1016/j.buildenv.2014.10.002>
- 970 Wu, Z., Chen, L., 2017. Optimizing the spatial arrangement of trees in residential  
971 neighborhoods for better cooling effects: Integrating modeling with in-situ  
972 measurements. *Landscape and Urban Planning* 167, 463–472.  
973 <https://doi.org/10.1016/j.landurbplan.2017.07.015>

974

975

976

977

978

979

980

981

982

Pedestrian comfort facilities	Standards
Slower traffic speed	30km /H based on the street standard.
Buffer and barriers (curb and furnishing zone)	<ul style="list-style-type: none"> <li>✓ Curb standard: the lowest width of curb is equal to 0.15m, the minimal high is equivalent to 0.10-0.15m</li> <li>✓ Furnishing zone: the lowest acceptable width is 1.2m; however, the Interval (1.8m-2.4m) is recommended.</li> </ul>
Fewer traffic lanes,	✓ Standard 2 lanes.
Mid-block crossing	<ul style="list-style-type: none"> <li>✓ 1. Crosswalk number is changing, but not farther apart 60-90m, besides not contiguous than 45m and does not ban crossing further than 120m.</li> <li>✓ 2. The representative width of the mid-block crossing is 3 m. However, if the sidewalk is more extended than 3.7 m, the crosswalk should be larger than the width.</li> </ul>
Landscape and trees	<ul style="list-style-type: none"> <li>✓ Trees Limb must have a clear vertical high of a minimum of 2.4 m (1)</li> <li>✓ Trees must be distant from intersections with a minimum of 7.6 m (2)</li> <li>✓ Trees interval must not exceed 9 m to ensure an extended trees canopy.</li> <li>✓ Trees must be implanted on both sides of the sidewalk</li> </ul>
Furniture (trash receptacles)	<ul style="list-style-type: none"> <li>✓ It must be in the furnishing zone within 0.9 m wide or more extensive.</li> <li>✓ It must be far from the intersection with 9m of distance.</li> <li>✓ A distance of 0.6m, at least from the curb border, should be respected.</li> <li>✓ One receptacle should be provided in each playground, which has to be near benches.</li> <li>✓ It must have at least 1.2 m clear out concerning bus facilities.</li> <li>✓ It must be placed every 200-400 m.</li> </ul>
Footpath pavement	<ul style="list-style-type: none"> <li>✓ It must be solid, anti-slip, not rough, and extended.</li> <li>✓ The area of discontinuities should not be more than 1.25 cm; besides, the thickness differences must be including 0.6-1.25</li> </ul>
Marking (crosswalk)	<p>The first type (Ladder or longitudinal)</p> <ul style="list-style-type: none"> <li>✓ The minimal width of a crosswalk is 3 m, but the suggested width is 5 m</li> <li>✓ The strips interval is 0.3-1.5 m</li> <li>✓ The width of the bands is between 0.3-0.6m</li> </ul> <p>The second type (Parallel or standard transverse)</p> <ul style="list-style-type: none"> <li>✓ The minimal crosswalk width is 1.9m, but the suggested width is between 3-4.5 m</li> <li>✓ The width of the two bands is 0.15-0.30m</li> </ul>
Sidewalk on bothsides	✓ Every side of the street must have a sidewalk.
Width of footpath	The footpath zone must be at least 1.5 m. However, the preferred width is between 1.8m-2.4m
Slope	The sidewalk slope $\leq 2\%$
Lighting	<ul style="list-style-type: none"> <li>✓ Sufficient light must be furnished.</li> <li>✓ The pedestrian dimension is relevant for providing lighting.</li> <li>✓ The light pole must be based at least 0.9 m from the curb beside any other approachable structure (e.g., shelter).</li> <li>✓ The lighting fixtures with full-cut off must provide a descended light in the streets.</li> </ul> <ul style="list-style-type: none"> <li>✓ The light pole interval must be 9 m maximum to ensure sufficient light.</li> </ul>

Continued Pedestrian comfort facilities	Standards
Ramp	<p>A pedestrian surface characterised by a running slope superior to 5%</p> <ul style="list-style-type: none"> <li>✓ Maximal value of the slope is 8.3%</li> <li>✓ The minimal width is 1.2m</li> <li>✓ An appropriate handrail must be furnished.</li> </ul>
Park and space for playing	<ul style="list-style-type: none"> <li>✓ Parks and the public area must be effortlessly accessible on foot or by bike for the user's categories (e.g., people with different abilities besides children and alder).</li> <li>✓ Parks and public spaces require to be safe, accessible, and age-friendly.</li> </ul>
Social space (café)	<ul style="list-style-type: none"> <li>✓ They should be located every 200-400 m</li> </ul>
Benches and seating area	<ul style="list-style-type: none"> <li>✓ They must be provided in the frontage zone.</li> <li>✓ They must be implanted with a minimal distance of 0.6m from the curb.</li> <li>✓ They must be implanted with a minimal distance of 9m from the intersection.</li> <li>✓ They must be furnished at all bus stops.</li> <li>✓ They should be implanted every 200-400 m.</li> <li>✓ An area of 1.2 m should be given at the end of the seats to allow strollers and wheelchairs station.</li> <li>✓ Every seat must be furnished with a minimal distance of 0.6 m from the pedestrian traffic roads.</li> <li>✓ A distance of 1.5 m should be respected between the seat and any immobile furniture such as a drinking fountain, trash receptacle or signpost.</li> </ul>
Toilet	<ul style="list-style-type: none"> <li>✓ The public toilet must be implanted close to the bus stop and at each Rapid Transit Station. Besides being adjoining to parks and playing area.</li> <li>✓ Toilet interval implementation must be every 500- 800m.</li> <li>✓ For wheelchair users, a minimal distance of 1.7*1.8 m should be respected.</li> </ul>
Pedestrian signal	<ul style="list-style-type: none"> <li>✓ Reachable pedestrian signals should have an interval of 3m at a crossing besides respecting a distance of 1.5 m from other signals (1)</li> <li>✓ The pedestrian signal must be implanted no closer than 0.75m and with a maximal distance of 3m from the curb (2)</li> <li>✓ It must be far less than 1.5 m from the crosswalk (3)</li> <li>✓ An appropriate countdown must be furnished (4)</li> <li>✓ People with disabilities (wheelchair user) must be able to achieve the button (5)</li> <li>✓ An audio signal is necessary (6)</li> </ul>
Shorter crossing distance(curbs extension)	<ul style="list-style-type: none"> <li>✓ Curbs extension reduces the crossing distance, furnishes an additional area to the corner, and permits pedestrians' visibility before crossing.</li> <li>✓ They should be at any mid-block crossing or marked crosswalk defined by a parking lane (where the curb could be extended).</li> <li>✓ They are the favoured elements for corner except in extenuating design consideration (e.g., turning radius of the design vehicle).</li> <li>✓ The curbs extension could comprise transit stops, which can omit buses need to pull out of the travel lane for loading and unloading pass.</li> </ul>

Facilities	scores
Slower traffic speed	$S = \begin{cases} =1 & \text{if the speed of 30km/h (pedestrian zone) is respected} \\ =0 & \text{if the of 30km/h is not mentioned and respected.} \end{cases}$
Buffer and barriers (curb and furnishing zone)	<p><math>C =</math> Number of standard curb ramps  <math>N =</math> Total number of curb ramps the street needs  <math>P = C/N</math></p> $S = \begin{cases} = 1 & \text{if } P \geq 1 \\ = P & \text{if } P < 1 \\ = 0 & \text{if the curbs are not required} \end{cases}$
Fewer traffic lanes,	$S = \begin{cases} = 0 & \text{if } N^{\circ} \text{ of lanes } > 2 \\ = 1 & \text{if } N^{\circ} \text{ of lanes } \leq 2 \end{cases}$
Mid-block crossing	<p><math>S = \begin{cases} = \sum P_i / \text{The entire number of sections with an extend over 120m} \\ = 0 &amp; \text{if, the whole extend of the street, is under 120m and } c_i = 0 \end{cases}</math></p> <p><math>P = \begin{cases} = 1 &amp; \text{if } P_{ci} \geq 1 \\ = P_{ci} &amp; \text{if } P_{ci} &lt; 1 \end{cases}</math></p> <p><math>P_{ci} = c_i / n_i</math>  <math>i = 1, 2, 3, \dots, k</math> (Various segments of streets between crossroads greater than 120m)  <math>c_i =</math> Numeral of standard mid-block crossing in segment <math>i</math>  <math>n_i =</math> extend of trees in segment/120.</p>
Landscape and trees	<p><math>D =</math> Interval of the distance between trees (m)  <math>C = \begin{cases} = (\text{Extend of a street with trees} - \text{entire extend of crossroads and their considered standard restrictions}) / D &amp; \text{If } D &gt; 9 \\ = \text{Extend of a street with trees} - \text{entire extend of crossroads and their considered standard restrictions} &amp; \text{if } D \leq 9 \end{cases}</math></p> <p><math>N =</math> Extend of the street (both sides)-entire extend of crossroads and their considered standard restrictions)  <math>P1 = C/N</math>  If <math>D</math> is varying within different segments of the street  <math>C_i = \begin{cases} = \text{Extend of a street with trees in segment } i - \text{entire extend of crossroads and their considered standard restrictions}) / D &amp; \text{If } D &gt; 9 \\ = \text{Extend of street with trees in segment } i - \text{complete distance of intersections and their considered standard restrictions} &amp; \text{if } D \leq 9 \end{cases}</math>  <math>i = 1, 2, 3, \dots, k</math> (Various segments of streets with a different interval of trees)  <math>N_i =</math> Extend of a street (in segment <math>i</math>) - considered standard restrictions (m)</p> $P1 = \sum_{i=1}^k C_i / \sum_{i=1}^k N_i$ <p><math>F = C -</math> Extend of a street that does not have a clear vertical height  <math>N =</math> Extend of the street (both sides)-entire extend of intersections and their considered standard restrictions)  <math>P2 = F/N</math>  If <math>D</math> is varying in different segments of the street.  <math>F_i = C_i -</math> Extend of a street that does not have clear vertical height in section <math>i</math>  <math>N_i =</math> Extend of the street (section <math>i</math>) - considered standard restrictions (m)</p> $P2 = \sum_{i=1}^k C_i / \sum_{i=1}^k N_i$ <p><math>NI =</math> Number of crossroads with considered standard restrictions for trees).  <math>I =</math> Number of the hole crossroads  <math>P3 = NI/I</math>  <math>S = (P1 + P2 + P3) / 3</math></p>
Furniture (trash receptacles)	<p><math>C =</math> Extend of a street with guideline trash receptacle area + their support distance (m)  <math>N =</math> Extend of street (both sides) (m)  <math>S = C/N</math></p>
Footpath pavement	<p><math>W =</math> Width of footpath (m)  <math>C =</math> Area of standard pavement (m<sup>2</sup>)  <math>N = \begin{cases} = (\text{Extend of street (both sides)} - \text{extend of crossroads}) \times 1.8 &amp; \text{if } W &lt; 1.80 \text{ m} \\ = (\text{Extend of a street (both sides)} - \text{extend of crossroads}) \times W &amp; \text{if } W \geq 1.80 \text{ m} \end{cases}</math>  <math>S = C/N</math></p> <p><b>If <math>W</math> is varying in a different segment of street</b>  <math>W_i =</math> Width of footpath in segment <math>i</math>  <math>i = 1, 2, 3, \dots, k</math> (various segments of a street with different width of the footpath)  <math>C_i =</math> Area of guideline pavement in segment <math>i</math> (m<sup>2</sup>)  <math>N_i = \begin{cases} = (\text{Extend of a street (in segment } i) \times 1.8 &amp; \text{if } W_i &lt; 1.80 \text{ m} \\ = (\text{Extend of a street (in segment } i) \times W_i &amp; \text{if } W_i \geq 1.80 \text{ m} \end{cases}</math>  <math>PC_i = C_i / N_i</math>  <math>L_i =</math> Extend of street in segment <math>i</math> (m)  <math>S = \sum_{i=1}^k PC_i \times L_i / (\text{Extend of a street (both sides)} - \text{extend of crossroads}).</math></p>

Continued Facilities	scores
Marking (crosswalk)	<p><math>C</math> = Number of guideline crosswalk markings  <math>N</math> = Number of crosswalks that street requires (mid-block and cross walk at intersections)  <math>P = C/N</math></p> $S = \begin{cases} 1 & \text{If } P \geq 1 \\ P & \text{If } P < 1 \end{cases}$
Sidewalk on bothsides	$a = \begin{cases} 1 & \text{if } P1 \geq 1 \\ P1 & \text{If } P < 1 \end{cases}$ $P1 = l1/N1$ $l1$ = Extend of sidewalk in one side (m) $N1$ = Extend of street – Extend of crossroads in one side (m) $m = \begin{cases} 1 & \text{if } P2 \geq 1 \\ P2 & \text{If } P2 < 1 \end{cases}$ $P2 = l2/N2$ $l2$ = Extend of footpath in opposite side (m) $N2$ = Extend of street – Extend of crossroads in other side (m) $S = (a + m)/2$
Width of footpath	$W$ = Width of sidewalk (m) $C$ = Area of guideline sidewalk (m <sup>2</sup> ) $N = \begin{cases} (\text{Extend of street (both sides)} - \text{extend of crossroads}) \times 1.8 & \text{if } W < 1.80 \text{ m} \\ (\text{Extend of a street (both sides)} - \text{extend of crossroads}) \times W & \text{if } W \geq 1.80 \text{ m} \end{cases}$ $S = C/N$ <p><b>If W is varying in a different segment of street</b>  <math>Wi</math> = Width of sidewalk in segment <math>i</math>  <math>i = 1, 2, 3, \dots, k</math> (various segments of street with different width of the sidewalk)  <math>Ci</math> = Area of guideline sidewalk in segment <math>i</math> (m<sup>2</sup>)  <math>Ni = \begin{cases} (\text{Extend of a street (in segment } i) \times 1.8 &amp; \text{if } Wi &lt; 1.80 \text{ m} \\ (\text{Extend of a street (in segment } i) \times Wi &amp; \text{if } Wi \geq 1.80 \text{ m} \end{cases}</math>  <math>PCi = Ci/Ni</math>  <math>Li</math> = Extend of street in segment <math>i</math> (m)  <math>S = \sum_{i=1}^k PCi \times Li / (\text{Extend of a street (both sides)} - \text{extend of crossroads}).</math> </p>
Slope	$C$ = Area of footpath with the guideline slope (m <sup>2</sup> ) $N = \begin{cases} (\text{Extend of street (both sides)} - \text{extend of crossroads}) \times 1.8 & \text{if } W < 1.80 \text{ m} \\ (\text{Extend of a street (both sides)} - \text{extend of crossroads}) \times W & \text{if } W \geq 1.80 \text{ m} \end{cases}$ $W$ = Width of the footpath (m) $S = C/N$ <p><b>If W is varying in a different segment of street</b>  <math>Wi</math> = Width of footpath in segment <math>i</math>  <math>i = 1, 2, 3, \dots, k</math> (various segments of street with different width of the sidewalk)  <math>Ci</math> = Area of the footpath with guideline slope in segment <math>i</math> (m<sup>2</sup>)  <math>Ni = \begin{cases} (\text{Extend of a street (in segment } i) \times 1.8 &amp; \text{if } Wi &lt; 1.80 \text{ m} \\ (\text{Extend of a street (in segment } i) \times Wi &amp; \text{if } Wi \geq 1.80 \text{ m} \end{cases}</math>  <math>DCi = Ci/Ni</math>  <math>Li</math> = Extend of footpath (in segment <math>i</math>) (m)  <math>S = \sum_{i=1}^k DCi \times Li / (\text{Extend of a street (both sides)} - \text{extend of crossroads}).</math> </p>
Lighting	$D$ = interval of distance between light poles (m) $C = \begin{cases} (\text{Extend of street with pedestrian lighting} - \text{entire extend of crossroads}) \times 9 / D & \text{if } D > 9\text{m} \\ \text{Extend of street with pedestrian lighting} - \text{entire extend of crossroads} & \text{if } D \leq 9\text{m}. \end{cases}$ $N = (\text{Extend of street (both sides)} - \text{crossroads extend}) (m)$ $P = C/N$ $S = \begin{cases} 1 & \text{if } P \geq 1 \\ P & \text{if } P < 1 \end{cases}$ <p><b>If D is varying in a different segment of street</b></p> $S = \frac{\sum_{i=1}^k Ci}{\sum_{i=1}^k Ni}$ $i = 1, 2, 3, \dots, k$ (various segments of street with different Interval of distances between light poles) $C = \begin{cases} (\text{Extend of street with pedestrian lighting in segment } i) \times 9 / D & \text{if } D > 9\text{m} \\ (\text{Extend of street with pedestrian lighting in segment } i) & \text{if } D \leq 9\text{m}. \end{cases}$ $Ni$ = Extend of street in segment $i$ (m)



Continued Facilities	Scores
<i>Ramp</i>	$C = \text{Number of guideline ramps}$ $N = \text{Number of ramps that street requires}$ $P = C/N$ $S = \begin{cases} = 1 & \text{if } P \geq 1 \\ = P & \text{if } P < 1 \end{cases}$ $1$ if the street does not require ramp.
<i>Park and space for playing</i>	$S = \begin{cases} = 1 & \text{If there are a park and space for playing} \\ = 0 & \text{If there is no park and space for playing} \end{cases}$
<i>Social space (café)</i>	$C = \text{Extend of a street with social spaces + their support distance (m)}$ $N = \text{Extend of a street (in both sides) (m)}$ $S = C/N$
<i>Bench and seating area</i>	$C = \text{Extend of a street with guideline seating area + their support distance (m)}$ $N = \text{Extend of a street (in both sides) (m)}$ $S = C/N$
<i>Toilet</i>	$C = \text{Extend of a street with guideline toilets + their support distance (m)}$ $N = \text{Extend of a street (m)}$ $S = C/N$
<i>Pedestrian signal</i>	$SPI = \begin{cases} = 1 & \text{if } P1 \geq 1 \\ = P1 & P1 < 1 \end{cases}$ $P1 = SP/N$ $SP = \text{Signals with first, second and third quality}$ $N = \text{Entire number of signals that street requires.}$ $CPI = \begin{cases} = 1 & \text{if } P2 \geq 1 \\ = P1 & P2 < 1 \end{cases}$ $P2 = C/N$ $C = \text{Signals with fourth quality}$ $WPI = \begin{cases} = 1 & \text{if } P3 \geq 1 \\ = P1 & P3 < 1 \end{cases}$ $P3 = W/N$ $W = \text{Signals with fifth quality}$ $AP = \begin{cases} = 1 & \text{if } P4 \geq 1 \\ = P4 & \text{if } P4 < 1 \end{cases}$ $P4 = A/N$  $A = \text{Signals with sixth quality}$ $S = (SPI + CPI + WPI + API)/4$ $S = 0$ If there is no signal
<i>Shorter crossing distance (curb extension)</i>	$P = C/N$  $C = \text{Number of guidelines curb extensions}$ $N = \text{Entire number of curb extensions that street requires}$ $S = \begin{cases} = 1 & \text{if } P \geq 1 \\ = P & \text{if } P < 1 \\ = 0 & \text{if there is no point in requiring curb extension and there is no footpath.} \end{cases}$

991

992

993

994

995

996

997

998 **Appendix C Improving scores**

999 We can improve the pedestrians' comfort condition by analyzing the existing variable's  
 1000 qualities with standards (See Table 7 and Appendices A, B). The comfort indicators could  
 1001 achieve the ideal score of 1 by performing current scores.

1002 **Example 1** Developing pedestrian facilities scores at street 1

1003 **1.1 Landscape and trees** (current score  $S=0$ , improved score  $S_1=0.62$  with trees interval  
 1004 distance of 15 m,  $S_2=1$  with trees interval distance of 9 m).

1005 Where:

$$C \begin{cases} (Extend\ of\ a\ street\ with\ trees-entire\ extend\ of\ crossroads\ and\ their\ considered\ standard\ restrictions) \times 9/D \text{ If } D > 9 \\ (Extend\ of\ a\ street\ with\ trees-entire\ extend\ of\ crossroads\ and\ their\ considered\ standard\ restrictions) / D \text{ If } D \leq 9 \end{cases}$$

$N =$  Extend of the street (both sides)-entire extend of crossroads and their considered standard restrictions)

$F = C -$  Extend of a street that does not have a clear vertical height

$NI =$  Number of crossroads with considered standard restrictions for trees).

$I =$  Number of the hole crossroads.

$P1 = C/N$

$P2 = F/N$

$P3 = NI/I$

$S = (P1 + P2 + P3) / 3$

1008 **1. D=15**

1009  $C = ((515 \times 2) - 72) \times 9 / 15 = 574.8$ ,  $N = (515 \times 2) - 72 = 958$ ,  $P1 = 574.8 / 958 = 0.60$ ,  $F = 958 - 0 = 958$ ,  
 1010  $P2 = 974.8 / 958 = 0.60$ ,  $NI = 8$ ,  $I = 12$ ,  $P3 = 8 / 12 = 0.66$ ; so,  $S_1 = (0.60 + 0.60 + 0.66) / 3 = 0.62$

1011 **2. D=9**

1012 We can have the ideal score of 1 ( $S_2=1$ ) of landscape and trees by considering the  
 1013 interval distance between trees 9m instead of 15 m, besides eliminating the standard length at  
 1014 two intersections.

1015 **1.2 Benches and seating area**

1016  $C =$  Extend of a street with guideline seating area + their support distance (m)

1017  $N =$  Extend of a street (in both sides) (m)

1018  $S = C/N$

1019 1. The minimal required distance between benches (D=200m)

1020 (C= 500+200=700, N= (515×2) =1030, S=700/1030=0.67

1021 2. It is also possible to achieve the ideal score of 1 by considering the benches' furniture

1022 along 330m (Which included 200-400 m).

1023 By improving only these two factors scores and maintaining PET scores, the SWTCI

1024 (at Street1) increases from 33% (category D) to 42% (category C). That allows a better

1025 comfort level.

1026 ***Example 2 Developing pedestrian facilities scores at Street 3***

1027 Street 3 recorded the lowest scores. However, developing some pedestrian facilities

1028 scores such as landscaping and trees, footpath pavement can enhance the scores and improve

1029 the walking experience.

1030 **2.1 Width of the footpath** (current score S= 0, improved score S1'0.83= with W=1.5 m, S2'=

1031 1 with W=2.4 m or 1.80 m).

1032 Where:

1033  $W = \text{Width of sidewalk (m)}$

1034  $C = \text{Area of guideline sidewalk (m}^2\text{)}$

1035  $N \left\{ \begin{array}{l} = (\text{Extend of street (both sides) - extend of crossroads}) 1.8 \text{ if } W < 1.80 \text{ m} \\ = (\text{Extend of a street (both sides) - extend of crossroads}) W \text{ if } W \geq 1.80 \text{ m} \end{array} \right.$

1036

1037  $S = C/N$

1038 **1. W=1.50**

1039  $C = (299.68-5) \times 1.50, N = (299.68-5) \times 1.80, S = C/N, S2' = 442.02/530.42 = 0.83$

1040

1041 **2. W=2.40 m or 1.80m**

1042  $C = (299.68-5) \times 2.40$ ,  $N = (299.68-5) \times 2.40$ ,  $S = C/N$ ,  $S_2' = 707.23/707.23 = 1$ .

1043 Combining footpath pavement and width of the footpath could be an excellent choice  
1044 for enhancing the pedestrian comfort facilities scores. In this case, it is easy to enhance the  
1045 footpath pavement because it is not existing. So it is possible to reach the score (1) directly.

1046 Where

1047  $W =$  Width of footpath (m)

1048  $C =$  Area of standard pavement (m<sup>2</sup>)

1049  $N \begin{cases} = (\text{Extend of street (both sides)} - \text{extend of crossroads}) 1.8 \text{ if } W < 1.80 \text{ m} \\ = (\text{Extend of a street (both sides)} - \text{extend of crossroads}) W \text{ if } W \geq 1.80 \text{ m} \end{cases}$

1050

1051  $S = C/N$

1052 **1. W=2.40 m or 1.80m**

1053  $C = (299.68-5) \times 2.40$ ,  $N = (299.68-5) \times 2.40$ ,  $S = C/N$ ,  $S_2' = 707.23/707.23 = 1$ .

1054 However, proposing a specific type of footpath pavement material such as tiles with a  
1055 lighter is an interesting alternative to enhance thermal comfort.

1056 **2.2 Lighting** (Current score  $S = 0$ , improved score  $S_1'' = 0.64$  with  $D = 14$  m,  $S_2'' = 1$  with  
1057  $D = 9$  m).

1058 **Where:**

1059  $D =$  interval of distance between light poles (m)

1060  $C \begin{cases} = (\text{Extend of street with pedestrian lighting} - \text{entire extend of crossroads}) \times 9 / D \text{ if } D > 9 \text{ m} \\ = (\text{Extend of street with pedestrian lighting} - \text{entire extend of crossroads}) \text{ if } D \leq 9 \text{ m}. \end{cases}$

1061

1062  $N = (\text{Extend of street (both sides)} - \text{crossroads extend}) (m)$

1063  $P = C/N$

1064  $S \begin{cases} = 1 \text{ if } P \geq 1 \\ = P \text{ if } P < 1 \end{cases}$

1065

1066 **1. D=14 m**

1067  $C = (299.68 - 5 \times 9) / 14, N = (299.68 - 5), P = C/N, P = 0.63$

1068 **2.  $D = 9$**

1069  $C = (299.68 - 5 \times 9) / 9, N = (299.68 - 5), P = C/N, P = 1$

1070

1071

1072

1073

1074

1075

1076

1077

1078

1079

1080

1081

1082

1083

1084

1085

1086 *Appendix D Questionnaire survey*

1087 **PART B** *General Importance*

1088 *Please rank the importance of the following walking indicators by selecting one number from*

1089 *1 to 5 (1 not very important, 5 very important)*

<b>Indictors</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
Slower traffic speed					
Buffer and barriers (curb and furnishing zone)					
Fewer raffic lane					
Shorter crossing distance(curb extension)					
Mid-block crossing					
Social space (café)					
Landscape and trees					
Furniture and facilities (trash receptacle)					
Footpath pavement					
Marking ( crosswalk)					
Sidewalk on bothsides					
Width of footpath					
Standard driveway					
Lighting					
Slope					
Ramp					
toilet					
grad					
Pedestrian signal					
Bench and seating area					
Park and space for playing					
Shade/ Thermal comfort					

1090

1091

1092