



Emerging methods for noninvasive sensing of soil moisture dynamics from field to catchment scale: a review

Heye R. Bogaen,^{1*} Johan A. Huisman,¹ Andreas Güntner,² Christof Hübner,³ Jürgen Kusche,⁴ François Jonard,¹ Sibylle Vey² and Harry Vereecken¹

Soil moisture is an important state variable in the terrestrial system because it controls the exchange of water and energy between the land surface and the atmosphere. In this study, we review recent advances in noninvasive techniques that allow continuous noninvasive and contactless measurements of soil moisture dynamics at the field to basin scale. In particular, we report on (1) cosmic-ray neutron probes, (2) Global Navigation Satellite System reflectometry, (3) ground-based microwave radiometry, (4) gamma-ray monitoring, (5) terrestrial gravimetry, and (6) low-frequency electromagnetic surface waves. Each method is described in terms of its basic principle, measurement scales, calibration issues, measurement accuracy, and applications. We hope that this review will further stimulate the community to invest in the continued development of novel soil moisture sensing methods that address the need for large-scale soil water content measurements with sufficiently high temporal resolution. © 2015 Wiley Periodicals, Inc.

How to cite this article:

WIREs Water 2015, 2:635–647. doi: 10.1002/wat2.1097

INTRODUCTION

Soil moisture is an important state variable in the terrestrial system because it controls the exchange of water and energy between the land surface and the atmosphere. Soil moisture is highly variable in space and time with characteristic length scales ranging from a few centimeters up to several kilometers and characteristic time scales ranging from minutes up to years.¹ Information on soil moisture dynamics is

important for optimizing agricultural management,² and to improve our understanding of biogeochemical processes,³ vadose zone processes,⁴ and atmospheric processes.⁵ Many studies have analyzed spatial variability of soil moisture at a range of scales, including the field scale,^{6,7} the catchment scale,^{8,9} the regional scale,^{10,11} and the continental scale.^{12,13}

The spatial characteristics of soil moisture data can be characterized using the ‘scale triplet’ proposed by Blöschl and Sivapalan,¹⁴ encompassing support, spacing, and extent. The support refers to the integration volume of the measurement methods, the spacing to the distance between single measurements, and the extent to the area over which measurements are available (e.g., area of measurement network). In a similar manner, we can define a scale triplet for time series of soil moisture⁵: (1) the integration time of the measurement, e.g., continuous, intermittent, day and night (equivalent to support in the spatial sense); (2) the measurement frequency (equivalent to spacing); and

*Correspondence to: h.bogaen@fz-juelich.de

¹Agrosphere Institute, Forschungszentrum Jülich GmbH, Jülich, Germany

²Department Earth Surface processes, GFZ German Research Centre for Geosciences, Potsdam, Germany

³Institute for Industrial Data Processing and Communication, Mannheim University of Applied Sciences, Mannheim, Germany

⁴Institute of Geodesy and Geoinformation, University of Bonn, Bonn, Germany

Conflict of interest: The authors have declared no conflicts of interest for this article.

(3) the time period of the measurements (equivalent to extent).

Soil moisture is most commonly measured using *in situ* electromagnetic (EM) soil moisture sensors with rather small support (typically smaller than 100 cm³).¹ EM sensors measure the dielectric permittivity of the soil and empirical or semi-theoretical models can be used to convert dielectric permittivity estimates into soil moisture.^{15,16} For instance, time domain reflectometry (TDR) sensors determine dielectric permittivity from the velocity of an EM wave that is emitted by a pulse generator and passed along a waveguides of the TDR probe.¹⁶ Capacitance sensors are less expensive and easier to operate. They determine the soil permittivity by measuring the charge time of a capacitor.¹⁷ Another cost-effective EM sensor type is the time domain transmission (TDT) sensor, which measures the propagation velocity of an EM wave along a closed transmission line.^{18,19} However, large-scale soil moisture estimates with a larger support and extent can be acquired from microwave sensors on board of airborne or spaceborne platforms.²⁰ However, soil moisture obtained by remote sensing typically suffer from limitations related to spatial averaging, dense vegetation, and small penetration depths.⁴

An important problem in soil moisture assessment is the space-time trade-off. As the spatial support and extent of the soil moisture observation increase, the temporal measurement frequency typically decreases.²¹ This problem is important because the behavior of the entire system is not simply the sum of its parts in most environmental systems. Recently, Robinson et al.²¹ analyzed the spatial and temporal scales of existing geophysical methods to infer processes at the watershed and basin scale. They argued that considerable gaps exist beyond the measurement capabilities of current technologies and they made a plea for new technological developments to obtain measurements at larger scales, while still maintaining a sufficiently high temporal resolution. In recent years, several new measurement technologies have emerged that attempt to address this need, including hydrogeophysical methods, *in situ* sensor technologies, and distributed sensor networks.^{22–24}

In this study, we aim to review recent advances in the development of noninvasive and contactless measurement techniques that allow the continuous determination of soil moisture dynamics at the field to catchment scale. In particular, we will focus on cosmic-ray neutron monitoring, Global Navigation Satellite Systems (GNSSs) reflectometry, ground-based microwave radiometry, gamma-ray monitoring, terrestrial gravimetry, and low-frequency

EM surface waves. We selected these measurement techniques because they are particularly well suited to fill the space–time scale gap in measurement capability. They have the following important advantages compared to other soil moisture sensing methods not reviewed here: (1) soil structure remains undisturbed by the measurements, (2) the measurement device can be operated continuously (e.g., also during tilling operations), and (3) the soil moisture measurements integrate large areas (i.e., larger than 100 m²).

The remainder of this review is organized as follows. In *Emerging Noninvasive Methods for Soil Moisture Determination* section, we present an overview of the selected methods for soil moisture determination in terms of their basic principle, measurement scales, calibration issues, measurement accuracy, and existing applications. In *Status and Future Prospects* section, we discuss the development status and future prospects for all presented techniques.

EMERGING NONINVASIVE METHODS FOR SOIL MOISTURE DETERMINATION

Cosmic-Ray Neutron Monitoring

Cosmic-ray neutron probes (CRNP) count secondary fast neutrons near the soil surface that are created by primary cosmic-ray particles in the atmosphere and in the soil.^{25,26} Hydrogen atoms in the soil, which are mainly present as water, moderate the secondary neutrons on the way back to the surface. Therefore, fewer neutrons escape when soil moisture content is high, whereas more neutrons are able to escape from a dry soil (Figure 1).

This results in a negative correlation between near-surface fast neutron counts and soil moisture content and enables the use of the CRNP to sense soil moisture. In order to detect neutrons in the fast energy range, a detector tube filled with ³He and shielded with polyethylene is used. The polyethylene shielding moderates fast neutrons to thermal neutrons before they enter the detector tube. Within the tube, neutrons that collide with ³He atoms will produce electrons that induce pulses of electrical current that are counted by the detector.

Initial simulations with neutron interaction models have suggested that the horizontal footprint of the CRNP has a radius of about 300 m that is almost independent of soil moisture.²⁶ More recently, it was reported that the footprint is inversely proportional to air density and linearly proportional to the height of the sensor above the ground for heights up to 125 m.²⁷ The footprint also depends on atmospheric

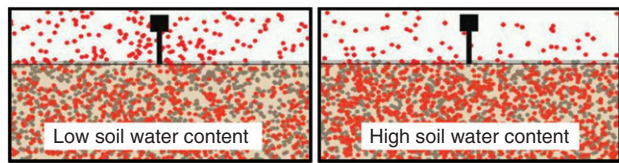


FIGURE 1 | Schematic drawing showing that the emission of fast neutron (red dots) from the soil is controlled by soil water content (lower fast neutron intensity in the lower atmosphere in case of higher hydrogen contents in the soil and vice versa).

humidity (it decreases by 40 m for every 0.01 kg/kg increase in specific humidity). The measurement depth is strongly dependent on soil moisture (~70 cm for dry soils and ~12 cm for wet soils). In addition, the penetration depth will further decrease in the presence of further belowground hydrogen pools, e.g., organic matter, lattice water, and root biomass.²⁸

Three parameterization methods have been suggested to convert neutron intensity into soil moisture: (1) the site-specific N_0 -method,²⁹ (2) the universal calibration function (hmf-method),³⁰ and (3) the COsmic-ray Soil Moisture Interaction Code (COSMIC).³¹ The site-specific N_0 -method requires intensive soil sampling to adequately estimate the N_0 -calibration parameter. The universal calibration function was developed to overcome the necessity of local calibration campaigns and to allow measurements with a moving CRNP.³² COSMIC attempts to reproduce the interaction between neutrons and soil moisture in a simplified way and requires site-specific calibration of three parameters. Recently, the performance of these three methods was compared at 10 different sites in Germany and it was found that they performed equally well when uncertainty of neutron intensity measurements was considered.³³ However, sensor-to-sensor variability in counting efficiency should be considered to improve comparability between CRNP within a network.³⁴ In addition, Baatz et al.³⁴ presented a vegetation correction for CRNP applications and Franz et al.³⁵ demonstrated the use of cosmic ray for monitoring soil moisture at 12×12 km spatial scale.

The CRNP counting rate precision is governed by Poisson statistics, which means that the standard deviation of counts depends on the total number of counts.³⁶ Thus, the measurement uncertainty decreases with increasing counting rates. High neutron counting rates can be expected for locations of high altitude and latitude because of higher incoming cosmic-ray intensity.³⁷ The uncertainty of the soil moisture measurement depends on the accuracy of the neutron count measurements²⁶ (~2%), which corresponds to a soil moisture content of ~0.01 m³/m³. However, the measurement accuracy also depends on

other factors, such as the accuracy of the calibration procedure and the need to account for additional sources of hydrogen (e.g., above- and below-ground biomass, humidity of the lower atmosphere, lattice water of the soil minerals, organic matter and water in the litter layer, intercepted water in the canopy, and soil organic matter).

The most attractive feature of the CRNP is its ability to measure integral soil moisture at the field scale with an acceptable temporal resolution (e.g., hourly). The applicability of the CRNP has been demonstrated for several different environmental settings. Franz et al.³⁸ found a soil moisture root-mean-square error (RMSE) of 0.017 m³/m³ using a standard CRNP at a desert site (CRS-1000; Hydroinova LLC, Albuquerque, NM, USA). For a location with high biomass and soil moisture contents, Bogena et al.²⁸ were still able to obtain daily mean soil moisture estimates with an RMSE smaller than 0.04 m³/m³. Recently, Lv et al.³⁹ showed that recalibrated CRNP output was able to capture soil moisture dynamics in a heterogeneous forest site in Utah, USA, with an RMSE of 0.011 m³/m³. In the past years, several networks of CRNP have been established in the United States,²⁶ Germany,³³ and Australia.⁴⁰

GNSS Reflectometry

GNSSs were originally used for positioning and navigation. However, GNSS signals can also be used to infer soil moisture.⁴¹ The retrieval algorithm for soil moisture from single GNSS receivers is based on the power variations of the GNSS signal.⁴² The direct signal from the GNSS satellite and the signal reflected at the land surface are simultaneously received at the antenna and add up to the observed signal power (Figure 2). The simultaneous reception of the direct and reflected signals causes an interference pattern in the signal power due to the different travel distances from the satellite to the antenna. The amplitude and phase of the interference pattern are affected by the soil permittivity, which is linked to the soil moisture content.⁴³ GNSS signals comprise two L-band frequencies with wavelengths of 19.05 and 24.45 cm. For soil moisture estimation, both dual frequency GNSS sensors that are permanently installed in geodetic networks as well as lower cost sensors that receive one frequency only can be used.

The effective measurement depth of GNSS reflectometry strongly depends on soil moisture. For wet soils, the GNSS signal is reflected within the first millimeters below the land surface while for dry soils the signal penetrates deeper into the soil and is reflected within a near-surface layer of up to 7 cm depth.⁴³ The reflections start at a distance of 70 m from the GNSS

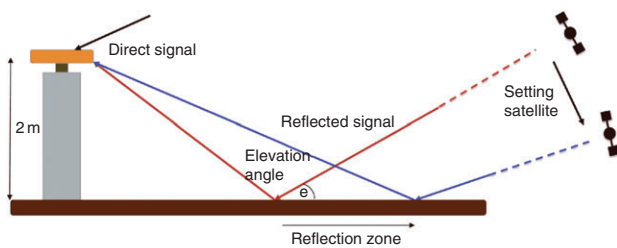


FIGURE 2 | Global Navigation Satellite System (GNSS) reflectometry consists of receiving the direct and the reflected GNSS signal by the GNSS antenna. When the satellite is approaching the horizon, the signal is reflected at a larger distance to the GNSS antenna.

antenna and approach the antenna until 2 m for a satellite pass from 5° to 30° elevation. The satellite needs about 1 h for this passage. Within this time soil moisture information is obtained over a ground track about 70-m long and 4-m wide. The radius of the area that is scanned around a GNSS antenna varies from 50 m for an antenna installed at 1 m height to 330 m for an antenna installed at 20 m height. Naturally, the footprint is reduced if the line of sight from the antenna to the satellites is obstructed by trees, buildings, or mountains. The increasing number of GNSS satellites within the upcoming Satellite Navigation Systems Galileo, Beidou and QZSS in parallel with the modernization of the U.S. GPS and the Russian GLONASS system will increase the temporal and spatial resolution of the soil moisture estimates obtained with GNSS reflectometry. While each GPS satellite has a revisit time of 1 day at any antenna location, this large number of satellites potentially allows for subdaily resolution of soil moisture monitoring.

Empirical studies have shown that the amplitude, frequency, and phase of the interference pattern are affected by soil moisture.^{41,43} Chew et al.⁴⁴ found a linear relationship between soil moisture and the phase of the interferogram based on both field data and electrodynamic forward modeling, with negligible variations of the slope of this relationship as a function of soil texture. Thus, relative soil moisture changes can be directly inferred from the GNSS signal. In order to obtain absolute soil moisture values, local calibration campaigns with *in situ* soil moisture sensors are necessary for each site. Another approach is the calibration of absolute soil moisture by assuming that the minimum value seen in a sufficiently long GNSS time series corresponds to a plausible texture-dependent estimate of the residual soil moisture.

The accuracy of soil moisture estimates from GNSS reflectometry depends on (1) the vegetation cover of the ground, (2) the type of the GNSS signal, (3) the sampling rate, and (4) the calibration. Rodriguez-Alvarez et al.⁴⁵ showed that soil moisture

derived from GNSS over bare soil agreed well with *in situ* data (RMSE of 0.03 m³/m³). Soil moisture estimation in a corn field using a specifically designed GNSS receiving system of two antennas resulted in differences of less than 0.04 m³/m³ to *in situ* data.⁴⁶ A sampling rate of 30 s which is the standard for GNSS positioning reduces the accuracy of soil moisture estimates slightly, but Vey et al. (unpublished data) showed that the precision is still better than 0.02 m³/m³.

The application of GNSS reflectometry for soil moisture estimation has been successfully demonstrated for a few sites with different soil type, climate, and vegetation cover in Uzbekistan,⁴¹ Northern America,^{42,47} and South Africa (Vey et al., unpublished data). The direct surrounding of existing permanent GNSS stations is not always suitable for soil moisture estimation, especially if the stations are installed in urban areas with sealed surfaces. The method requires bare soil or sparse vegetation cover and wide open space without obstructions like trees or buildings. For the stations of the plate boundary observatory in North America, soil moisture is successfully estimated at 59 sites in near-real time.²²

Ground-Based L-Band Microwave Radiometry

Since the 1970s, L-band microwave radiometry has been recognized as a promising tool for soil moisture estimation because the microwave emissivity of soil is directly dependent on moisture content. At microwave frequencies, the measured radiance is proportional to the physical temperature and emissivity of the soil (Rayleigh–Jeans approximation of Planck’s Law) and referred to as brightness temperature (T_B [K]).⁴⁸ A simple zero-order radiative transfer approach called the Tau-Omega model is classically used to model microwave emission.⁴⁹ In this approach, vegetation effects are parameterized by tau, the vegetation opacity, and omega, the single-scattering albedo. However, for dense vegetation, such as forest or mature corn, more physically based approaches have to be used to better account for vegetation canopy scattering.⁵⁰ For smooth soil surfaces and homogeneous soils, the soil emissivity is usually computed from the soil dielectric permittivity using the Fresnel equations. More sophisticated models are used to account for soil surface roughness and layering in the soil.^{51,52} Finally, soil dielectric permittivity is related to soil moisture using dielectric mixing models.⁵³

The horizontal footprint of a ground-based L-band radiometer depends on the height of the antenna, the observation angle, and the antenna characteristics. Ground-based instruments are typically placed from a few meters to more than 20 m above

the surface, which results in radiometer footprint on the order of tens of square meters. For example, if we consider an L-band radiometer (1.4 GHz) with a horn antenna fixed on a tower at 18 m above the ground, with an observation angle of 40° relative to nadir, and characterized by a -3 dB full beamwidth of 12°, the -3 dB footprint will be approximately 25 m² (elliptic footprint with half axes of about 3.2 and 2.5 m). The measurement depth depends on the soil moisture (between 2 and 5 cm).

Radiometer calibration generally requires both internal and external calibration.⁵⁴ The internal calibration consists of performing measurements with hot and cold internal noise reference sources connected to the radiometer input. From the known noise temperature of the calibration sources and the corresponding measured receiver output voltage, a linear calibration curve can be derived that is used to obtain the antenna temperature by linear interpolation. In addition, external calibration is realized by pointing the antenna to specific targets with well-known brightness temperatures, such as the sky (cold target: $T_B \sim 5$ K) or a microwave absorber (hot target: T_B is equal to the physical temperature of the absorber). The external calibration is performed to correct the antenna temperature for the noise added by lossy feed cables connecting the receiving antenna with the radiometer unit and the noise added by the antenna itself. Internal calibration is typically performed before each measurement, while the external calibration is performed about once per day during continuous monitoring.

L-Band (1–2 GHz) has been identified as the optimal frequency band for soil moisture estimation using radiometers because of the lower attenuation and scattering in soils and vegetation. Radiometer sensitivity is in general less than 1K,⁴⁸ which should then result in a soil moisture estimation accuracy of better than 0.01–0.02 m³/m³. However, the soil moisture retrieval is also affected by soil surface roughness, vegetation cover, and soil heterogeneity, which can significantly reduce the accuracy of the estimation. The quality of the calibration as well as the dielectric mixing model will also affect the measurement accuracy. Over an agricultural bare soil, soil moisture was estimated with an RMSE of 0.02 m³/m³ after accounting for soil surface roughness.⁵⁵ Pardé et al.⁵⁶ carried out L-band measurements over a wheat field and found an RMSE of 0.051 m³/m³.

The potential of ground-based microwave radiometry for soil moisture monitoring and mapping at the field scale has been already demonstrated in many different contexts, such as bare agricultural soils,⁵⁵ grasslands,⁵⁷ crop fields,^{56,58} forested areas,⁵⁹ and freezing soils.⁶⁰ A large number of these

radiometer studies have been initiated in support of the ESA's Soil Moisture and Ocean Salinity (SMOS) mission launched in 2009 and the NASA's Soil Moisture Active Passive (SMAP) mission launched in 2015 in order to improve the understanding of passive microwave signatures of the Earth's surface and to validate the large-scale remote sensing soil moisture products.

Gamma-Ray Intensity Monitoring

All rocks and soils emit gamma radiation at a range of energies due to the decay of radioactive isotopes (⁴⁰K, ²³⁸U, and ²³²Th) and their progenies in soil.⁶¹ The attenuation of gamma rays in soil can be approximated by classical radiation intensity laws.⁶² As attenuation in water is higher than in air or solid soil particles, a negative correlation between measured gamma-ray intensity and soil moisture is expected. Gamma-ray intensity can be measured using airborne and ground-based platforms. Although the influence of soil moisture can be detected by airborne surveys,⁶² it is difficult to determine soil moisture quantitatively from such data because of the unknown spatial distribution of the radioactive isotopes that determine the background radiation intensity. Therefore, a more promising approach for soil moisture estimation from gamma-ray intensity is the use of permanently installed measurement stations that provide temporal changes in spectrometric or the total amount of gamma-ray intensity.⁶³ Here, the total amount of gamma-ray intensity is of particular interest because it can be measured with relatively cheap Geiger-Müller counters.

Gamma-ray attenuation strongly decreases with increasing energy,⁶¹ which means that high-energy gamma rays travel further than low-energy gamma rays. At a high-energy of 2.6 MeV, the radius of the horizontal footprint (90% of energy) is on the order of 250 m and independent of soil moisture for an airborne survey at a height of 100 m.⁶¹ This value decreases with decreasing energy and also depends on the angular sensitivity of the detector. For gamma-ray intensity measurements near the surface, the footprint is much smaller. According to the approximate models used for airborne surveys, the radius of the horizontal footprint is on the order of several meters for a sensor height of 1 m at an energy of 2.6 MeV. However, a better assessment of the horizontal footprint using more advanced gamma-ray transport modeling is required to confirm this. The measurement depth similarly depends strongly on the gamma-ray energy.⁶⁴ At a high energy of 2.6 MeV, the measurement depth above which 90% of the measured gamma rays originate is 24 cm in a homogeneous dry soil with a

bulk density of 1.0 g/cm, and 15 cm in a dry soil with a bulk density of 1.6 g/cm. When these two soils are fully saturated, the measurement depths are reduced to 14 and 12 cm, respectively.

The gamma-ray intensity near the soil surface not only depends on the decay of radioactive isotopes in the soil. There are three main sources of additional gamma radiation: cosmic rays that enter and interact with the atmosphere, anthropogenic ^{137}Cs from nuclear test and accidents, and atmospheric ^{222}Rn .⁶⁵ Therefore, accurate soil moisture estimates from gamma-ray measurements can only be obtained when all interfering time-variable, anthropogenic, and nonterrestrial signals have been removed from the data. Loijens⁶⁴ provided a simple calibration relationship between the terrestrial component of gamma-ray intensity and gravimetric soil moisture. In principle, a single calibration measurement of gamma-ray intensity for known moisture would be sufficient to parameterize this relationship. However, this has not been extensively validated, and there is considerable need for further studies here.

Only very few studies have attempted to relate soil moisture and gamma-ray intensity quantitatively. Loijens⁶⁴ was able to estimate gravimetric soil moisture of the top 25 cm of the soil with an accuracy of 0.025 g/g. Nevertheless, more studies are required to establish measurement accuracy across a range of soil types with variable bulk density and different amounts of radioactive isotopes. Airborne gamma-ray surveys with low-flying airplanes have been used to determine soil moisture content.⁶⁶ However, such airborne surveys can only cover a relatively small area (<100 km²), and the cost of airborne surveys are nowadays considered to be excessive for most purposes.

Terrestrial Gravimetry

Gravimeters measure the strength of gravity, i.e., the sum of gravitational attraction and inertia forces. For a terrestrial instrument at rest, the latter reduces to centrifugal force. The conventional unit in gravimetry is the Gal (1 mGal = 10^{-5} m/s²). The by far largest time-variable contribution to gravity, several hundred μGal , is caused by the direct (astronomical) tides, solid Earth tides and ocean tides. Gravity variations induced by soil moisture and groundwater variations may be in the order of up to a few tens of μGal . Gravity variations can thus be converted into changes of volumetric moisture in the unsaturated zone if the depth of storage variations is known, and to water table changes when the specific yield is known. Nowadays, two principles are mostly used to design gravimeters. Relative gravimeters measure the force that is required to keep a test body in rest. While

spring gravimeters employ a metal or quartz spring for this purpose, superconducting gravimeters (SGs) keep the test mass levitated within a magnetic field generated by a very stable current flowing through coils. Absolute gravimeters measure the motion path of a free-falling test body by tracking the location of a falling corner-cube reflector with laser interferometry within a vacuum tube.

Creutzfeldt et al.⁶⁷ found through simulations that a water layer of 1 m thickness, distributed along a realistic terrain with the gravimeter located close to an elevated topographic position in the center of the area, may cause gravity to increase by 52 μGal . Given the inverse distance relationship of gravity to mass sources, it can be shown that about 95% of the local signal recorded by a gravimeter is generated within a radius of about 50 m around the instrument if the mass changes occur at 1 m below the (flat) terrain surface. A fundamental limitation common to all gravimeters is that an integral signal is recorded; i.e., the depth of soil moisture variation cannot be unequivocally defined by a gravimeter alone. The temporal resolution of gravimetry ranges from minutes in the case of continuous recording with superconducting gravimeters to a user-defined frequency, e.g., daily, monthly, or seasonal, in the case of time-lapse monitoring with spring or absolute gravimeters.

The instrument output (e.g., the feedback voltage) is transferred by a calibrated scale factor into units of gravity using vertical baselines or other gravimeters. For superconducting gravimeters, the scale factor usually is nearly constant over time and does not pose a problem for hydrological applications while for spring gravimeters it may need to be determined on a regular basis. In addition, all gravimeters need to be corrected for drift effects. For instance, Reudink et al.⁶⁸ found that tilting a relative gravimeter by more than 5–6 degree over more than 20–30 min leads to exponential drifts that may initially amount up to 100 μGal . Superconducting gravimeters are susceptible to drifts in the order of some $\mu\text{Gal}/\text{a}$. Drift calibration is commonly achieved by episodic (1–2 per year) comparison to absolute gravimeters. Furthermore, it is important to realize that a vertical motion of the instrument by 1 mm causes gravity changes of up to 0.3 μGal . Therefore, regular height checks are required (e.g., using a differential GPS).

The mere instrument precision is in the range of 0.1 μGal for superconducting gravimeters, which corresponds to a water storage change of 2.4 mm, up to several μGal for relative and absolute gravimeters. However, the accuracy of gravimetric measurements is limited by additional factors, e.g., local stability, ambient (micro-) seismicity (from earthquakes, wind- or sea

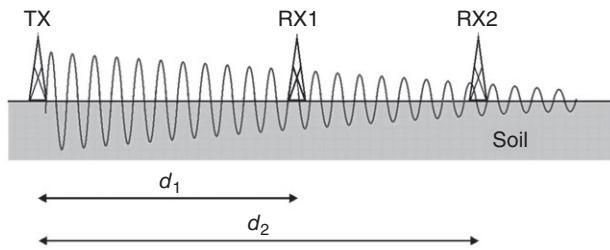


FIGURE 3 | Schematic showing simplified low frequency surface radio wave propagation.

wave-induced, or traffic). Furthermore, the removal of all other time-variable mass changes is required, and associated errors may lead to a less accurate residual signal for soil moisture estimation. Tidal effects can be removed with comparatively high accuracy using existing tide models. Barometric pressure effects can be accounted for through local admission factors or full-scale 3D atmospheric modeling.⁶⁹ Similarly, other environmental corrections, in particular regional and global oceanic and hydrological effects need to be removed both in terms of their mass attraction and loading effect on the gravimeter.⁷⁰ Errors in removal of unwanted large-scale signals may be reduced by common-mode rejection of two near-by gravimeters as they show up similarly in both instruments.⁷¹

Example applications include Naujoks et al.,⁷² who isolated water storage dynamics among different topographic units of a hilly temperate headwater catchment using repeated gravity measurements and a superconducting gravimeter at the reference point. Pfeffer et al.⁷³ revealed a characteristic organization of spatiotemporal storage variations in the vadose zone of a semi-arid Sahelian hillslope that could be related to surface water infiltration processes. Creutzfeldt et al.⁷⁴ demonstrated the interannual impact of the Central European drought in 2003 on local water storage. Hector et al.⁷⁵ evaluated superconducting gravimeter applications for the case of a subhumid site in Africa.

Low-Frequency EM Surface Waves

This approach for obtaining large-scale soil moisture estimates is based on a correlation between propagation characteristics of low frequency EM surface waves and the electrical conductivity and dielectric permittivity of the soil (Figure 3).

Consider an EM wave that travels from transmitter TX to receivers RX1 and RX2. The amplitude and phase of this wave are altered by the dielectric soil properties. By measuring the amplitude and phase variations, the average soil properties along transects d_1 and d_2 , and between receiver RX1 and RX2 can

be determined. Both natural sources such as lightning strikes⁷⁶ and man-made transmitters⁷⁷ can be used as an EM source. The most-suited frequency range for man-made sources is in the frequency range of kHz to MHz, where radio, navigation, and time dissemination transmitters operate. For example, the Normal Time Service Germany transmits at 77.5 kHz with a power of 50 kW, which results in a range of up to 2000 km. Although man-made transmitters can provide continuous measurements in principle, it was found that only selected time intervals are useful for evaluation. The most disturbing factor is the reflection of the emitted waves at the ionosphere boundary, which leads to multipath propagation interference. Typically, the best measurement time is around noon because solar radiation leads to strong ionospheric absorption without reflections.

The receiver distances are between tens of kilometers and a few hundred kilometers which corresponds to the integral lengths for the derived soil properties. The penetration depth of surface waves is variable and strongly depends on the frequency as well as the dielectric soil properties and soil layering. For 77.5 kHz, the typical penetration depths may be from a meter to tens of meters depending on the electrical properties of the critical zone. Soil layers may lead to anomalous propagation effects.⁷⁸ The expected temporal resolution is about 1 day because adequate conditions for radio wave propagation are required.

Wave propagation is primarily dependent on soil electrical conductivity and therefore temperature and salinity. A minor effect is due to dielectric permittivity. Varying groundwater table is a major disturbing influence. So far no stringent calibration method exists. Therefore, empirical or semi-empirical relationships have been developed based on reference point sampling along transects.^{79,80}

The uncertainty of soil moisture measurements depends on the accurate determination of amplitude and phase of the EM waves. A main technical challenge is the GPS-based time synchronization of the widely separated receivers in the nanosecond range. Furthermore, time intervals without multipath interference have to be selected. An overall accuracy in soil moisture cannot be specified so far, but a realistic operational target would be about $0.05 \text{ m}^3/\text{m}^3$ under the assumption that additional information about soil types along the measurement transect are available.

Kiseleva et al.⁷⁹ presented a first application of this method, in which a DCF77 time signal from Mainflingen, Germany, was used for a 2-year period. In their study, three stations were lined up at intervals of 20 km to measure the phase transition of the surface wave. The GPS time signal was used as a

reference for the phase transition and several soil moisture and groundwater monitoring stations along the measurement section were used to calibrate and to evaluate the data.

STATUS AND FUTURE PROSPECTS

In this final section, we discuss the development status and future prospects for all presented techniques. Figure 4 shows a schematic diagram highlighting the gap in measurement capability of classical soil moisture monitoring technologies beyond a certain measurement capability trajectory.²¹ We extended this diagram by adding the emerging soil moisture sensing techniques discussed in this review in terms of achievable temporal resolution and spatial scale. For spatial scale, support was used for single instruments, and extent was used for network-compatible instruments. Clearly, the emerging methods are able to fill most of the identified scale gap.

Ground-based microwave radiometers, CRNP, and low-frequency EM surface waves are measurement methods that have been explicitly developed for soil moisture monitoring. Despite their long existence, ground-based microwave radiometers have been typically used in a nonoperational mode for the development of transfer algorithms that relate brightness temperature to soil moisture, and the validation of satellite data of brightness temperature. The main obstacles for their operational use are the complex postprocessing of the raw data, and the measurement limitations in the presence of dense vegetation. However, the CRNP technology is more straightforward and affordable, which allows the establishment of CRNP networks to cover larger areas. To highlight this promising ability for networking, we have opted to represent the spatial scale of the cosmic-ray probe with the potential network extent instead of support in Figure 4. Several cosmic-ray probe networks already exist worldwide. The largest network of CRNP is the COSMOS network with more than 50 probes, distributed mainly in the United States.²⁶ Other operational CRNP networks have been set up in Germany,³³ Australia,⁴⁰ and the UK.⁸¹ The neutron count data from these networks are typically freely available, which enables the direct use for environmental modeling activities, such as weather and flood forecasting.

In contrast, the analysis of low-frequency EM surface waves for the determination of soil moisture is a very new topic and the technique is still under development. Initial results of Kiseleva et al.⁷⁹ show considerable potential as well as significant limitations. In the future, it might be a candidate for

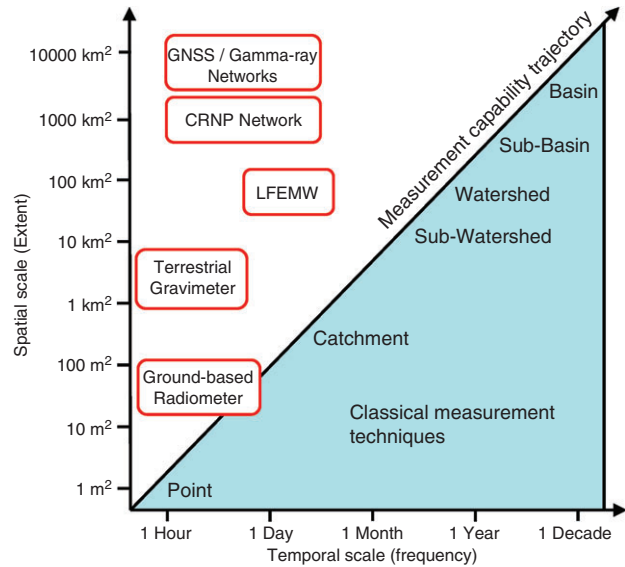


FIGURE 4 | Schematic diagram showing the trade-off of the spatial scale ('support' in terms of single sensors and 'extent' in terms of networks) and the temporal resolution of existing soil moisture instruments and the potential of the emerging soil moisture sensing techniques discussed in this review. GNSS, Global Navigation Satellite Systems; CRNP, cosmic-ray neutron probe; LFEMW, low-frequency electromagnetic surface waves.

national or international soil moisture measurement networks operating at scales of around a few tens of kilometers with measurement depths that encompass the critical zone for hydrological, agricultural, as well as meteorological applications. In principle, such networks of transmitters and receivers could allow for an areal estimation of soil moisture fields, in a similar fashion as commercial microwave links are being used to create spatial rainfall distributions.⁸²

Gravimeters, gamma-ray probes, and GNSS instruments are used for other purposes than soil moisture estimation in the first place. Gravimeters have originally been used for geophysical applications, and the development of high-precision (superconducting) gravimeters as a hydrological field instrument is at an early stage. Currently, the high costs of these instruments also limit their more widespread deployment in hydrological monitoring networks. Monitoring networks measuring outdoor gamma-ray radiation have been established after the nuclear reactor accident in Chernobyl in 1986 in most countries of the European Union (EU); and other international networks exist (e.g., RADNET in the United States). Such networks provide time-lapse measurements of gamma-ray intensity over a broad energy spectrum. Data from the European network have already been used to predict ²²²Rn flux,⁸³ but not yet to obtain estimates of soil moisture, and this appears a promising research

TABLE 1 | Cost Estimates for Single Instruments, Approximated Number of Operational Stations and Soil Moisture Measurement Accuracy Ranges for the Different Methods

Method	Approx. Instrument Costs [€]	Approx. Number of Operational Stations	Measurement Accuracy [Vol.%]
CRNP	10,000–25,000	200–300	~2–5
GNSS	2000–12,000 ¹	~2000 ²	~3–5
Radiometry	50,000–100,000	10–15	~2–5
Gamma ray	3000–10,000 ¹	>4000 ³	~2–5
Gravimetry	~250,000 ⁴ ; 50–90,000 ⁵	~50 ^{4,6}	Not defined ⁷
LFEMW	~3000	—	Target value: ~5

¹As operational GNSS and gamma-ray networks already exist, in principle no further instruments need to be purchased.

²Potentially usable for operational soil moisture monitoring; at the moment only 132 GNSS sites routinely process soil moisture (<http://xenon.colorado.edu/portal>).

³Potentially usable for operational soil moisture monitoring.

⁴Superconducting gravimeter (~36 observatory superconducting gravimeters and 16 portable superconducting gravimeters).

⁵Spring gravimeter

⁶This number refers to existing multipurpose instruments. However, only few are already used in an operational mode for soil moisture monitoring.

⁷See main text for error sources on gravity measurements.

avenue to obtain continental-scale information on soil moisture.

In the past 20 years, the world-wide network of GNSS instruments has increased immensely to obtain highly accurate positional information. For instance, the Plate Boundary Observatory in the United States consists of 1100 stations, and its data have already been used to infer soil moisture variability at the continental scale.⁴⁷ Clearly, the advantage of using existing global networks of instruments eliminates the need for acquisition and maintenance of soil moisture sensors. However, the location of the instruments may not be representative for the region of interest in all cases (e.g., focus on urban areas), and the required information on influencing factors (e.g., landuse, sources of noise, precipitation, etc.) that may be needed to evaluate this may not be available for all sites. In addition, local calibration may still be needed to derive soil moisture estimates with sufficient accuracy. A further limitation has to do with data availability. For instance, GNSS data are often archived only partially (e.g., without signal-to-noise ratio), which currently makes it difficult to extract useful information.⁴⁷ Nevertheless, the use of existing gamma-ray probes or GNSS equipment for soil moisture estimation has the potentially large advantage that existing networks can be used to provide soil moisture information in real time at more than thousand sites worldwide.⁸⁴ For this reason, we have again opted to represent both GNSS and gamma radiation networks with the spatial extent in Figure 4.

Table 1 gives an overview of the instrumental costs, the number of existing operational stations and

the measurement accuracy of the different methods. For instance, CRNP and GNSS can be considered as well established and promising approaches, especially CRNP for which a large sensor network is already operating worldwide. Ground based L-band radiometry are potentially useful, but only a couple of studies are available notwithstanding its long heritage. Terrestrial gravimetry has a lower potential to be used operationally for large-scale soil moisture monitoring due to its high costs. The use of gamma radiation and low-frequency EM surface waves (LFEMW) for soil moisture monitoring is still in the development phase. For gamma radiation, only a few early studies from the 1980s are available, while only one conference paper has been published for LFEMW.

CONCLUSION

We reviewed recent advances in noninvasive techniques to provide continuous noninvasive and contactless measurements of soil moisture dynamics at the field to basin scale and highlighted their development status and future prospects. We hope that this review will further stimulate the hydrology and soil hydrology science community to continue the development of novel soil moisture sensing methods that address the need for large-scale soil water content measurements with sufficiently high temporal resolution. We are convinced that these techniques will improve the description of local-scale processes related to hydrological fluxes, which is of key importance to reduce the large uncertainties that are still present in large-scale models used to predict these fluxes.

ACKNOWLEDGMENTS

The preparation of this review was supported by the Helmholtz-Alliance on 'Remote Sensing and Earth System Dynamics' funded by the Federal Ministry of Education and Research (BMBF) and by the Terrestrial Environmental Observatories (TERENO) Initiative of the Helmholtz-Association.

REFERENCES

- Vereecken H, Huisman JA, Pachepsky Y, Montzka C, van der Kruk J, Boga H, Weihermüller L, Herbst M, Martinez G, Vanderborght J. On the spatio-temporal dynamics of soil moisture at the field scale. *J Hydrol* 2014, 516:76–96.
- Sampathkumar T, Pandian BJ, Rangaswamy MV, Manickasundaram P, Jeyakumar P. Influence of deficit irrigation on growth, yield and yield parameters of cotton–maize cropping sequence. *Agric Water Manage* 2013, 130:90–102.
- Zhu Q, Liao K, Xu Y, Yang G, Wu S, Zhou S. Monitoring and prediction of soil moisture spatial–temporal variations from a hydrogeological perspective: a review. *Soil Res* 2013, 50:625–637.
- Vereecken H, Huisman JA, Boga H, Vanderborght J, Vrugt JA, Hopmans JW. On the value of soil moisture measurements in vadose zone hydrology: a review. *Water Resour Res* 2008, 44:W00D06.
- Seneviratne SI, Corti T, Davin EL, Hirschi M, Jaeger EB, Lehner I, Orlowsky B, Teuling AJ. Investigating soil moisture–climate interactions in a changing climate: a review. *Earth-Sci Rev* 2010, 99:125–161.
- Bell KR, Blanchard BJ, Schmutge TJ, Witzczak MW. Analysis of surface moisture variations within large-field sites. *Water Resour Res* 1980, 16:796–810.
- Famiglietti JS, Rudnicki JW, Rodell M. Variability in surface moisture content along a hillslope transect: Rattlesnake Hill, Texas. *J Hydrol* 1998, 210:259–281.
- Rosenbaum U, Boga HR, Herbst M, Huisman JA, Peterson TJ, Weuthen A, Western AW, Vereecken H. Seasonal and event dynamics of spatial soil moisture patterns at the small catchment scale. *Water Resour Res* 2012, 48:W10544.
- Western AW, Zhou S-L, Grayson RB, McMahon TA, Blöschl G, Wilson DJ. Spatial correlation of soil moisture in small catchments and its relationship to dominant spatial hydrological processes. *J Hydrol* 2004, 286:113–134.
- Romshoo SA. Geostatistical analysis of soil moisture measurements and remotely sensed data at different spatial scales. *Environ Geol* 2004, 45.
- Zhao L, Yang K, Qin J, Chen Y, Tang W, Montzka C, Wu H, Lin C, Han M, Vereecken H. Spatiotemporal analysis of soil moisture observations within a Tibetan mesoscale area and its implication to regional soil moisture measurements. *J Hydrol* 2013, 482:92–104.
- Entin JK, Robock A, Vinnikov KY, Hollinger SE, Liu S, Namkhai A. Temporal and spatial scales of observed soil moisture variations in the extratropics. *J Geophys Res Atmos* 2000, 105:11865–11877.
- Li B, Rodell M. Spatial variability and its scale dependency of observed and modeled soil moisture over different climate regions. *Hydrol Earth Syst Sci* 2013, 17:1177–1188.
- Blöschl G, Sivapalan M. Scale issues in hydrological modelling: a review. *Hydrol Process* 1995, 9:251–290.
- Topp GC, Davis JL, Annan AP. Electromagnetic determination of soil water content: measurements in coaxial transmission lines. *Water Resour Res* 1980, 16:574–582.
- Robinson DA, Jones SB, Wraith JM, Or D, Friedman SP. A review of advances in dielectric and electrical conductivity measurement in soils using time domain reflectometry. *Vadose Zone J* 2003, 2:444–475.
- Boga HR, Huisman JA, Oberdorster C, Vereecken H. Evaluation of a low-cost soil water content sensor for wireless network applications. *J Hydrol* 2007, 344:32–42.
- Blonquist JM, Jones SB, Robinson DA. A time domain transmission sensor with TDR performance characteristics. *J Hydrol* 2005, 314:235–245.
- Qu W, Boga HR, Huisman JA, Vanderborght J, Schuh M, Priesack E, Vereecken H. Predicting sub-grid variability of soil water content from basic soil information. *Geophys Res Lett* 2015, 42:789–796. doi:10.1002/2014GL062496.
- Wagner W, Blöschl G, Pampaloni P, Calvet JC, Bizzarri B, Wigneron JP, Kerr Y. Operational readiness of microwave remote sensing of soil moisture for hydrological applications. *Nord Hydrol* 2007, 38:1–20.
- Robinson DA, Binley A, Crook N, Day-Lewis FD, Ferré TPA, Grauch VJS, Knight R, Knoll M, Lakshmi V, Miller R, et al. Advancing process-based watershed hydrological research using near-surface geophysics: a vision for, and review of, electrical and magnetic geophysical methods. *Hydrol Process* 2008, 22:3604–3635.
- Ochsner TE, Cosh MH, Cuenca RH, Dorigo WA, Draper CS, Hagimoto Y, Kerr YH, Njoku EG, Small EE, Zreda M. State of the art in large-scale soil moisture monitoring. *Soil Sci Soc Am J* 2013, 77:1888–1919.
- Fares A, Temimi M, Morgan K, Kelleners TJ. In-situ and remote soil moisture sensing technologies for Vadose Zone Hydrology. *Vadose Zone J* 2013, 12.
- Robinson DA, Campbell CS, Hopmans JW, Hornbuckle BK, Jones SB, Knight R, Ogden F, Selker J, Wendroth

- O. Soil moisture measurement for ecological and hydrological watershed-scale observatories: a review. *Vadose Zone J* 2008, 7:358–389.
25. Zreda M, Desilets D, Ferré TPA, Scott RL. Measuring soil moisture content non-invasively at intermediate spatial scale using cosmic-ray neutrons. *Geophys Res Lett* 2008, 35:L21402.
26. Zreda M, Shuttleworth WJ, Zeng X, Zweck C, Desilets D, Franz T, Rosolem R. COSMOS: the COSmic-ray soil moisture observing system. *Hydrol Earth Syst Sci* 2012, 16:4079–4099.
27. Desilets D, Zreda M. Footprint diameter for a cosmic-ray soil moisture probe: theory and Monte Carlo simulations. *Water Resour Res* 2013, 49:3566–3575.
28. Bogena HR, Huisman JA, Baatz R, Hendricks Franssen HJ, Vereecken H. Accuracy of the cosmic-ray soil water content probe in humid forest ecosystems: the worst case scenario. *Water Resour Res* 2013, 49:5778–5791.
29. Desilets D, Zreda M, Ferré TPA. Nature's neutron probe: land surface hydrology at an elusive scale with cosmic rays. *Water Resour Res* 2010, 46:W11505.
30. Franz TE, Zreda M, Rosolem R, Ferré TPA. A universal calibration function for determination of soil moisture with cosmic-ray neutrons. *Hydrol Earth Syst Sci* 2013, 17:453–460.
31. Shuttleworth J, Rosolem R, Zreda M, Franz T. The COSmic-ray soil moisture interaction code (COSMIC) for use in data assimilation. *Hydrol Earth Syst Sci* 2013, 17:3205–3217.
32. Chrisman B, Zreda M. Quantifying mesoscale soil moisture with the cosmic-ray rover. *Hydrol Earth Syst Sci* 2013, 17:5097–5108.
33. Baatz R, Bogena HR, Hendricks Franssen HJ, Huisman JA, Qu W, Montzka C, Vereecken H. Calibration of a catchment scale cosmic-ray probe network: a comparison of three parameterization methods. *J Hydrol* 2014, 516:231–244.
34. Baatz R, Bogena H, Hendricks Franssen HJ, Huisman JA, Montzka C, Vereecken H. Development of an empirical vegetation correction for soil water content quantification using cosmic-ray probes. *Water Resour Res* 2015, 51.
35. Franz TE, Wang T, Avery W, Finkenbiner C, Brocca L. Combined analysis of soil moisture measurements from roving and fixed cosmic-ray neutron probes for multi-scale real-time monitoring. *Geophys Res Lett* in press.
36. Knoll GF. *Radiation Detection and Measurement*. New York: John Wiley & Sons; 2000.
37. Desilets D, Zreda M, Prabu T. Extended scaling factors for in situ cosmogenic nuclides: new measurements at low latitude. *Earth Planet Sci Lett* 2006, 246:265–276.
38. Franz TE, Zreda M, Rosolem R, Ferré TPA. Field validation of a cosmic-ray neutron sensor using a distributed sensor network. *Vadose Zone J* 2012, 11.
39. Lv L, Franz TE, Robinson DA, Jones SB. Measured and modeled soil moisture compared with cosmic-ray neutron probe estimates in a mixed forest. *Vadose Zone J* 2014, 13.
40. Hawdon A, McJannet D, Wallace J. Calibration and correction procedures for cosmic-ray neutron soil moisture probes located across Australia. *Water Resour Res* 2014, 50:5029–5043.
41. Larson KM, Small EE, Gutmann ED, Bilich AL, Braun JJ, Zavorotny VU. Use of GPS receivers as a soil moisture network for water cycle studies. *Geophys Res Lett* 2008, 35:L24405.
42. Larson KM, Small EE, Gutmann E, Bilich A, Axelrad P, Braun J. Using GPS multipath to measure soil moisture fluctuations: initial results. *GPS Solut* 2008, 12:173–177.
43. Larson KM, Braun JJ, Small EE, Zavorotny VU, Gutmann ED, Bilich AL. GPS multipath and its relation to near-surface soil moisture content. *IEEE J Sel Topics Appl Earth Observ Remote Sens* 2010, 3:91–99.
44. Chew CC, Small EE, Larson KM, Zavorotny VU. Effects of near-surface soil moisture on GPS SNR data: development of a retrieval algorithm for soil moisture. *IEEE Trans Geosci Remote Sens* 2014, 52:537–543.
45. Rodriguez-Alvarez N, Bosch-Lluis X, Camps A, Vall-llossera M, Valencia E, Marchan-Hernandez JF, Ramos-Perez I. Soil moisture retrieval using GNSS-R techniques: experimental results over a bare soil field. *IEEE J Geosci Remote Sens Lett* 2009, 47:3616–3624.
46. Rodriguez-Alvarez N, Bosch-Lluis X, Camps A, Aguasca A, Vall-llossera M, Valencia E, Ramos-Perez I, Park H. Review of crop growth and soil moisture monitoring from a ground-based instrument implementing the interference pattern GNSS-R technique. *Radio Sci* 2011, 46:RS0C03.
47. Larson KM, Small EE. Using GPS to study the terrestrial water cycle. *Eos, Trans Am Geophys Union* 2013, 94:505–506.
48. Njoku EG, Entekhabi D. Passive microwave remote sensing of soil moisture. *J Hydrol* 1996, 184:101–129.
49. Wigneron JP, Kerr Y, Waldteufel P, Saleh K, Escorihuela MJ, Richaume P, Ferrazzoli P, de Rosnay P, Gurney R, Calvet JC, et al. L-Band microwave emission of the biosphere (L-MEB) model: description and calibration against experimental data sets over crop fields. *Remote Sens Environ* 2007, 107:639–655.
50. Kurum M, Lang RH, O'Neill PE, Joseph AT, Jackson TJ, Cosh MH. A first-order radiative transfer model for microwave radiometry of forest canopies at L-band. *IEEE J Geosci Remote Sens Lett* 2011, 49:3167–3179.
51. Schneeberger K, Schwank M, Stamm C, de Rosnay P, Mätzler C, Flüher H. Topsoil structure influencing soil water retrieval by microwave radiometry. *Vadose Zone J* 2004, 3:1169–1179.

52. Jonard F, Weihermüller L, Schwank M, Jadoon KZ, Vereecken H, Lambot S. Estimation of hydraulic properties of a sandy soil using ground-based active and passive microwave remote sensing. *IEEE Trans Geosci Remote Sens* 2015, 53:3095–3109.
53. Dobson MC, Ulaby FT, Hallikainen MT, El-Rayes MA. Microwave dielectric behavior of wet soil, part II: dielectric mixing models. *IEEE Trans Geosci Remote Sens* 1985, GE-23:35–46.
54. Ulaby FT, Moore MK, Fung AK. *Microwave Remote Sensing: Active and Passive: Fundamentals and Radiometry*, vol. I. Boston, MA: Addison-Wesley; 1981.
55. Jonard F, Weihermüller L, Jadoon KZ, Schwank M, Vereecken H, Lambot S. Mapping field-scale soil moisture with L-band radiometer and ground-penetrating radar over bare soil. *IEEE Trans Geosci Remote Sens* 2011, 49:2863–2875.
56. Pardé M, Wigneron JP, Chanzy A, Waldteufel P, Kerr Y, Huet S. Retrieving surface soil moisture over a wheat field: comparison of different methods. *Remote Sens Environ* 2003, 87:334–344.
57. Temimi M, Lakhankar T, Zhan X, Cosh MH, Krakauer N, Fares A, Kelly V, Khanbilvardi R, Kumassi L. Soil moisture retrieval using ground-based L-band passive microwave observations in northeastern USA. *Vadose Zone J* 2014, 13.
58. Joseph AT, Van der Velde R, O'Neill PE, Choudhury BJ, Lang RH, Kim EJ, Gish T. L-Band brightness temperature observations over a corn canopy during the entire growth cycle. *Sensors* 2010, 10:6980–7001.
59. Guglielmetti M, Schwank M, Matzler C, Oberdorster C, Vanderborcht J, Fluhler H. FOSMEX: forest soil moisture experiments with microwave radiometry. *IEEE J Geosci Remote Sens Lett* 2008, 46:727–735.
60. Rautiainen K, Lemmetyinen J, Schwank M, Kontu A, Ménard CB, Mätzler C, Drusch M, Wiesmann A, Ikonen J, Pulliainen J. Detection of soil freezing from L-band passive microwave observations. *Remote Sens Environ* 2014, 147:206–218.
61. Minty BRS. Fundamentals of airborne gamma-ray spectrometry. *AGSO J Geol Geophys* 1997, 17:39–50.
62. Beamish D. Gamma ray attenuation in the soils of Northern Ireland, with special reference to peat. *J Environ Radioact* 2013, 115:13–27.
63. Yoshioka K. Soil-moisture gauge using terrestrial gamma-rays. *Nucl Geophys* 1989, 3:397–401.
64. Loijens HS. Determination of soil-water content from terrestrial gamma-radiation measurements. *Water Resour Res* 1980, 16:565–573.
65. Greenfield MB, Domondon AT, Okamoto N, Watanabe I. Variation in gamma-ray count rates as a monitor of precipitation rates, radon concentrations, and tectonic activity. *J Appl Phys* 2002, 91:1628–1633.
66. Jones WK, Carroll TR. Error analysis of airborne gamma-radiation soil-moisture measurements. *Agric Meteorol* 1983, 28:19–30.
67. Creutzfeldt B, Klügel T, Güntner A, Wziontek H. Simulating the influence of water storage changes on the superconducting gravimeter of the Geodetic Observatory Wettzell, Germany. *Geophysics* 2008, 73:WA95–WA104.
68. Reudink R, Klees R, Francis O, Kusche J, Schlesinger R, Shabanloui A, Sneeuw N, Timmen L. High tilt susceptibility of the Scintrex CG-5 relative gravimeters. *J Geodesy* 2014, 88:617–622.
69. Boy J-P, Longuevergne L, Boudin F, Jacob T, Lyard F, Llubes M, Florsch N, Esnault M-F. Modelling atmospheric and induced non-tidal oceanic loading contributions to surface gravity and tilt measurements. *J Geodyn* 2009, 48:182–188.
70. Kusche J, Klemann V, Bosch W. Mass distribution and mass transport in the Earth system. *J Geodyn* 2012, 59–60:1–8.
71. Kennedy J, Ferré TPA, Güntner A, Abe M, Creutzfeldt B. Direct measurement of subsurface mass change using the variable baseline gravity gradient method. *Geophys Res Lett* 2014, 41:2827–2834. doi:10.1002/2014GL059673.
72. Naujoks M, Weise A, Kroner C, Jahr T. Detection of small hydrological variations in gravity by repeated observations with relative gravimeters. *J Geodesy* 2008, 82:543–553.
73. Pfeffer J, Champollion C, Favreau G, Cappelaere B, Hinderer J, Boucher M, Nazoumou Y, Oi M, Mouyen M, Henri C, et al. Evaluating surface and subsurface water storage variations at small time and space scales from relative gravity measurements in semiarid Niger. *Water Resour Res* 2013, 49:3276–3291.
74. Creutzfeldt B, Ferré T, Troch P, Merz B, Wziontek H, Güntner A. Total water storage dynamics in response to climate variability and extremes: inference from long-term terrestrial gravity measurement. *J Geophys Res Atmos* 2012, 117:D08112.
75. Hector B, Hinderer J, Séguis L, Boy J-P, Calvo M, Desclotres M, Rosat S, Galle S, Riccardi U. Hydrogravimetry in West-Africa: first results from the Djougou (Benin) superconducting gravimeter. *J Geodyn* 2014, 80:34–49.
76. Scheftic W, Cummins KL, Krider EP, Sternberg BK. Wide-area soil moisture estimation using the propagation of lightning generated low-frequency electromagnetic signals. In: *20th International Lightning Detection Conference*, Tucson, Arizona, April 2008.
77. Huebner C, Kottmeier C, Brandelik A. A new approach towards large scale soil moisture mapping by radio waves. *Sens Imaging* 2011, 12:1–13.
78. Cooray V, Cummins KL. Propagation effects caused by stratified ground on electromagnetic fields of return strokes. In: *20th International Lightning Detection Conference*, Tucson, Arizona, 2008.
79. Kiseleva O, Hübner C, Brandelik A, Kalthoff N, Kohler M, Königer F, Kottmeier C. A new approach to

- investigate soil moisture dynamics by radio waves. In: *TERENO International Conference*, Tucson, Arizona, 2014, 3–35.
80. Yi F, Astin I. Remote sensing of soil moisture using the propagation of Loran-C navigation signals. *IEEE J Geosci Remote Sens Lett* 2015, 12:195–198.
 81. COSMOS-UK. About COSMOS-UK. Available at: <http://www.ceh.ac.uk/cosmos/about-cosmos-uk.html>. (Accessed May 11, 2015).
 82. Overeem A, Leijnse H, Uijlenhoet R. Measuring urban rainfall using microwave links from commercial cellular communication networks. *Water Resour Res* 2011, 47:W12505.
 83. Szegvary T, Conen F, Stoehlker U, Dubois G, Bossew P, de Vries G. Mapping terrestrial gamma-dose rate in Europe based on routine monitoring data. *Radiat Meas* 2007, 42:1561–1572.
 84. Bruyninx C, Habrich H, Söhne W, Kenyeres A, Stangl G, Völksen C. Enhancement of the EUREF permanent network services and products. In: Rizos C, and Willis P, eds. *Geodesy for Planet Earth*. IAG Symposia Series, vol. 136. Springer-Verlag, Heidelberg; 2012, 27–35.