

Improving the Design of Hydraulic Structures

A Unified 1D Simulation Tool for Highly Transient Water Flow

Kerger F.^{1,2}, Archambeau P.¹, Erpicum S.¹, Dewals B.J.^{1,2} and Pirotton M¹

¹Laboratory of Hydrology, Applied Hydrodynamics and Hydraulic Constructions, Institute of Civil Engineering,

ArGENCo Department, Liège University, Ch. Des Cheveruils 1, B52/3+1, B-4000 Liège

²Belgian Fund for Scientific Research F.R.S-FNRS

The project in a few words

Civil engineers face every days the challenge to improve the design of hydraulic structures for reasons of security, economical rentability and environmental preservation. In this **context**, they ought to rely on accurate simulation tools. In particular, difficulties arise when the dynamics of air/water interactions within the flow and the impact of the presence of entrapped air on the structure need to be accurately predicated.

The **ambition** of this project consists of creating an original algorithm to simulate a large spectrum of practical applications in a unified numerical framework. In this process, special attention will be given to the two-phase flow behaviour ! The existing finite volume modelling system WOLF, which is originally dedicated to free surface flow simulation, is used as a validated background of all the new development.

The **planification** of the modelling system improvement includes 4 steps:

1. Adapting the WOLF 1D module to pressurized flow.
2. Extending the resulting algorithm to take into account the air/water interaction with a two-phase formalism.
3. Integrating the air/water interaction within the quasi-2D module of WOLF as well.
4. Assessing the WOLF 3D module for two-phase flow purpose (currently in development by the HACH research team).

This poster highlights the rigorous **scientific approach** used to tackle the first step of the project : simulate free-surface flow and pressurized flow in a unified framework. It is shown how the theoretical development of a single set of equations based on the classical Preissmann slot and on an original negative slot had been implemented in the WOLF 1D module using a well established finite volume scheme. Finally, the validation of the new simulation tool performed on a published benchmark show its ability to simulate sub-atmospheric pressure.


Theoretical development

1. The classical Preissmann hypothesis sets out that a pressurized flow can be equally simulated through the free surface flow set of equations by adding a narrow slot at the top of the pipe.


CONSEQUENCE

- ⇒ Pipe dilatation and water compressibilité are rendered through the slot
- ⇒ Free surface celerity computed is equal to the pressure wave celerity


2. An **original negativ slot** is proposed to take into account sub-atmospheric flow.

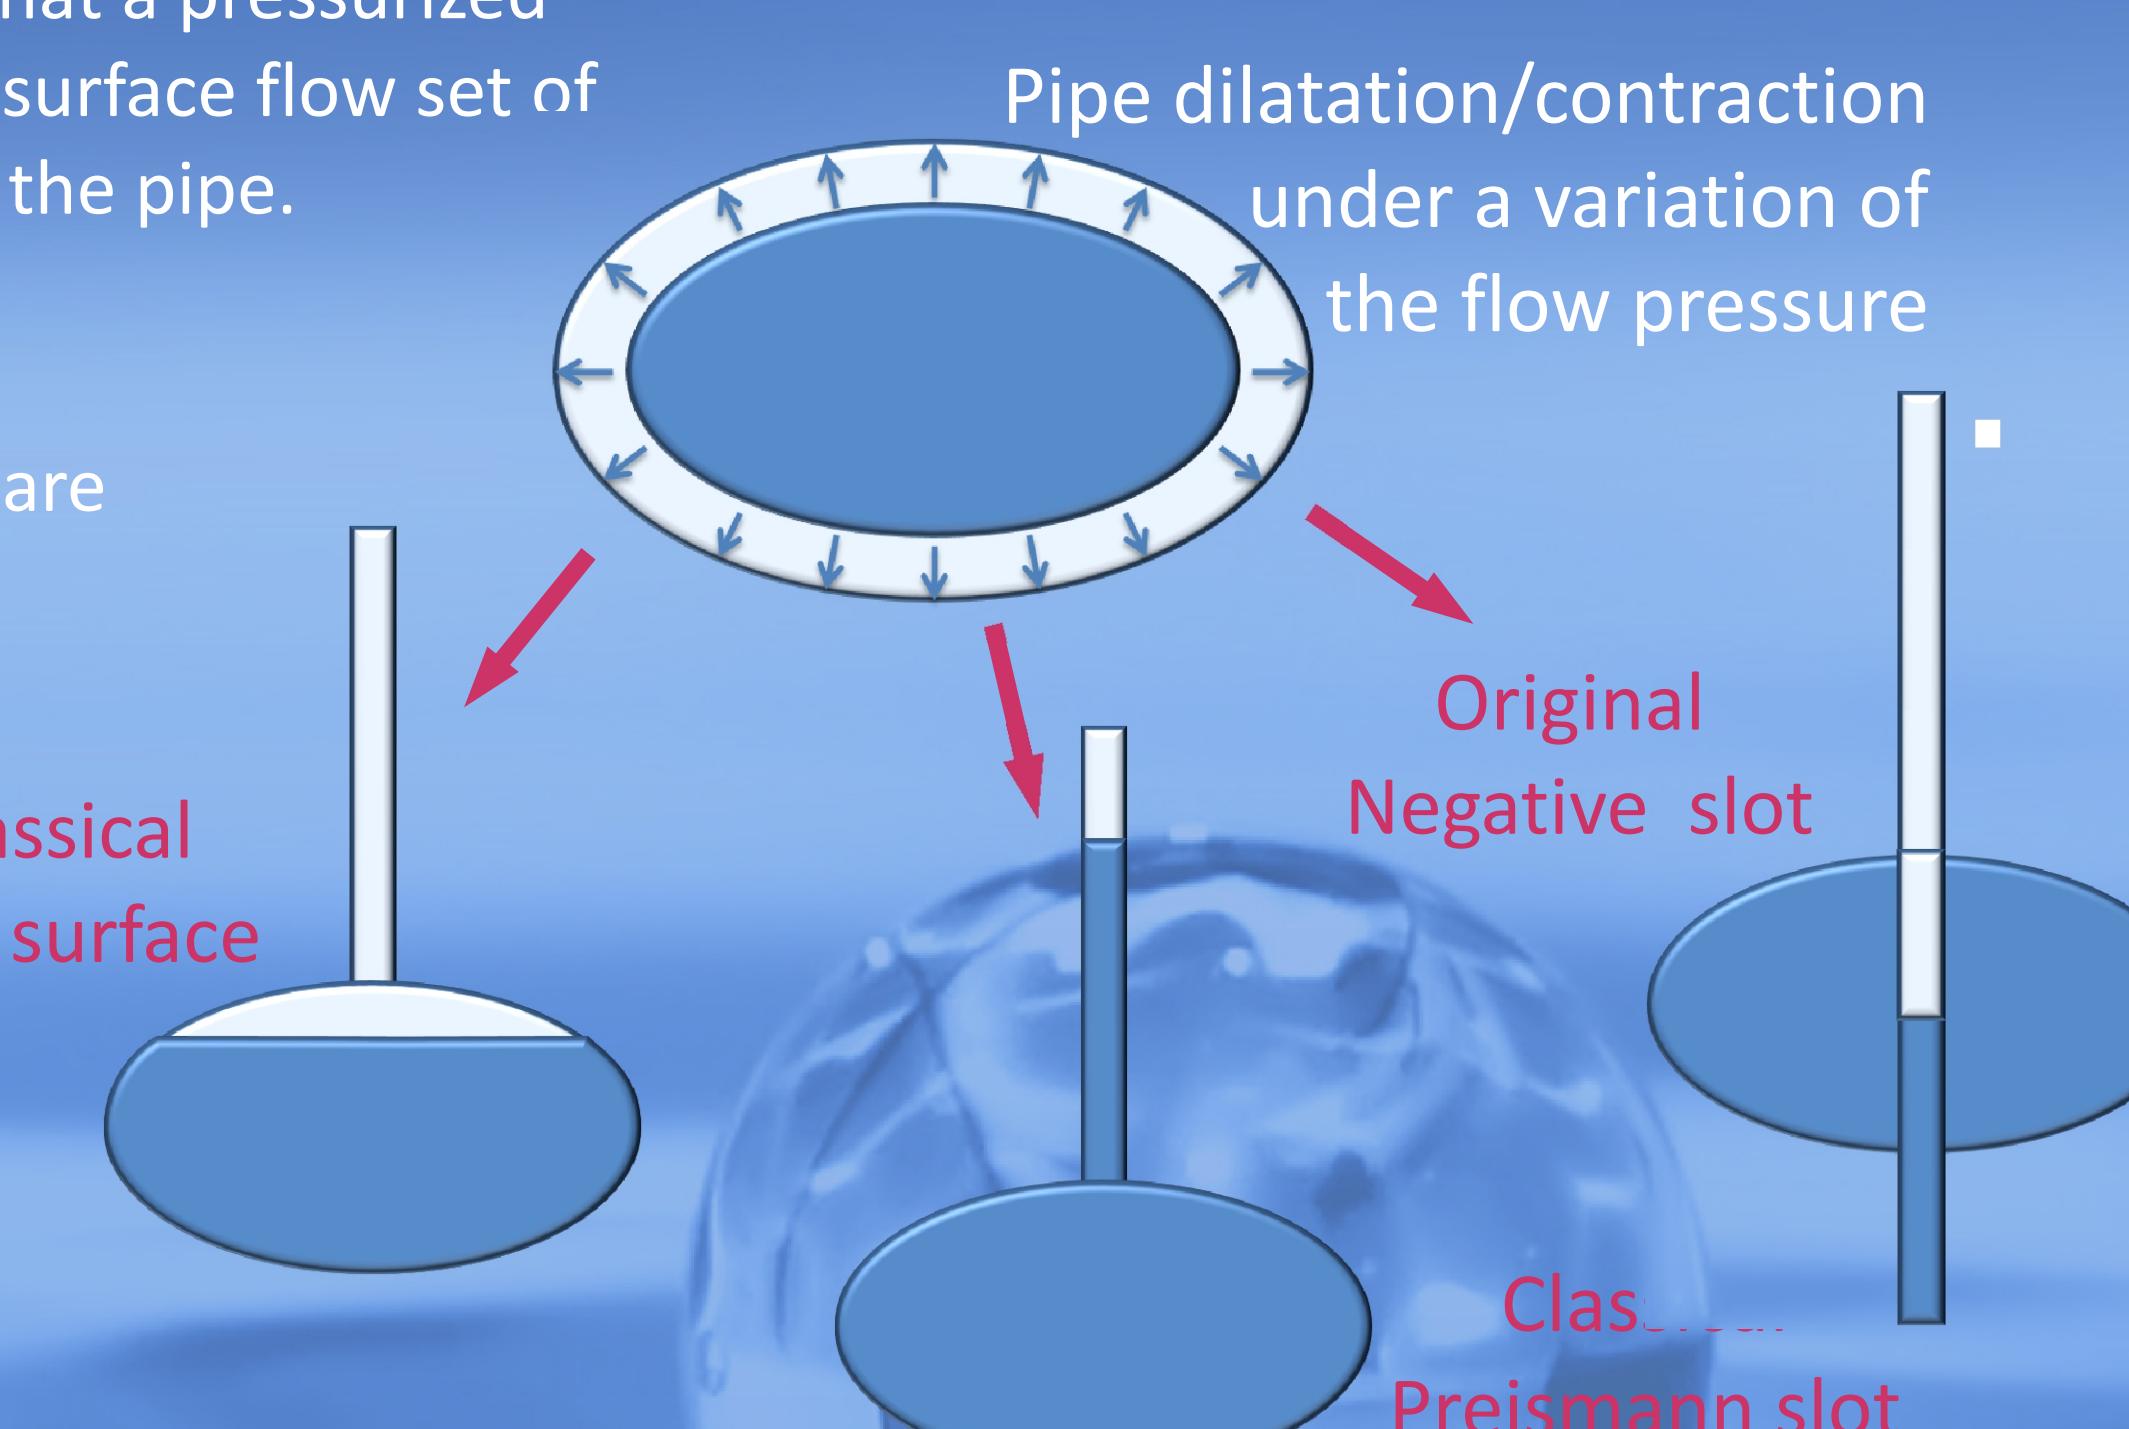

3. All the relevant geometrical information is implemented through the relation between the flow area, the water height.

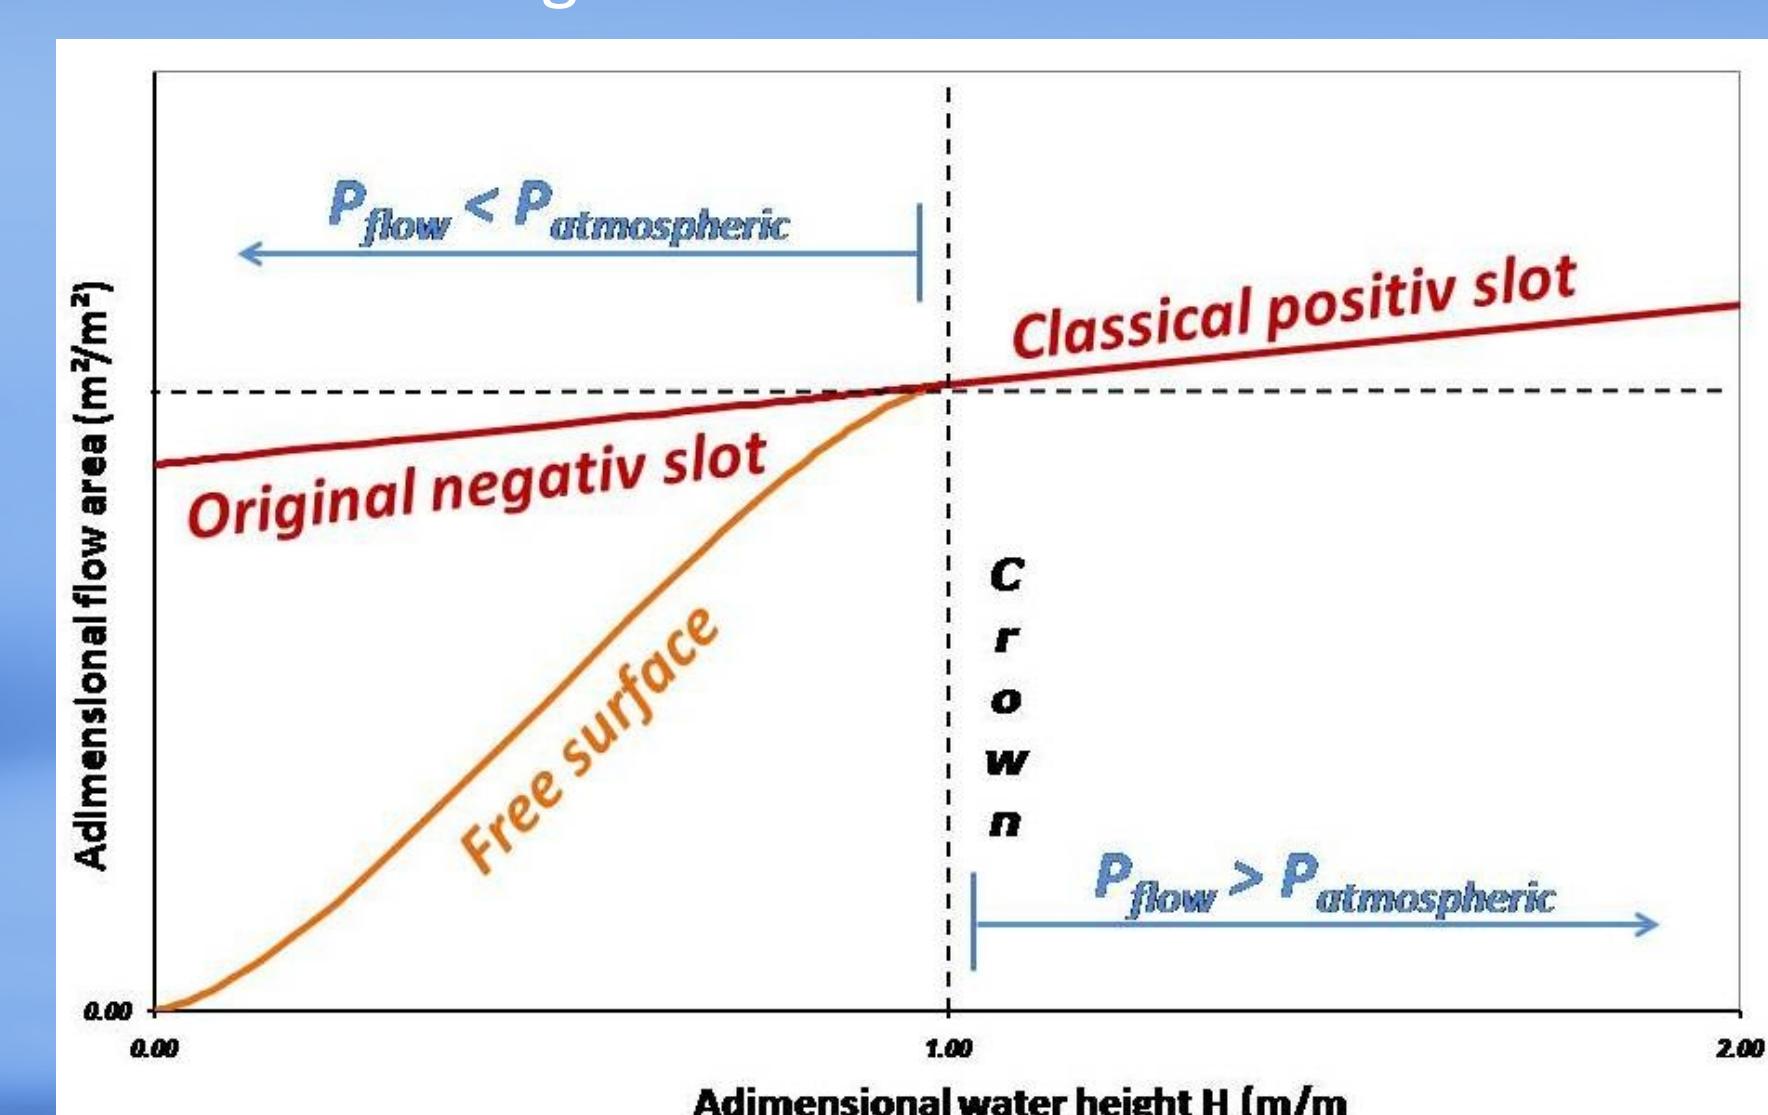

Model assessment on published benchmark

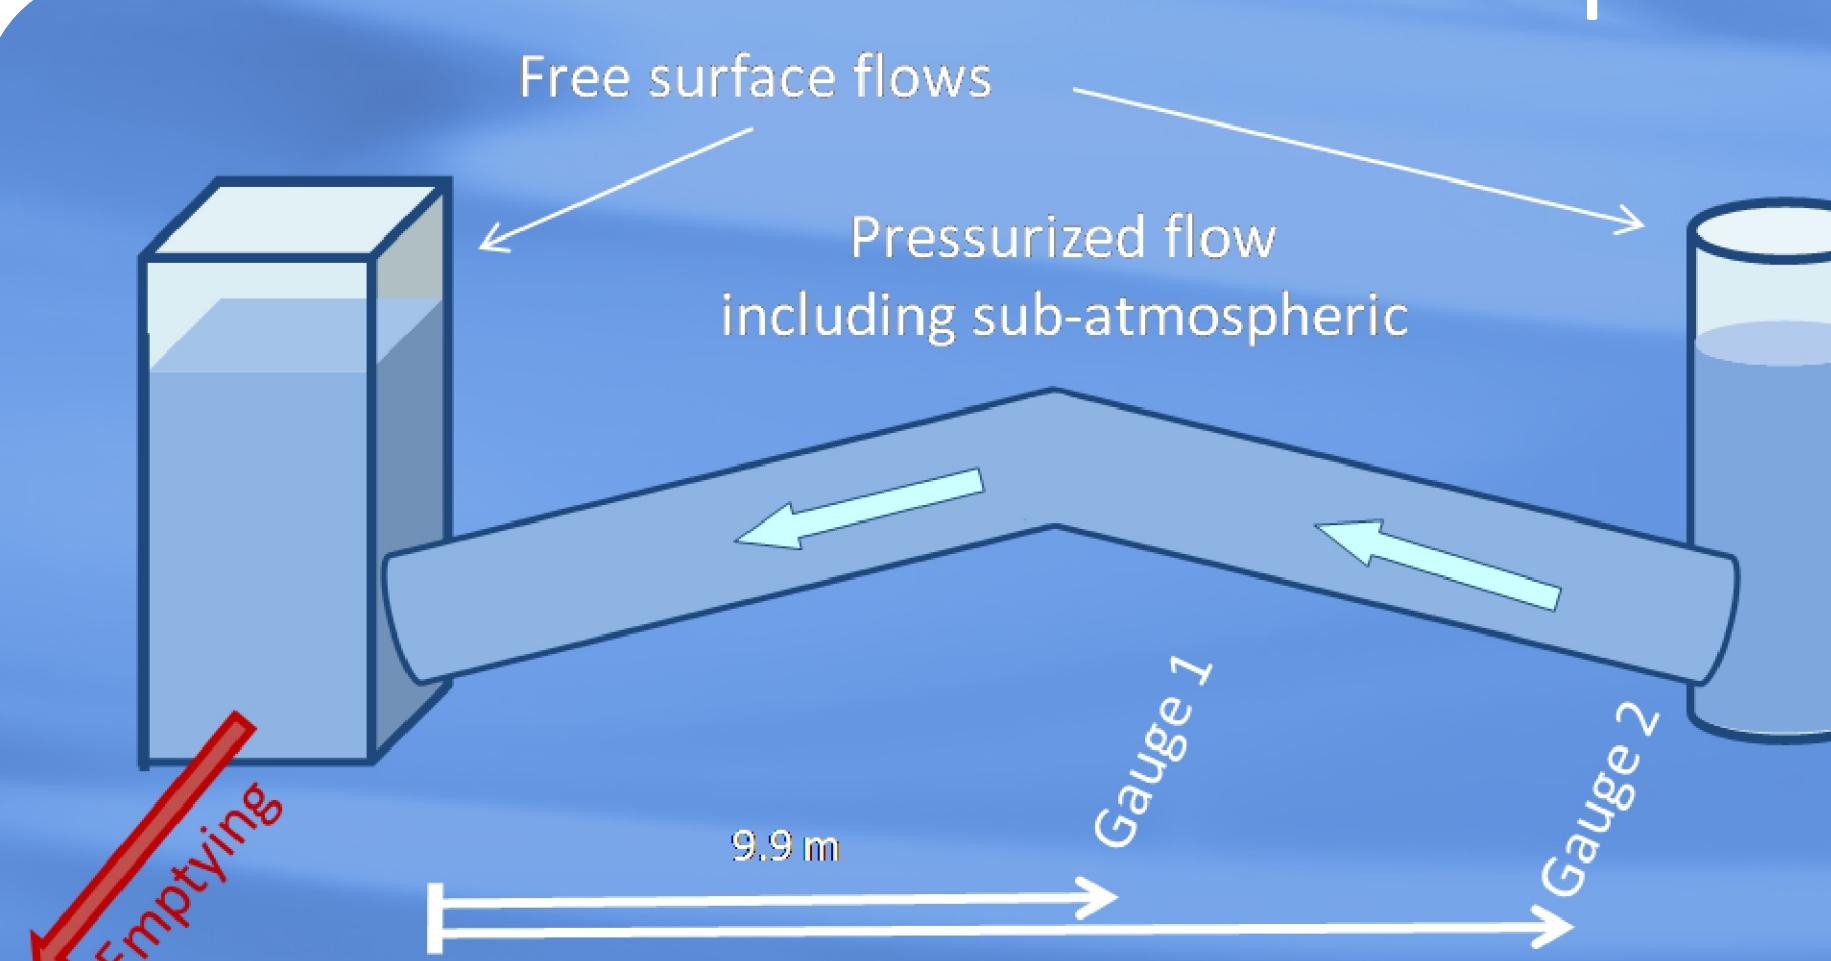

Experimental apparatus (Vasconcelos - 2005) :
1. 2 storage towers connected by a pipe.
2. The pipe has a length of 14.1 m, a diameter of 9.4 cm and a Manning-Strickler coefficient of 80.
3. The pipe reaches its top 15 cm above the basic level.

Experimental procedure :

- the initial level of water is 30 cm,
- a controlled valve is opened at the bottom of the cubical storage tower resulting in the emptying of the pipe at a rate of 0.45 l/s
- the combination of the water level decrease and the fluid velocity increase creates a sub-atmospheric pressure at the top of the pipe.
- the temporal evolution of the pressure head is measured by the gauge 1 and 2
- the temporal evolution of the velocity is followed at the gauge 1.

