

A. Barth, C. Troupin, S. Watelet &
J.-M. Beckers

GHER - ULiège



Status of Diva online as VRE application

SeaDataCloud 1st Plenary meeting

WP10.2.3

development of DIVA online (VRE)

WP11.2

Produce standard climatological data products for the global ocean and European Seas basins


WP11.3

Development of new products

WP11.5

Training on data products generation

Diva: from in situ data to gridded fields

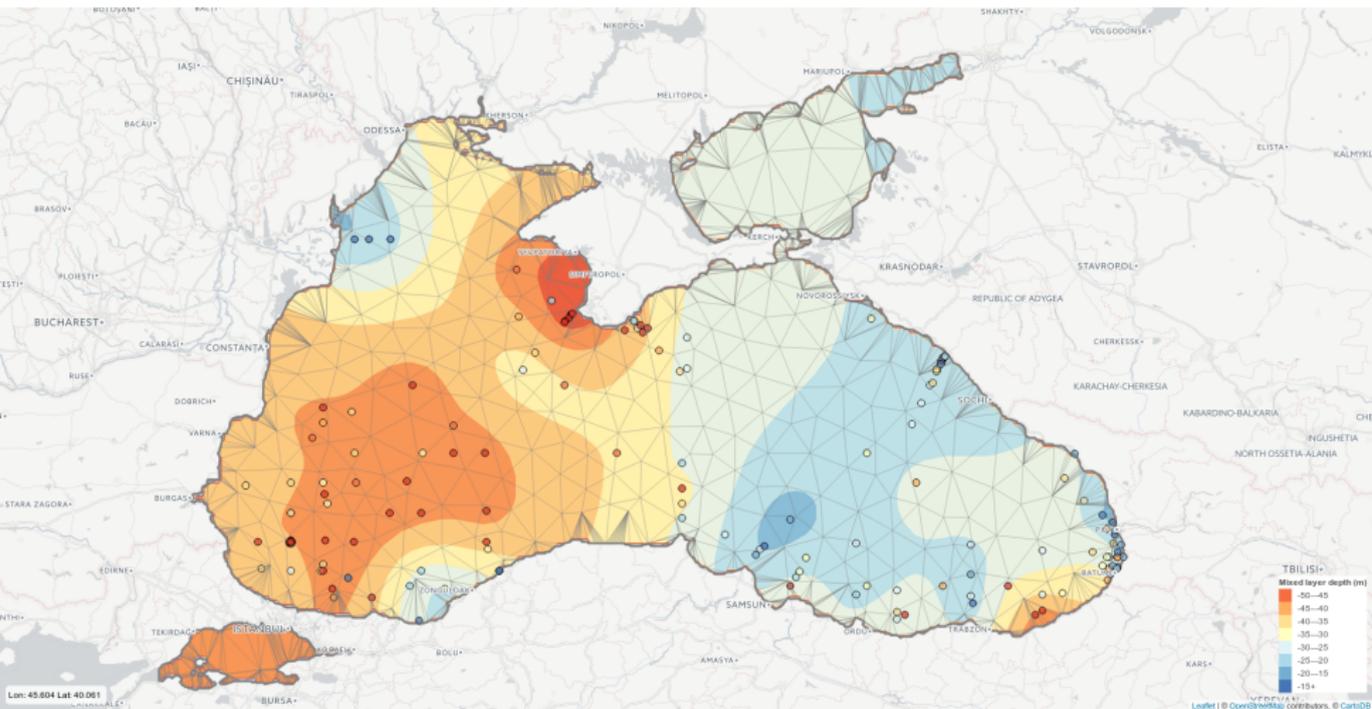

 <https://github.com/gher-ulg/DIVA>

DOI [10.5281/zenodo.836727](https://doi.org/10.5281/zenodo.836727)

 <https://www.geosci-model-dev.net/7/225/2014/gmd-7-225-2014.pdf>

 <https://github.com/gher-ulg/divand.jl>

divand-1.0: *n*-dimensional variational data analysis for ocean observations

A. Barth^{1,*}, J.-M. Beckers¹, C. Troupin², A. Alvera-Azcárate¹, and L. Vandenbulcke^{3,4}

¹GHER, University of Liège, Liège, Belgium

²IMEDEA, Esporles, Illes Balears, Spain

³seamod.ro/Jailoo srl, Sat Valeni, Com. Salatrucu, Jud. Arges, Romania

⁴CIIMAR, University of Porto, Porto, Portugal

** Invited contribution by A. Barth, recipient of the EGU Arne Richter Award for Outstanding Young Scientists 2010.*

Correspondence to: A. Barth (a.barth@ulg.ac.be)

Received: 7 June 2013 – Published in Geosci. Model Dev. Discuss.: 23 July 2013

Revised: 18 October 2013 – Accepted: 12 December 2013 – Published: 29 January 2014

2013: Octave/MATLAB

2016: Julia

faster, better, stronger

User interfaces:

*Jupyter notebooks
and WPS*

Notebooks combine:

- 1 code fragments that can be executed,
- 2 text for the description of the application and
- 3 figures illustrating the data or the results.

```
In [2]: import numpy as np
import matplotlib.pyplot as plt
```


Data

Let's create a simple function.

```
In [6]: x = np.arange(0, 6, .1)
y = np.cos(x) + 1.5 * np.sin(2 * x)
```

Make a simple plot

```
In [7]: plt.plot(x, y)
plt.show()
```

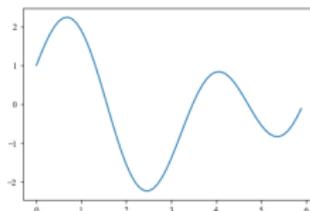

Notebooks combine:

- 1 code fragments that can be executed,
- 2 text for the description of the application and
- 3 figures illustrating the data or the results.

"Digital Playground"

"Data Story Telling"

"Computational Narratives"

Notebooks combine:


- 1 code fragments that can be executed,
- 2 text for the description of the application and
- 3 figures illustrating the data or the results.

"Interactive notebooks: Sharing the code", Nature (2014)

<http://www.nature.com/news/>

[interactive-notebooks-sharing-the-code-1.16261](http://www.nature.com/news/interactive-notebooks-sharing-the-code-1.16261)


```
In [36]: # sets the correct aspect ratio  
gca()[[:set_aspect](1/cos(mean(latr) * pi/180))
```

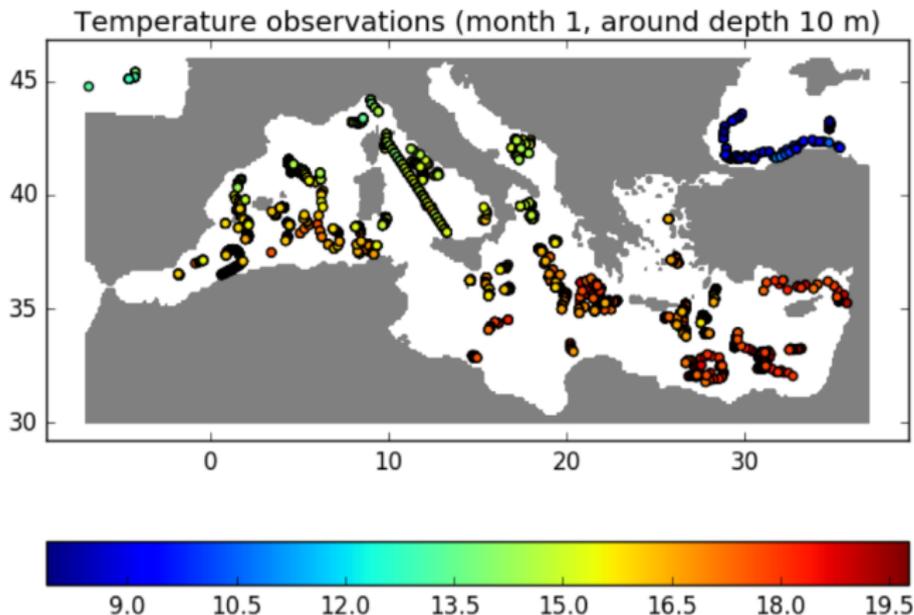

Setup the domain using the bathymetry from the file bathname.

○ trajectories:

- [Read_drifter_data_1.ipynb](#): read a netCDF file containing a surface drifter trajectory.
- [Read_drifter_data_2.ipynb](#): scatter plot using the data from the previous example.
- [Read_drifter_data_3.ipynb](#): creation of a gridded field using the same data.

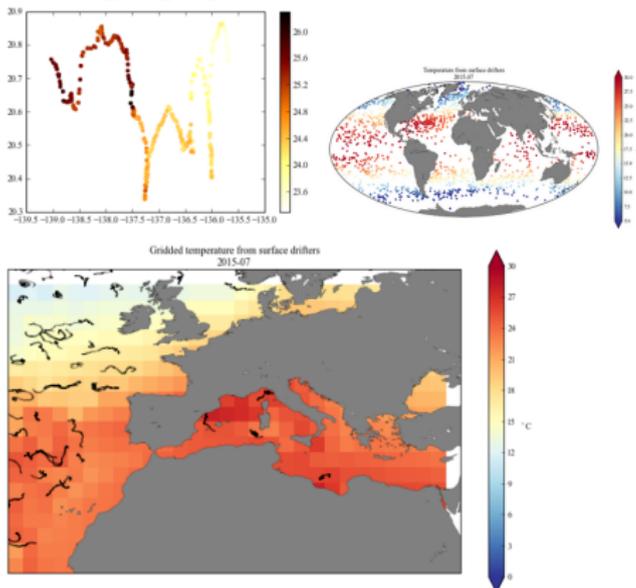

WP10.2.3



Management of multiple instances
of the single-user Jupyter notebook server

 jupyter

Control Panel Logout

Files Running Clusters

Select items to perform actions on them.

Upload New ↻

Projects / SeaDataCloud / Julia		Name ↑	Last Modified ↑
<input type="checkbox"/>	..		seconds ago
<input type="checkbox"/>	data		a month ago
<input type="checkbox"/>	test		4 months ago
<input type="checkbox"/>	 DIVAnd+in+Jupyter+Notebook.ipynb		5 months ago
<input type="checkbox"/>	 DIVAnd_EUDAT_example_pub.ipynb		5 months ago

 <https://github.com/jupyterhub/jupyterhub>

Demo: <https://hub-test.oceanbrowser.net/> (deployed at CINECA)

(Brand) New product

*Velocity field from
HF radar*


Ibiza Channel, data from SOCIB



2 antennas located in Ibiza and Formentera



Each antenna provide **radial** currents

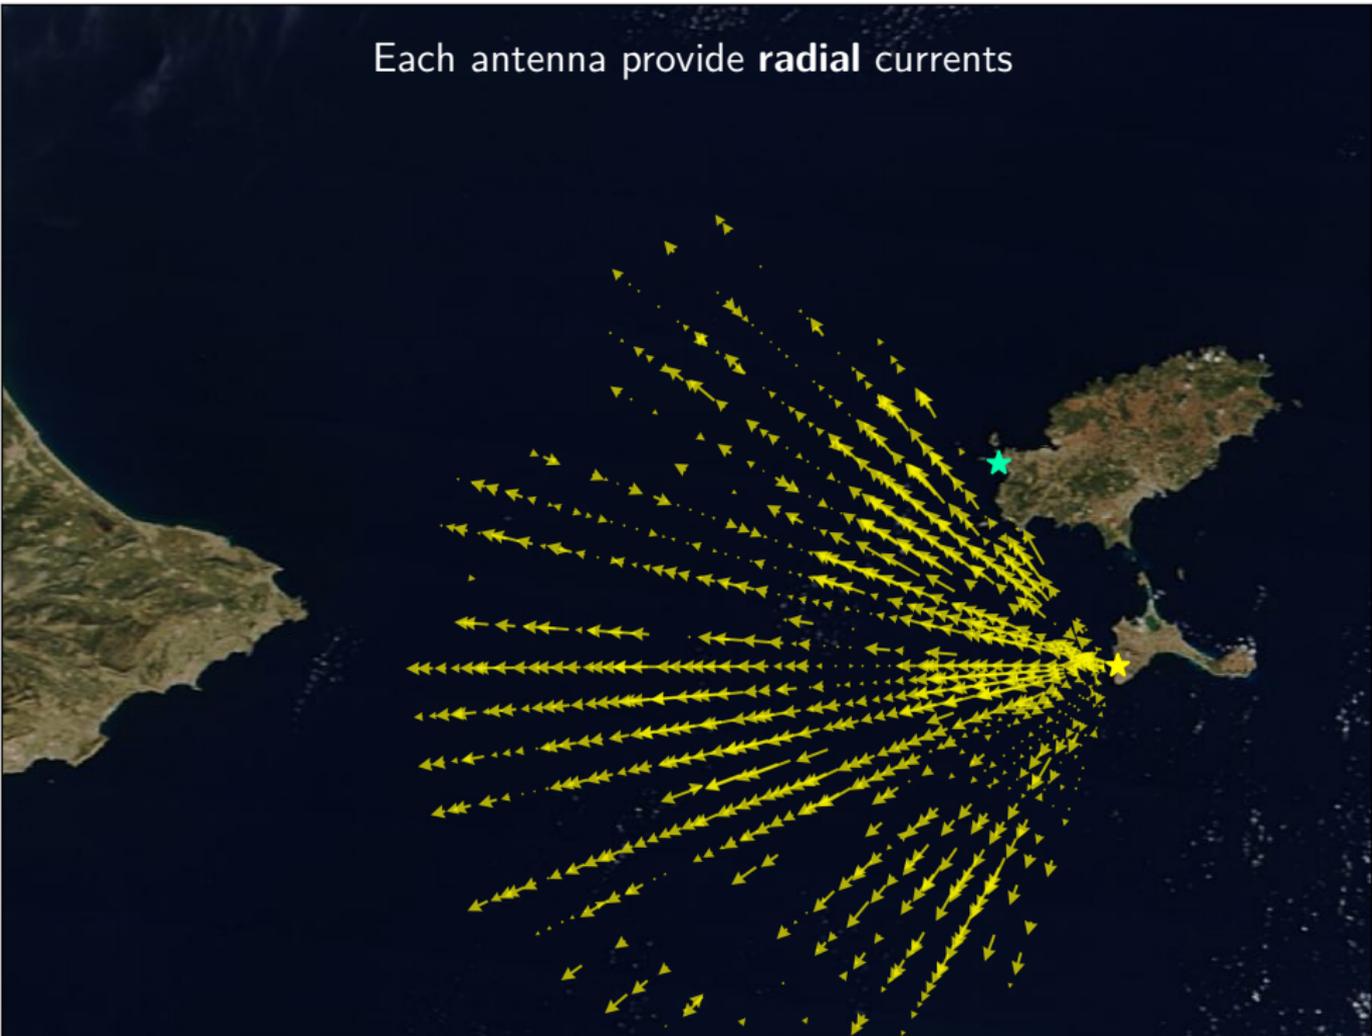


Each antenna provide **radial** currents



Total velocities are derived on a regular grid



- hypothetical measurement
- analyzed field

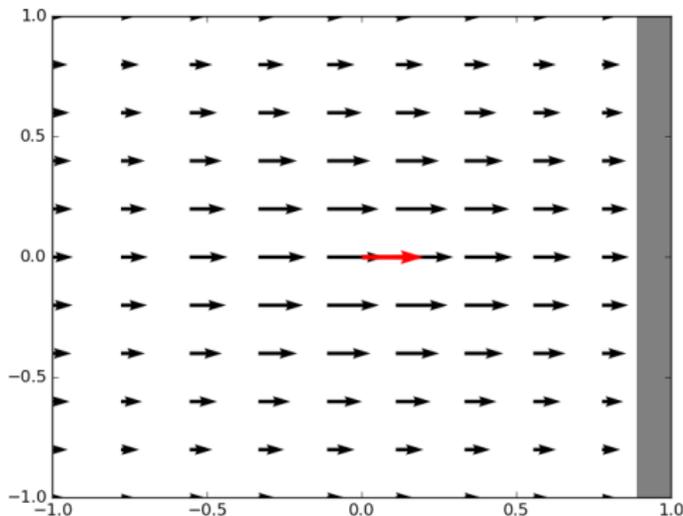

- ▶ Analysis of radial currents to derive total currents
- ▶ Observation operator links the radial currents of the different radar sites

$$\text{Norm : } |\varphi|^2 = \int_{\Omega} (\alpha_2 \nabla \nabla \varphi : \nabla \nabla \varphi + \alpha_1 \nabla \varphi \cdot \nabla \varphi + \alpha_0 \varphi^2) d\Omega$$


$$\text{Cost function: } J(\vec{u}) = |u|^2 + |v|^2 + \sum_{i=1}^N \frac{(\vec{u}_i \cdot \vec{p}_i - u_{r_i})^2}{\epsilon_i^2}$$

$$\vec{u} = (u, v)$$

\vec{p}_i = normalized vector pointing toward the correspond HF radar site of the i -th radial observation u_{r_i}


Cost function (OFF)

$$J_{bc}(\vec{u}) = \frac{1}{\epsilon_{bc}^2} \int_{\partial\Omega} (\vec{u} \cdot \vec{n})^2 ds$$

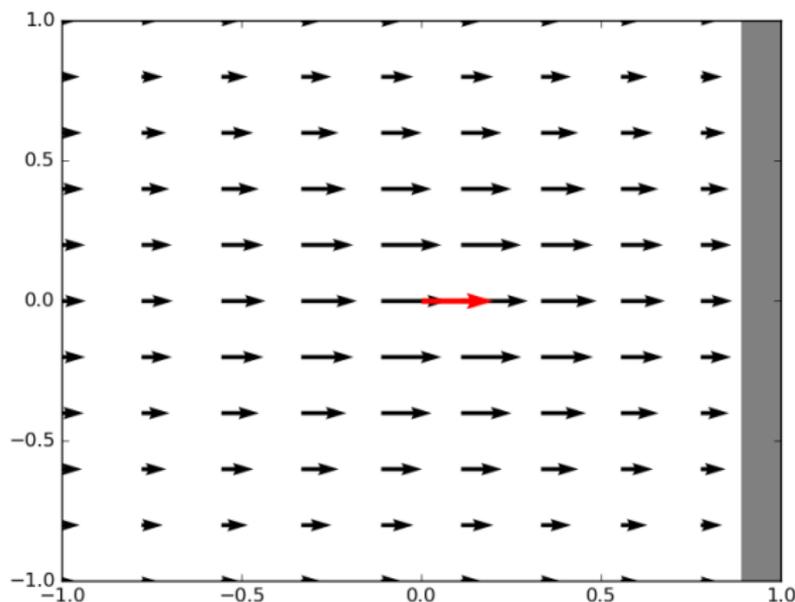

Cost function (ON)

$$J_{bc}(\vec{u}) = \frac{1}{\epsilon_{bc}^2} \int_{\partial\Omega} (\vec{u} \cdot \vec{n})^2 ds$$

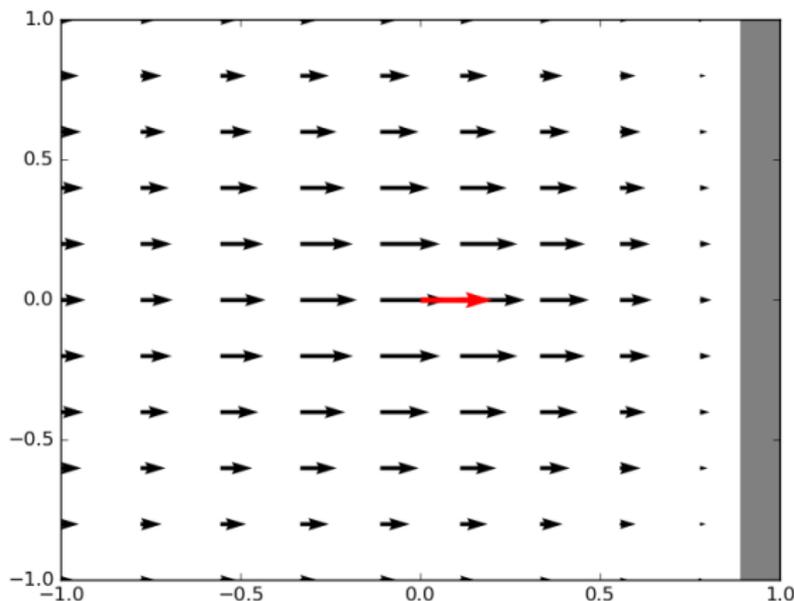


Low horizontal divergence of currents ($\nabla \cdot \vec{n} = 0$)



Cost function (OFF)


$$J_{div}(\vec{u}) = \frac{1}{\epsilon_{div}^2} \int_{\Omega} (\vec{\nabla} \cdot \vec{u})^2 dx$$

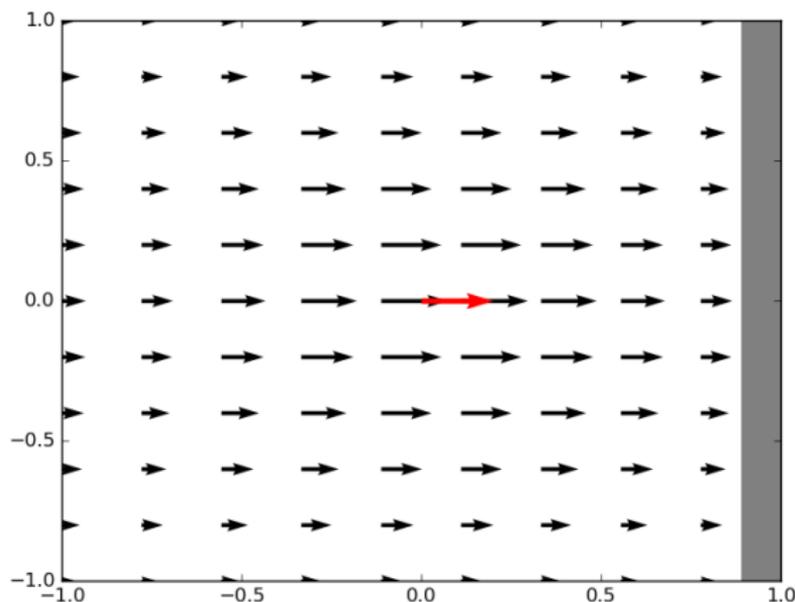

Low horizontal divergence of currents ($\nabla \cdot \vec{n} = 0$)

Cost function (ON)

$$J_{div}(\vec{u}) = \frac{1}{\epsilon_{div}^2} \int_{\Omega} (\vec{\nabla} \cdot \vec{u})^2 dx$$

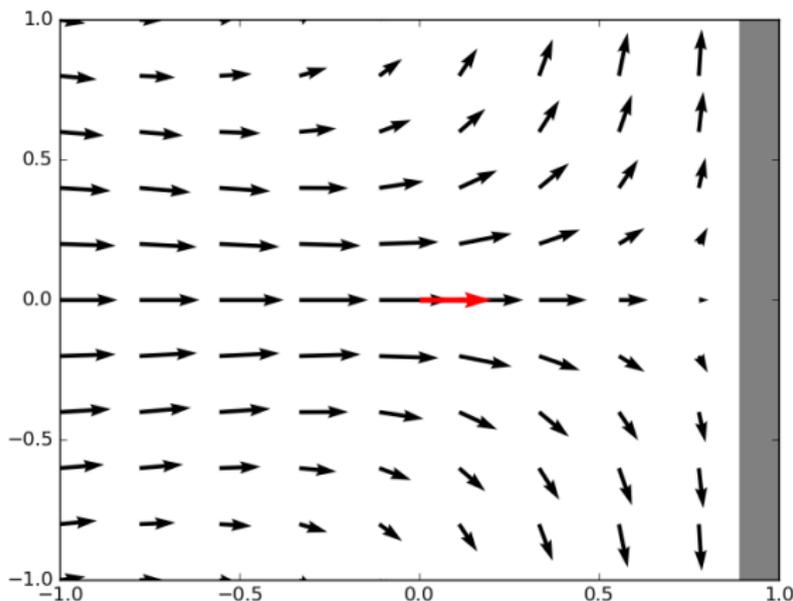

- ▶ Include the data the hour before and after
- ▶ Temporal correlation length
- ▶ Coriolis force


Coriolis force and geostrophically balanced mean flow

$$\begin{aligned}\frac{\partial u}{\partial t} &= fv - g \frac{\partial \eta}{\partial x} \\ \frac{\partial v}{\partial t} &= -fu - g \frac{\partial \eta}{\partial y}\end{aligned}$$

f = Coriolis frequency

η = sea surface elevation

In 30 current maps with the best coverage, some data points are marked as missing (for both sites)

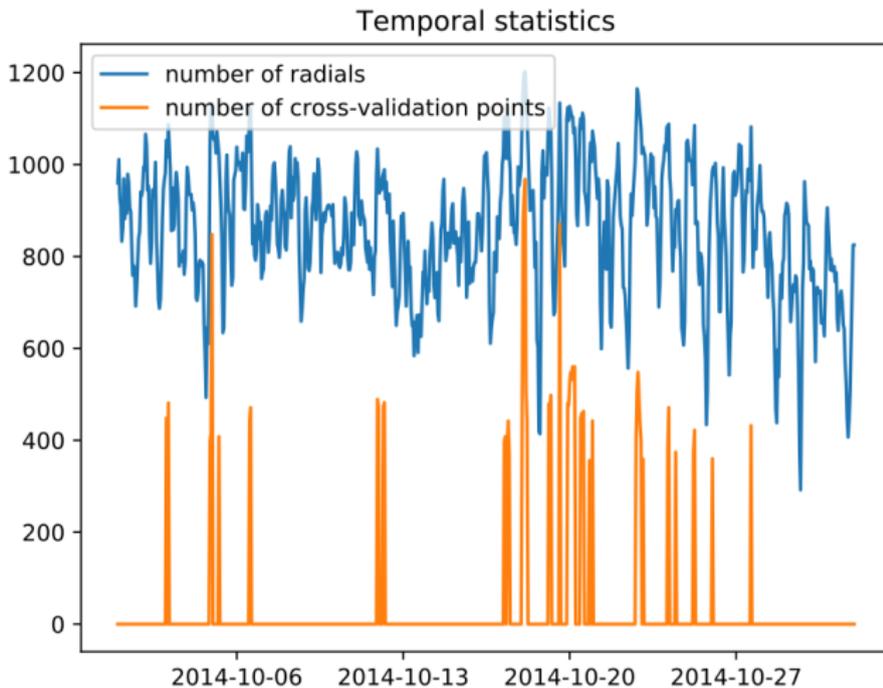

Test cases: more constrains (physics) included



Case	Description
2D	classical 2D-analysis (longitude, latitude)
2D_bc	as 2D, but with boundary conditions
2D_iv	as 2D, but imposing small horizontal divergence
3D	3D-analysis (longitude, latitude, time)
3D_Coriolis	3D-analysis with the Coriolis force
3D_Coriolis_geo	3D-analysis with the Coriolis force and the surface pressure gradient

$$S(\text{Case}) = 1 - \frac{\text{MSE}(\text{Case})}{\text{MSE}(2D)}$$

- ▶ The 2D case is the base-line for computing the relative improvement
- ▶ $\text{MSE}(C)$ is the mean square error (relative to the cross-validation dataset)
- ▶ If $S = 0$: reconstruction as "good/bad" as the base-line
- ▶ If $S = 1$: reconstruction matches perfectly the validation dataset.

Comparison: increased skill with more constrains



Case	RMS	Skill score	Optimal parameter(s)
2D	0.0652	0.000	$\epsilon^2=0.0001161$
2D_bc	0.0652	0.000	$\epsilon^2=0.0001, \epsilon_{bc}^2=10$
2D_div	0.0650	0.005	$\epsilon^2=9.799e-05, \epsilon_{div}^2=2.778e+08$
3D	0.0606	0.134	$\epsilon^2=0.1219, \text{lent}=6904$
3D_Coriolis	0.0547	0.295	$\epsilon^2=5.673e-05, \epsilon_{Cor}^2=9.207e-05$
3D_Coriolis_geo	0.0485	0.447	$\epsilon^2=5.37e-05, \epsilon_{Cor}^2=5.65e-05, \text{ratio}=26.46$

WP11.5

Diva workshop: 2–6 April 2018, Liège, Belgium

WP11.5

Diva workshop: 2–6 April 2018, Liège, Belgium

Diva pre-workshop: 18 October 2017, Athens, Greece (4PM?)

Questions?



$$\begin{aligned}
 & K^{n,m}(r) \\
 = & c^{n,m} \frac{(2\pi)^{-\frac{n}{2}}}{2(1-m)} r^{\frac{2-n}{2}} \int_0^\infty J_{\frac{n-2}{2}}(kr) k^{\frac{n-2}{2}} \frac{d}{dk} \left(\frac{1}{(1+k^2)^{m-1}} \right) dk \\
 = & c^{n,m} \frac{(2\pi)^{-\frac{n}{2}}}{2(m-1)} r^{\frac{4-n}{2}} \int_0^\infty J_{\frac{n-4}{2}}(kr) k^{\frac{n-4}{2}} \frac{k}{(1+k^2)^{m-1}} dk \\
 = & \frac{1}{4\pi(m-1)} \frac{c^{n,m}}{c^{n-2,m-1}} K^{n-2,m-1}(r)
 \end{aligned}$$

n is the dimension

m is the highest derivative

where

$K^{n,m}$ is the Kernel

$J_\nu(r)$ is the Bessel function of first kind or order ν

Questions?

